

 ADEXUSA




Traditional tiles for contemporary people

EARTH

Crackle Wall Tile

GARDEN STATE TILE

Together We Can Design For Life

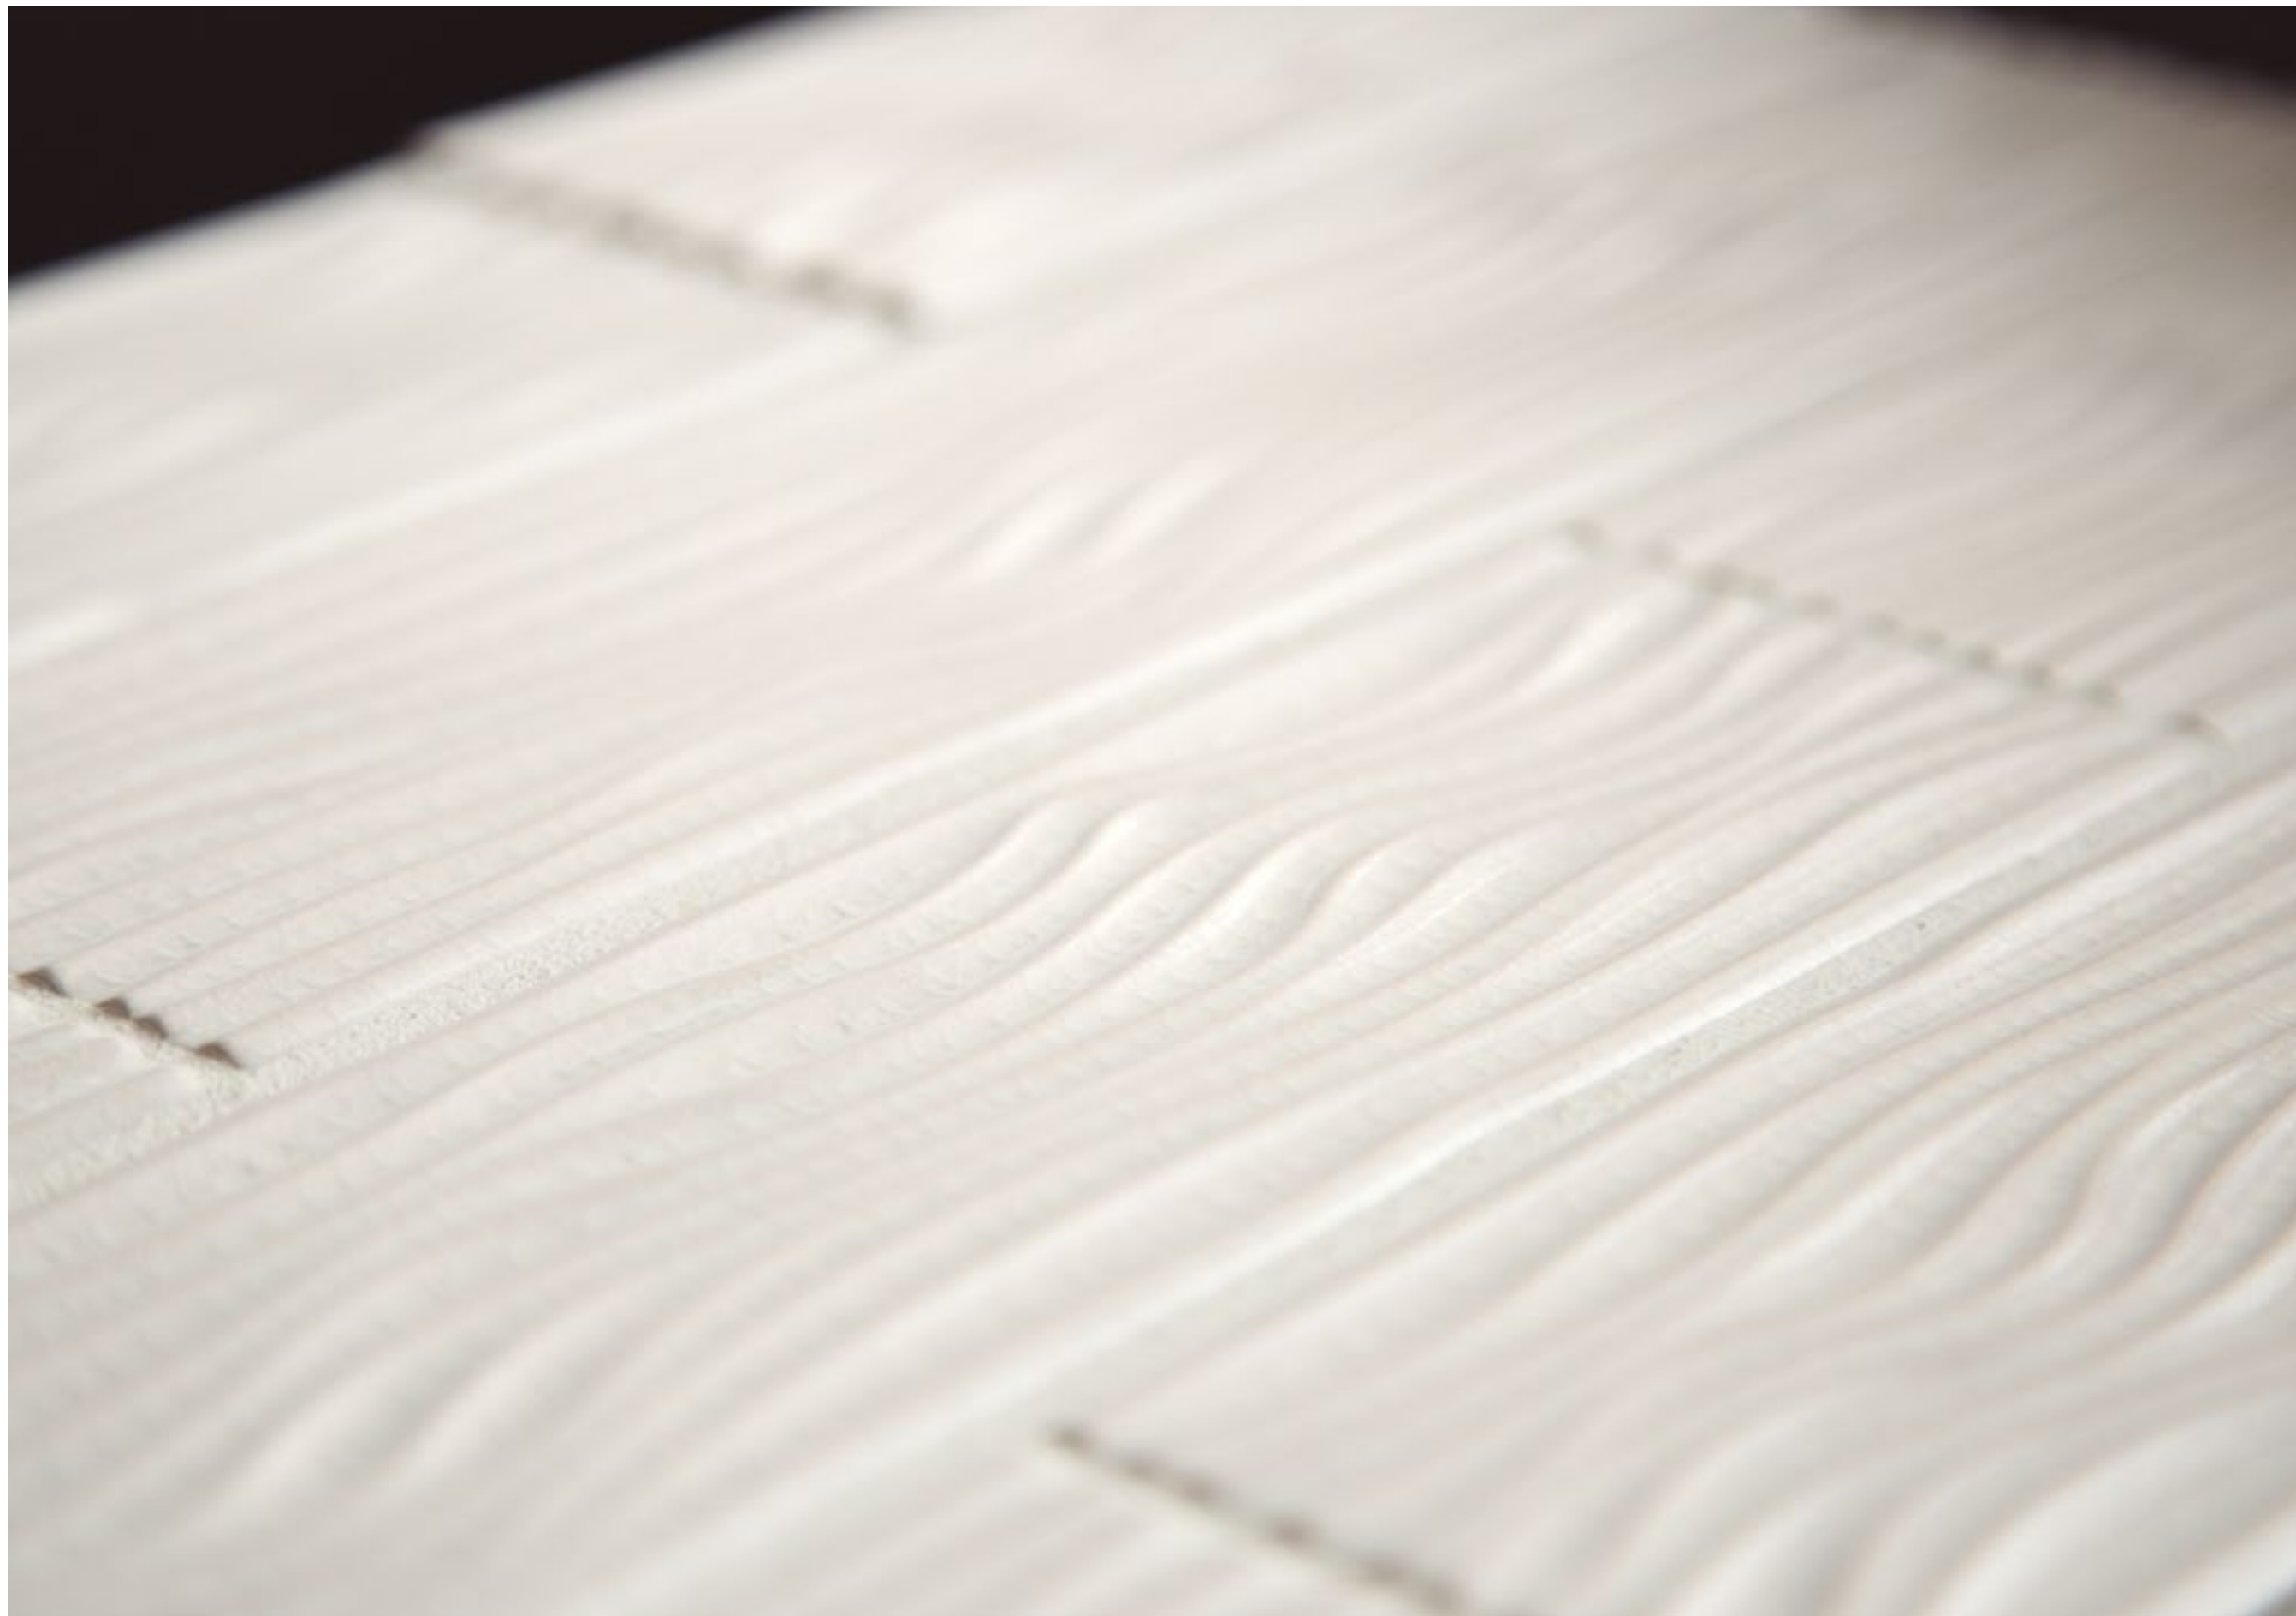

Navajo White

Fawn

Ash Gray

Morning Sky

MATTE CRACKLE

SEMI-MATTE FINISH · SLIGHTLY UNDULATED SURFACE

The Matte Crackle / Earth Collection is a unique combination of a sophisticated yet rustic tile, a semi-matte crackled glaze and an updated color palette. The hand-molded surface and the options of a smooth, textured or raised pattern surface add to its uniqueness and appeal. Beautiful 6"x6" dimensional inserts and the finishing touches from crown moldings to baseboards allows each installation to be detailed and tailored to fit the most impeccable taste. Design options abound and you will be thrilled with its aesthetic and functional contribution to bathrooms, showers, kitchens and more. The style, components and soothing color palette makes this a choice for Contemporary, Rustic and Traditional styling.

Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.




FIELD TILES

UNDULATED




ADEW836 3"x6"



ADEW831 3"x12"

TEXTURED



ADEW836T 3"x6"



ADEW831T 3"x12"




ADEW101 3"x6" Waves



ADEW102 3"x12" Waves

TRIMS

FINISHING EDGES



FE



FE Corner

ADEW506	FE 0.5"x6"
ADEW512	FE 0.6"x12"
ADEW500	FE Corner 6"
ADEW501	FE Corner 12"

DECORATIVE ACCESORIES



ADEW502 6"x6" Energy Deco




ADEW503 6"x6" Cosmos Deco



ADEW206 1"x6" Bar Liner



ADEW207 1"x12" Bar Liner



ADEW204 1"x6" Quarter Round



ADEW205 Beak

FINISHING TOUCHES



ADEW200 2.4"x6" Molding



ADEW201 2.4"x12" Molding



ADEW809 5.1"x6" Base Board (Glazed Top Edge)



ADEW810 5.1"x12" Base Board (Glazed Top Edge)

END CAPS



ADEW202

FRAME CORNERS



ADEW203




ADEW899



FIELD TILES

UNDULATED




ADEF836 3"x6"




ADEF831 3"x12"


TEXTURED



ADEF836T 3"x6"



ADEF831T 3"x12"




ADEF101 3"x6" Waves



ADEF102 3"x12" Waves

TRIMS

FINISHING EDGES



FE



FE Corner

ADEF506	FE 0.5"x6"
ADEF512	FE 0.6"x12"
ADEF500	FE Corner 6"
ADEF501	FE Corner 12"

DECORATIVE ACCESORIES



ADEF502 6"x6" Energy Deco




ADEF503 6"x6" Cosmos Deco



ADEF206 1"x6" Bar Liner



ADEF207 1"x12" Bar Liner




ADEF204 1"x6" Quarter Round




ADEF205 Beak

FINISHING TOUCHES



ADEF200 2.4"x6" Molding



ADEF201 2.4"x12" Molding



ADEF809 5.1"x6" Base Board
(Glazed Top Edge)



ADEF810 5.1"x12" Base Board
(Glazed Top Edge)

END CAPS



ADEF202

FRAME CORNERS



ADEF203




ADEF899



FIELD TILES

UNDULATED




ADEG836 3"x6"




ADEG831 3"x12"

TEXTURED



ADEG836T 3"x6"



ADEG831T 3"x12"




ADEG101 3"x6" Waves



ADEG102 3"x12" Waves

TRIMS

FINISHING EDGES



FE



FE Corner

ADEG506	FE 0.5"x6"
ADEG512	FE 0.6"x12"
ADEG500	FE Corner 6"
ADEG501	FE Corner 12"

DECORATIVE ACCESORIES



ADEG502 6"x6" Energy Deco




ADEG503 6"x6" Cosmos Deco



ADEG206 1"x6" Bar Liner



ADEG207 1"x12" Bar Liner



ADEG204 1"x6" Quarter Round



ADEG205 Beak

FINISHING TOUCHES



ADEG200 2.4"x6" Molding



ADEG201 2.4"x12" Molding



ADEG809 5.1"x6" Base Board (Glazed Top Edge)



ADEG810 5.1"x12" Base Board (Glazed Top Edge)

END CAPS



ADEG202

FRAME CORNERS




ADEG203

ADEG899




FIELD TILES

UNDULATED




ADEM836 3"x6"




ADEM831 3"x12"


TEXTURED



ADEM836T 3"x6"



ADEM831T 3"x12"




ADEM101 3"x6" Waves



ADEM102 3"x12" Waves

TRIMS

FINISHING EDGES



FE



FE Corner

ADEM506	FE 0.5"x6"
ADEM512	FE 0.6"x12"
ADEM500	FE Corner 6"
ADEM501	FE Corner 12"

DECORATIVE ACCESORIES



ADEM502 6"x6" Energy Deco




ADEM503 6"x6" Cosmos Deco



ADEM206 1"x6" Bar Liner



ADEM207 1"x12" Bar Liner



ADEM204 1"x6" Quarter Round



ADEM205 Beak

FINISHING TOUCHES



ADEM200 2.4"x6" Molding



ADEM201 2.4"x12" Molding



ADEM809 5.1"x6" Base Board
(Glazed Top Edge)



ADEM810 5.1"x12" Base Board
(Glazed Top Edge)

END CAPS



ADEM202



ADEM899

FRAME CORNERS



ADEM203



INSTALLATION & MAINTENANCE



We recommend all our tiles to be installed using the prevailing guidelines as set forth in the TCNA (Tile Council of North America) Handbook and the ANSI (American National Standards Institute) specifications.

PRIOR TO INSTALLATION

The surface where the product is going to be installed must be clean and level.

We strongly recommend dry laying prior to installation. Blending of the ceramic tile glaze is key to insuring a pleasing overall look to your room. This will resolve any color or size issues prior to installation and will serve as a review of tile placement.

INSTALLATION GUIDELINES

SETTING MATERIALS

Adhesive – Install with any high-quality ceramic tile adhesive suitable to the intended application.

Mud installation can be done as well. All setting materials and installation methods should be performed using the prevailing guidelines set by the Tile Council of America and the ANSI.

GROUT

Unsanded grout is typically used for grout joints 1/8" or smaller.

Sanded grout is recommended for grout joints larger than 1/8", as long as the excess material is removed with a damp sponge. Using notched trowels or grout floats might scratch the tile.

The color of the grout should be as close as possible to the color of your tile.

NOTE: We use Sanded grout in most of our display boards to keep them intact during shipping.

METHOD

Follow standard ceramic tile installation procedures provided by the TCNA (Tile Council of North America) Handbook and the ANSI (American National Standards Institute) specifications.

Relief decorative borders or liners can be taped off during grouting to facilitate cleanup.

To help keep border, liner and molding grout joints tight, offset the joints between field tile, trim and accent rows.

*SEALING

Sealing is not required for Solid Glazes.

Sealing is mandatory for Crackle Glazes. We recommend to seal our tiles with a penetrating sealer before and after grouting.

1. The sealer penetrates the fine, hairline fissures in the glaze and prevents dirt and dusk darkening the crackle over a period of time.

2. Sealing the crackled glaze makes it easier to maintain and clean.

3. Proper application of the sealer (wipe off any excess from glazed surface) will not harm or change the appearance of the tile.

4. We do not recommend the use of contrasting grouts with this type of glaze.

We recommend the following products and procedures:

Once the tile is mounted on the wall and before grouting, the tile surface must be clean and free of dirt and dust. Use the **FILAMP90 - Natural Look Penetrating Sealer** (Available in our Price List v.101) which is a solvent based sealer. Apply an even coat of FILAMP90 with a paintbrush or lambswool applicator pad. Wait 24 Hours to allow the product to cure. Apply grout with a sponge evenly distributing grout over joints. **Do not use a grout float.**

NOTE: When using Contrasting Color Grouts, it is imperative that the tiles are thoroughly sealed to avoid the discoloration from the grout pigment. Please follow the mixing grouting instructions of the Grout Manufacturer.

Once the grouting is completed and allowed to dry, the surface of the tiles must be cleaned using **FILA CLEANER - Neutral Cleaner** (Available in our Price List v.101) observing the following guidelines: Dilute to 1:30. Clean the surface with a cloth and scrubbing brush. Remove any residue and rinse thoroughly.

After the thorough cleaning of the surface and grout residue, the tile will need to be resealed using the **FILAMP90 - Natural Look Penetrating Sealer** (Available in our Price List v.101) observing the following guidelines: Apply an even coat of FILAMP90 with a paintbrush or lambswool applicator pad. Wipe off product excess after 15 minutes, making sure to rub the product and help its complete penetration into the material. Wait 24 Hours to allow the product to cure.

NOTE: Future Sealing of the product should be done if you see any discoloration/darkening in the body of the tile. This will vary by end usage, care and maintenance products and tools used.

If you use any other sealer, please check with the manufacturer for the proper instructions and products to use for sealing crackled glaze ceramic tile.

MAINTENANCE

Walls and counters: clean glazed ceramic tile regularly with a non-abrasive/non-acidic, mild and PH neutral cleaner.

We recommend **FILA CLEANER - Neutral Cleaner** (Available in our Price List v.101) for all cleaning purposes of our tile.

Sealer: Reapply to grout joints and crackle glazes periodically as needed. When water no longer beads on the surface of the joints, resealing is required.

GLASS MOSAICS

Our Vintage Hex 1" mosaics are molten glass mosaics. Molten glass characteristics include some variation in size, shade and irregular edges. These characteristics are inherent in standard production and aesthetics of the product.

The subtle size and shape variations impact the final grout joint appearance and enhance the natural visual of the product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Water, grease, oil, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

Grout joint recommendations: 1/16" on average.

PLEASE NOTE

We assume no responsibility for installation.

This information is to be used as a guideline only and should be discussed with a professional and accredited tile installer.

*We Recommend:

FILA MP90 Penetrating Sealer



FILA Neutral Cleaner



CARE & MAINTENANCE	SOLID GLAZE	TRANSLUCENT GLAZE	MATTE CRACKLE	MICRO CRACKLE	CLASSIC CRACKLE	DIMENSIONAL FIELD	FLOOR	
							FIELD TILES	MOSAICS
Sealing recommended	Optional	Optional	Yes-Required*	Yes-Required*	Yes-Required*	Optional	Optional	Optional
Recommended cleaning	Routine with non-abrasive cleaners							

CHARACTERISTICS	SOLID GLAZE	TRANSLUCENT GLAZE	MATTE CRACKLE	MICRO CRACKLE	CLASSIC CRACKLE	DIMENSIONAL FIELD	FLOOR	
							FIELD TILES	MOSAICS
Glaze	Solid	Solid with subtle movement	Crackle with subtle movement	Crackle with subtle movement	Crackle	Solid	Solid	Solid
Surface Sheen	Glossy	Glossy	Semi-Matte	Glossy	Glossy	Glossy	Semi-Matte	Semi-Matte
Texture	Smooth	Slightly Undulated	Slightly Undulated	Slightly Undulated	Smooth	Smooth	Smooth	Smooth
Color Variation	Slight	Medium	Medium	Medium	Medium	Slight	Slight	Slight

APPLICATION GUIDELINES		SOLID GLAZE	TRANSLUCENT GLAZE	MATTE CRACKLE	MICRO CRACKLE	CLASSIC CRACKLE	DIMENSIONAL FIELD	FLOOR	
								FIELD TILES	MOSAICS
Bathrooms									
Residential	Walls	✓	✓	✓*	✓*	✓*	✓	✓	✓
	Floors							✓	✓
	Countertops	✓	✓					✓	✓
Commercial	Walls	✓	✓	✓*	✓*	✓*	✓	✓	✓
	Floors								
	Countertops								
Showers / Steamrooms									
Residential	Walls	✓	✓	✓*	✓*	✓*	✓	✓	✓
	Floors							✓	✓
Commercial	Walls	✓	✓	✓*	✓*	✓*	✓	✓	✓
	Floors								
Kitchens									
Residential	Walls	✓	✓	✓*	✓*	✓*	✓	✓	✓
	Floors							✓	✓
	Countertops	✓	✓					✓	✓
Commercial	Walls	✓	✓	✓*	✓*	✓*	✓	✓	✓
	Floors								
	Countertops								
Fireplace Surrounds									
Residential	Interior	✓	✓	✓*	✓*	✓*	✓	✓	✓
	Exterior***	✓	✓	✓*	✓*	✓*	✓	✓	✓
Commercial	Interior	✓	✓	✓*	✓*	✓*	✓	✓	✓
	Exterior***	✓	✓	✓*	✓*	✓*	✓	✓	✓
Outdoor Cooking / Bar Spaces									
Residential	Walls	✓	✓	✓*	✓*	✓*	✓	✓	✓
	Countertops							✓	✓
Commercial	Walls	✓	✓	✓*	✓*	✓*	✓	✓	✓
	Countertops							✓	✓
Pool Waterlines / Water Fountains									
Residential	Exterior***	✓	✓				✓**	✓	✓
Commercial	Exterior***	✓	✓				✓**	✓	✓

* Crackle tiles must be properly sealed. (See SEALING instructions in INSTALLATION & MAINTENANCE guidelines)

** This usage excludes the Chrome Diamonds and Metal Dots / *** Non-freeze / thaw climates