

GARDEN STATE TILE

Together We Can Design For Life

ONYX




ONYX

colors

/ WHITE



/ SILVER



/ NOIR



/ WHITE p.6

/COLOR BODY PORCELAIN MADE IN THE USA.

Available in 12"x24", 12"x12",
3"x12" Listello, along with
coordinating bullnose, mosaics,
and cove base options.





/ WHITE

ONYX





12"x12". 12"x24" / **WHITE** Polished



12"x12". 12"x24" / **WHITE** Polished



/ SILVER

ONYX





3"x12". listello / **SILVER** Polished . 12"x12". mosaic / **WHITE** Polished . 12"x24". / **SILVER**



12"x12". 12"x24" / **SILVER** Polished






ALM ACH
MALE ACH
A A N
B L G A
N E V P T
MON E
NAR AB
C A R
LO R L
DE W
CU C U
FRES AT
M A L

ROXANNE LOWIT BACKSTAGE DIOR |
wolterinck's world OUTIN |

12"x12", 12"x24" / **SILVER** Polished

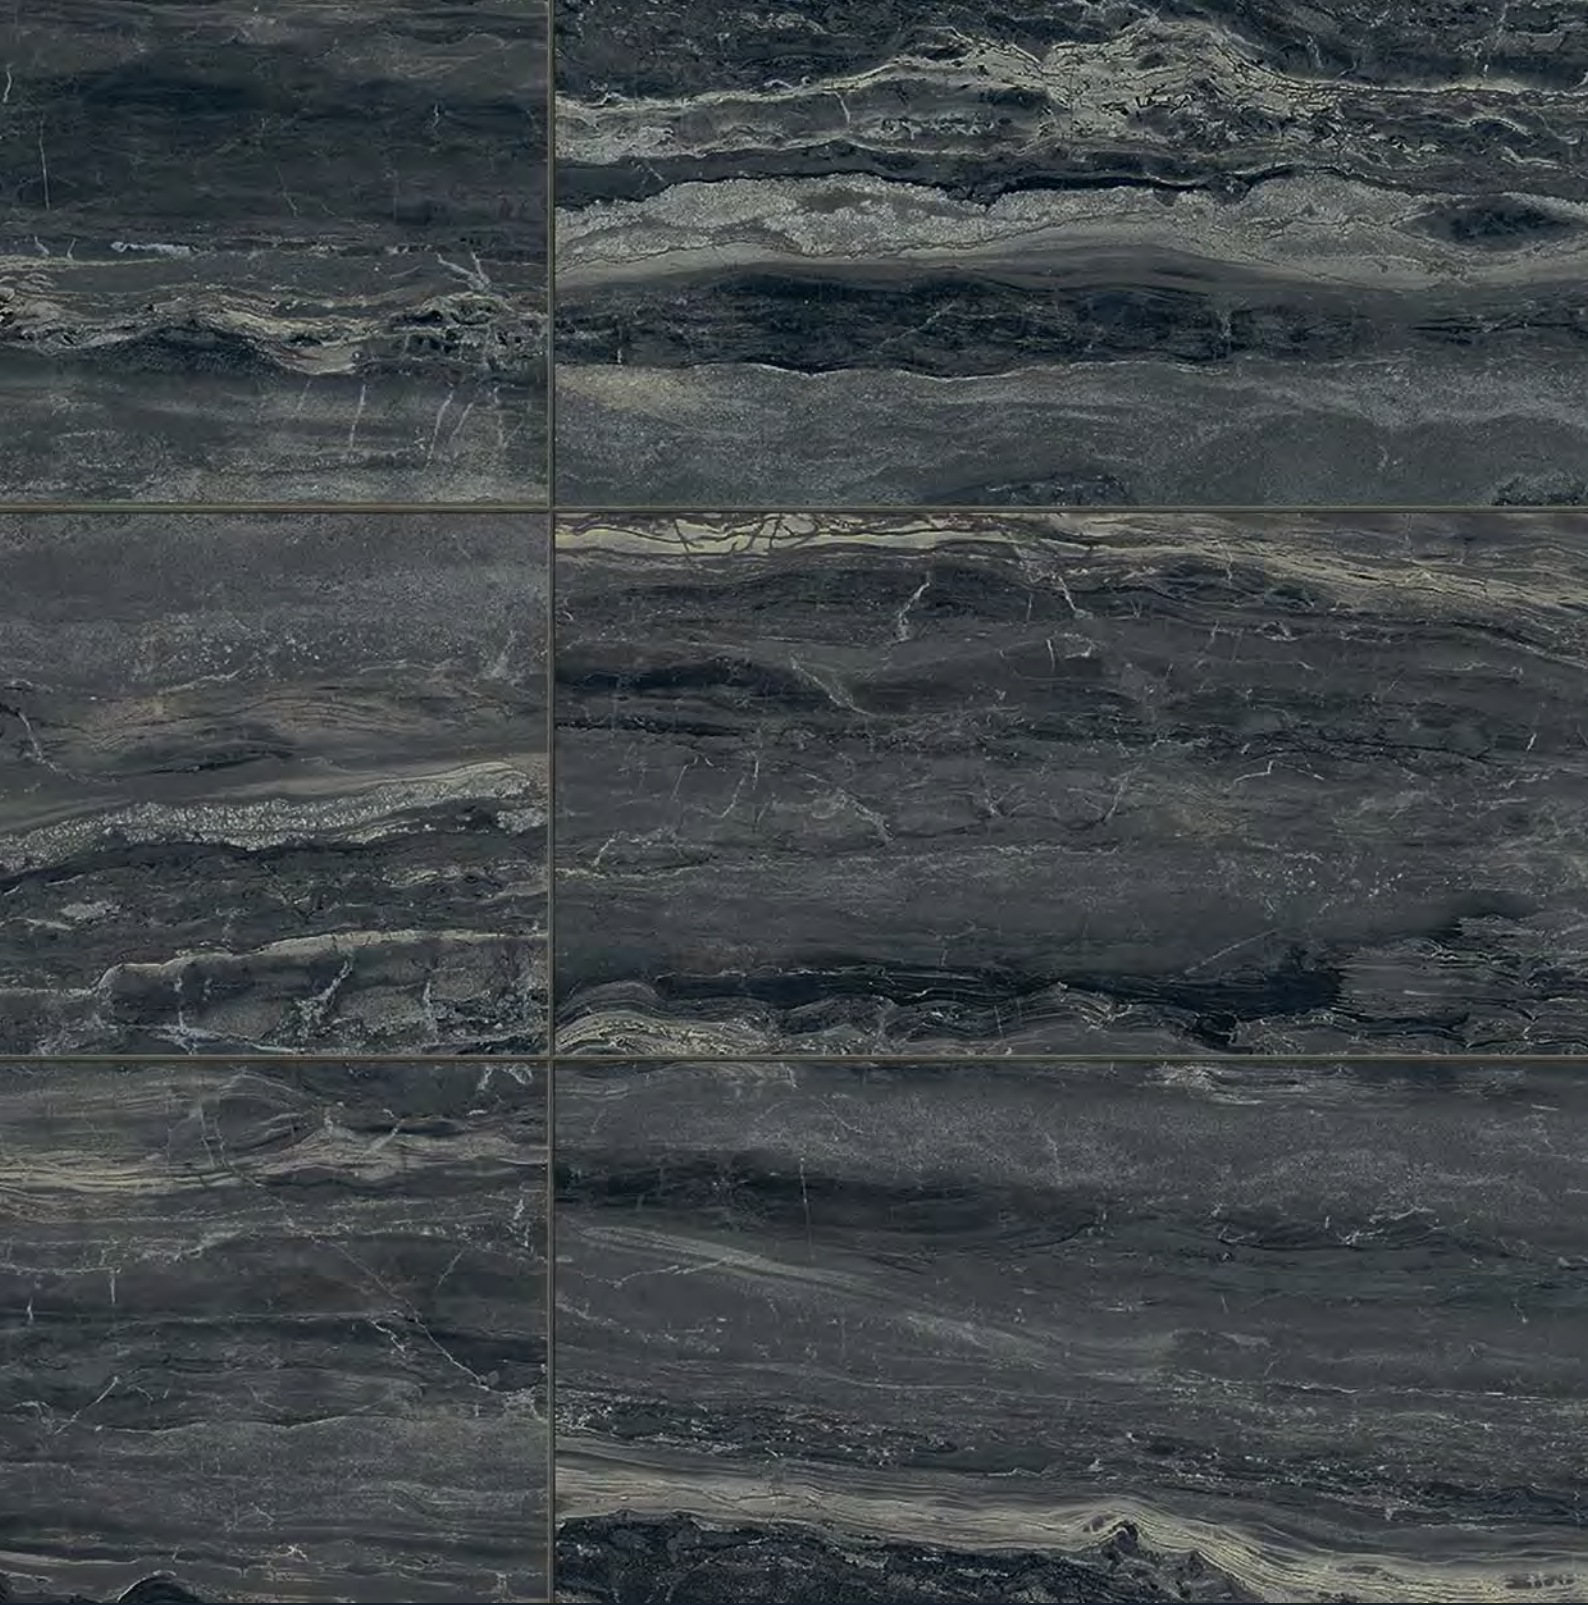

/ NOIR

ONYX







12"x12"/ NOIR



3"x12". listello .12"x24" / **NOIR** Polished



3"x12". listello .12"x24" / **NOIR** Polished

SIZES & SHADE VARIATION

38 |

sizes:

12"x24"
Matte / Rectified



1100533 Noir
1100532 Silver
1100531 White

12"x24"
Polished / Rectified



1100536 Noir
1100535 Silver
1100534 White

12"x12"
Matte / Rectified




1100539 Noir
1100538 Silver
1100537 White

12"x12"
Polished / Rectified



1100542 Noir
1100541 Silver
1100540 White

3"x12"
Listello / Polished




1100560 Noir
1100559 Silver
1100558 White

Colors shown may vary from
actual product.
Final selection should be made
from actual product samples.


mosaics & trim pieces:

12"x12" Mosaic
(36 dot) Matte



1100551 Noir
1100550 Silver
1100549 White

12"x12" Mosaic
(36 dot) Polished



1100554 Noir
1100553 Silver
1100552 White

3"x12" Bullnose
Matte



1100548 Noir
1100547 Silver
1100546 White

3"x12" Bullnose
Polished




1100545 Noir
1100544 Silver
1100543 White

6"x12" Cove Base *special order only
Matte



1100557 Noir
1100556 Silver
1100555 White



V1

UNIFORM APPEARANCE

Differences among pieces from the same production run are minimal.



V2

SLIGHT VARIATION

Clearly distinguishable differences in texture and/or pattern with similar colors.



V3

MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece will vary significantly.



V4








SUBSTANTIAL VARIATION

Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.





technical specifications

		REFERENCE VALUE	DECLARED VALUE	TEST METHOD
	SURFACE ABRASION		V	ASTM C1027
	WATER ABSORPTION	≤0.5%	MEETS REQUIREMENT	ASTM C373
	CHEMICAL RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM 650
	DYNAMIC COEFFICIENT OF FRICTION	≥0.51 WET	MEETS REQUIREMENT	ANSI A137.1
	STAIN RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM C1378
	BREAKING STRENGTH	AS REPORTED	≥400	ASTM C648
	RESISTANCE TO FREEZE	AS REPORTED	RESISTANT	ASTM C1026



RESISTANT FOR THE HOUSE The product is water-resistant: it stops liquids, body oils, acidic and staining substances from penetrating the tiles. It resists scratches, scuffs and gauges better than any other floor covering. It does not absorb fumes, odors or smoke. It doesn't discolor or fade when exposed to sunlight, or other natural elements. It is completely fire proof. It resists burns and doesn't feed a fire. Its high resistance to abrasive dirt and grime makes it suitable even for heavy-traffic areas of the house such as hallways, entrances, foyers and walkways.

FROST RESISTANT Exceeding the ADA standard requirements, the Milestone product can also be used for outside applications. It stands up to abrupt temperature changes and freezing-thaw cycles. When properly installed according to ANSI A137.1. It's strong enough to be used in exterior applications even in frigid climates. Proper consideration must be given to the anti-slip requirements of the area to be tiled.

ANTI-SLIP The testing conducted on our finished product will guarantee that all of our tiles will have an anti-slip surface so they may be used with total confidence in kitchen and bath applications. The Milestone product is perfect for both home and commercial interiors, such as restaurants, offices, retail stores, etc. Its anti-slip properties provide a safe walking surface in both wet and dry conditions, according to the Americans with Disabilities Act.

HYGIENE/SANITATION & EASY CLEANING The Milestone product doesn't absorb odors or bacteria of any kind. It's easy to clean with a damp sponge, mop, or cloth. For a more intense cleaning, simply use a mild solution of water and a common household detergent. Regular cleaning will stop the growth of germs and bacteria in damp areas such as the bathroom.

• DUE TO THE INHERENT NATURE OF FIRED PORCELAIN TILE, IT IS IMPORTANT TO NOTE THAT THE COEFFICIENT OF FRICTION MAY VARY WITHIN AND BETWEEN PRODUCT RUNS.

packaging

SIZES	METRIC (CM)	THICKNESS (MM)	PIECES PER BOX	SQ. FT PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
FIELD TILES								
12"x24" RECTIFIED	30x60	8	6	12	58.8	48	576	2,822
12"x12" RECTIFIED	30x30	8	13	13	53.3	48	624	2,558
3"x12" LISTELLO	7.5x30	8	12	3	13.2	168	2,016 pcs	2,218
MOSAICS AND COORDINATING TRIMS								
12"x12" MOSAIC (36 DOT)	30x30	8	10	10	35	45	450 pcs	1,575
3"x12" BULLNOSE	7.5x30	8	12	3	12.9	168	2,016 pcs	2,167
6"x12" COVE BASE	15x30	8	10	5	17.5	64	640 pcs	1,120

* WEIGHT PER PALLET DOES NOT INCLUDE PALLET WEIGHT ITSELF.

ALL OTHER SIZES WILL BE PACKAGED AS ORDERED.

PLEASE CONTACT MILESTONE CUSTOMER SERVICE AT 1-877-356-7461 FOR PACKAGING INFORMATION.

MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16") IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

Routine care instructions:

1. Wash with water to remove superficial dirt.
2. Application of Fila Cleaner® Fila (commercial product) diluted to an average of 1:200 to the surface.
3. Let the solution sit 5-7 minutes.
4. Remove the cleaner with a vigorous mechanical cleaning action using common hand cleaning equipment, or a suitable floor-cleaning appliance.
5. Dry the floor completely.

Note: For desired results, it is particularly important to combine the effect of the detergent with a vigorous mechanical cleaning action.

The products mentioned in these instructions do not officiate any official agreements with any floor cleaning product producers.

CLEANING & MAINTENANCE



Contributes to LEED credits

CERTIFICATIONS & ACCREDITATIONS

SUGGESTED INSTALLATIONS

PEI Class

V

Heavy traffic

In the presence of scratching dirt, in the most severe conditions to which glazed surfaces can be exposed (entryways, work areas, restaurants, exhibitions, shops, and other environments in public or private buildings, and more)



WHY PORCELAIN?

There are many reasons to choose impervious porcelain tile over other floor coverings. It offers the largest array of design options and holds its value the longest. In a comparison between the many different flooring options, porcelain tile offers one of the most durable and least expensive options over the lifespan of the building.

Benefits of Porcelain Tile

- Impervious to water
- Easy to maintain
- Variety of design options
- Environmentally friendly
- Resistant to germs and bacteria
- Fade resistant
- Fire resistant
- Durable - best long-term value vs. other floor coverings



OUR SHOWROOMS

NEW JERSEY

Dover
Princeton
Roselle Park
Wall
West Berlin

PENNSYLVANIA

Bethlehem
Lancaster
Philadelphia
Warminster

SOUTH CAROLINA

Charleston
Columbia

GEORGIA

Savannah

GARDEN STATE TILE

Together We Can Design For Life

GSTILE.COM    @GARDENSTATETILE