


GARDEN STATE TILE

Together We Can Design For Life

STRIPED & SOLID HEX


STRIPED

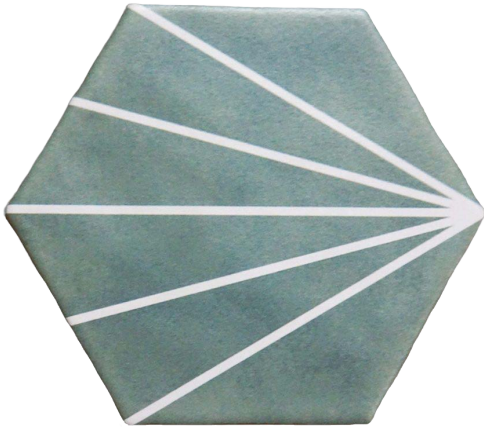


Green




White

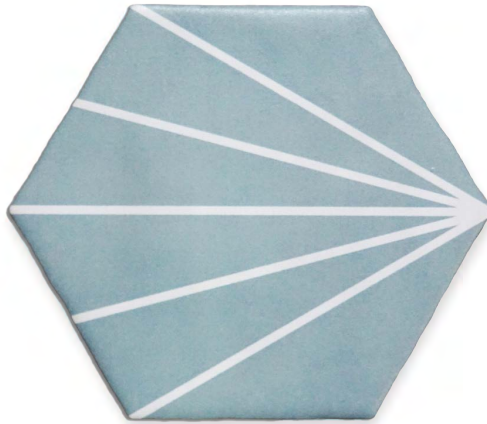


Turquoise

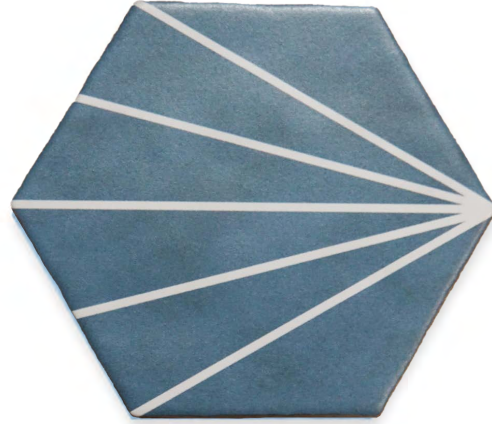


Blue Marine

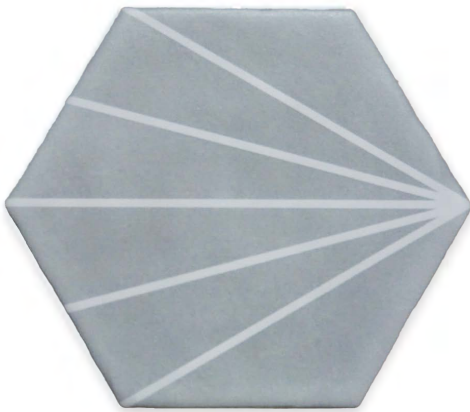

Grey

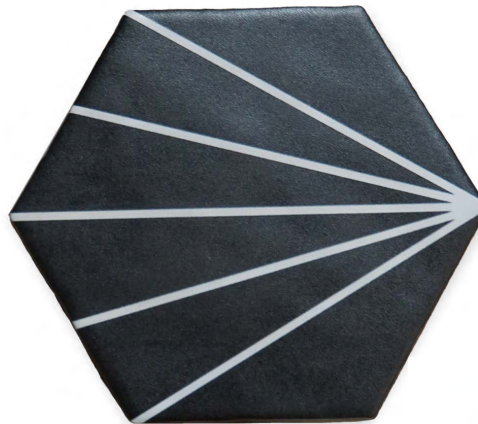

Black

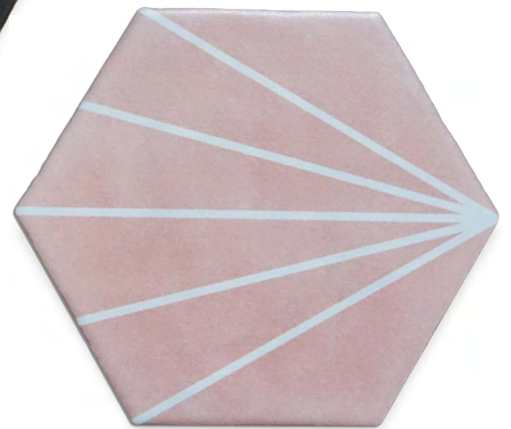

Pink*



*Non-stock

SOLID



Green



White



Turquoise



Blue Marine



Grey



Black





Pink*




*Non-stock

STRIPED HEX PATTERNS

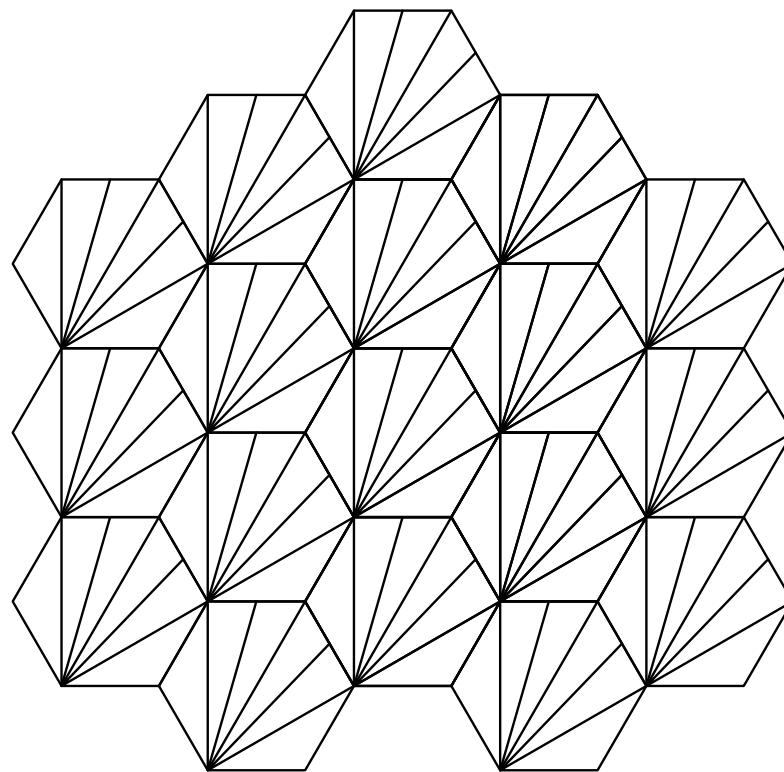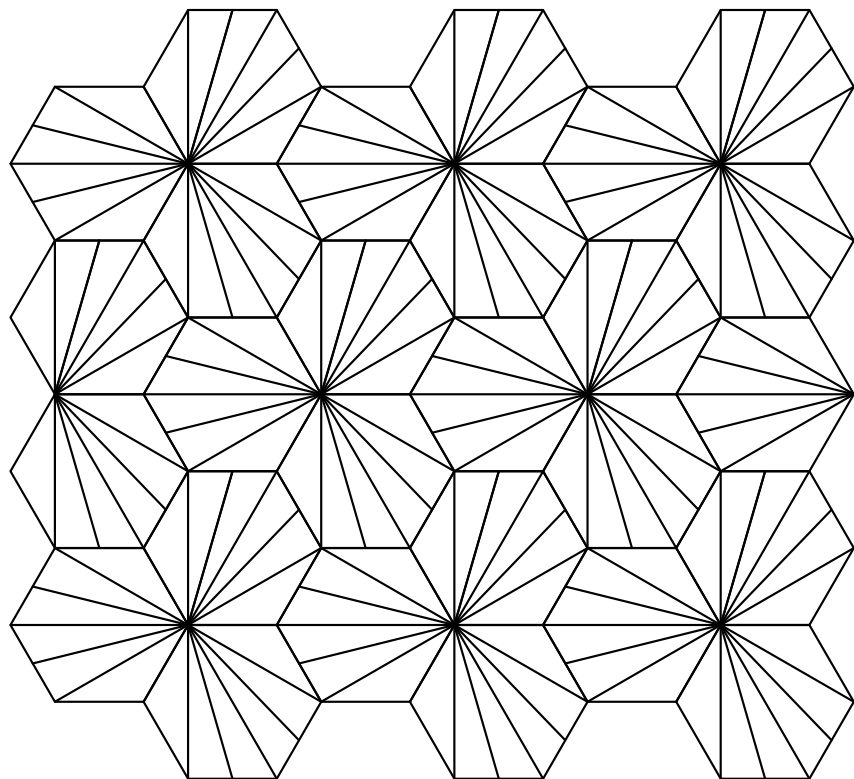

STRIPED & SOLID HEX

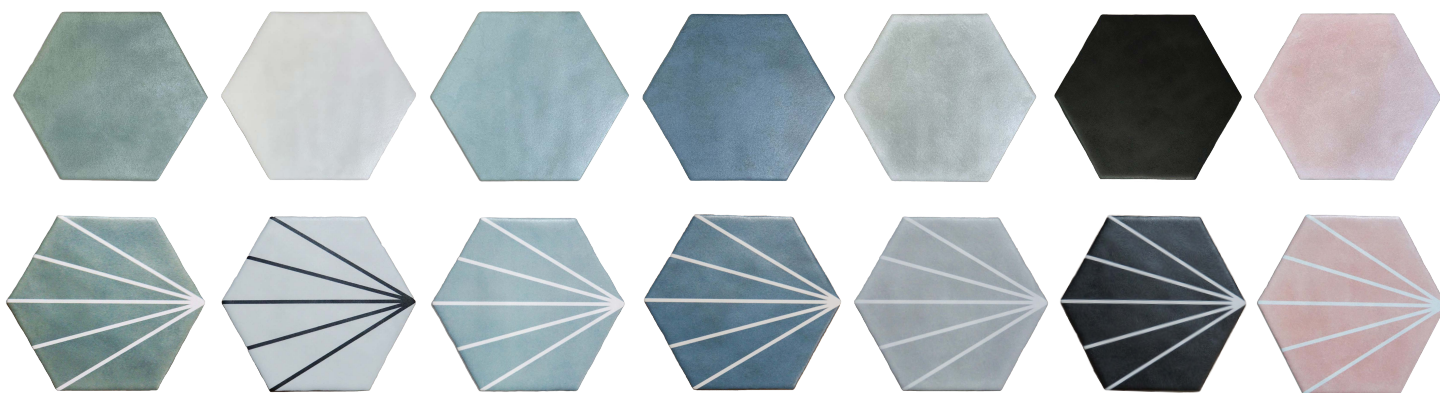

GRUPO B1a ISO 13006 ANEXO G UNE-EN 14411 ANEXO G

SAMPLE: STRIPED & SOLID HEXAGON

SIZE: 5.9"x6.9" | 15X17.5CM

THICKNESS: 10.5MM

APPLICATION: INDOOR & OUTDOOR, FLOOR & WALL

CHARACTERISTICS

SURFACE QUALITY	≥ 95%	EN ISO 10545-2
DIMENSIONS		
CURVATURE	± 0,5 % / ± 2,0 mm	EN ISO 10545-2
THICKNESS	± 5% / ± 0,5 mm	EN ISO 10545-2
FROM WORK SIZE	± 0,6 % / ± 2,0 mm	EN ISO 10545-2
FROM RECTANGULARITY	± 0,5% / ± 2,0 mm	EN ISO 10545-2
FROM STRAIGHTNESS OF SIDES	± 0,5 % / ± 1,5 mm	EN ISO 10545-2
WATER ABSORPTION	E≤0,5%	EN ISO 10545-3
MODULUS OF RUPTURE		
BREAKING STRENGTH	≥1300N	EN ISO 10545-4
MODULUS OF RUPTURE	≥ 35 N/mm ²	EN ISO 10545-4
RESISTANCE TO THERMAL SHOCK	Complies	EN ISO 10545-9
CRAZING RESISTANCE	Complies	EN ISO 10545-11
FROST RESISTANCE	Complies	EN ISO 10545-12
RESISTANCE TO SURFACE ABRASION	Class 4	EN ISO 10545-7
STAIN RESISTANCE	5/5/5	EN ISO 10545-14
CHEMICAL RESISTANCE		
HOUSEHOLD CHEMICALS AND SWIMMING POOL SALTS	GA/GA	EN ISO 10545-13
LOW CONCENTRATION OF ACIDS AND ALKALIS	GLA/GLA/GLA	EN ISO 10545-13
SLIP RESISTANCE(PENDULUM)	Class 2 (USRV 40)	UNE-ENV 12633:2003
ANGLE OF SLIP(INCLINED PLATFORM)	R10	DIN 51130:2014
(DCOF)DYNAMIC COEFFICIENT OF FRICTION	0,90	ANSI A137.1:2017

GARDEN STATE TILE

Together We Can Design For Life



Our Showrooms

NEW JERSEY

Dayton
Dover
Princeton
Roselle Park
Wall
West Berlin

PENNSYLVANIA

Bethlehem
Lancaster
Philadelphia
Warminster

GEORGIA

Savannah

SOUTH CAROLINA

Charleston
Columbia



@GardenStateTile



@GardenStateTile



@GardenStateTile



@GardenStateTile



@GardenStateTile