


### HATCHED

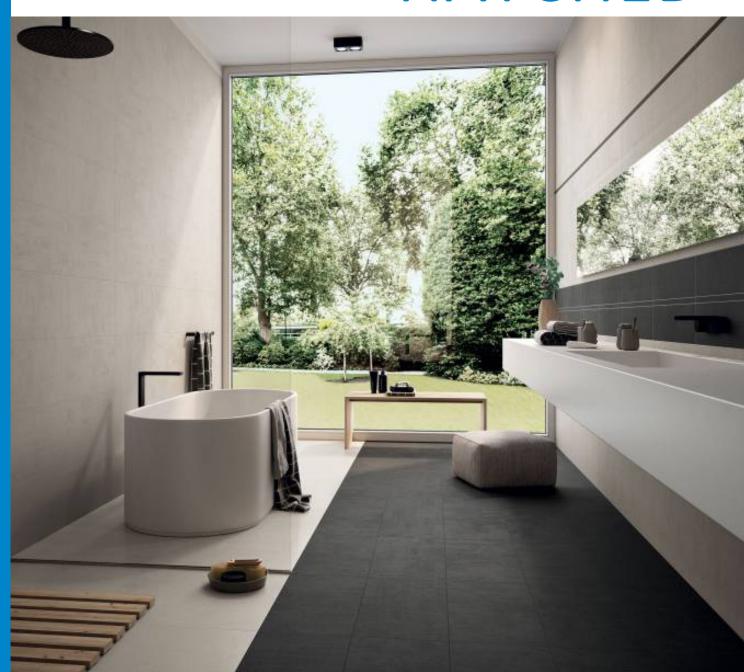


## Trendy Spaces

arefully chosen greys and decorative patterns are juxtaposed adorning the space with richness and elegance. This collection helps to make a unique and recognizable modern style with color combinations and modern decorative elements with a clean and refined look.

### **PROJECT**

FLOOR DESIGN
Grey Merino - 12"x24"
WALL DESIGN
Dark Silk, Grey Merino - 12"x24" FLOOR DISPLAYS
Dark - 12"x24"







PROJECT
FLOOR DESIGN
Grey Merino - 12"x24"
Silver Wool, Dark Silk, Grey Merino, White Cotton - 6"x24" WALL DESIGN
Dark Silk, Grey Merino - 12"x24"
FLOOR DISPLAY
Dark - 12"x24"



## Well-being Style

The staggered layout makes full use of Soul's range of sizes and colors, creating striking surfaces with a fabric effect.

FLOOR DESIGN

Silver Wool - 12"x24" Dark Silk - 12"x24"

# Inside no imension

ateriality and delicacy:
resin-effect
stoneware reveals a contemporary
and expressive personality,
highlighting lines and volumes.
Resin-inspired floors show off a
delicate ceramic surface, in a
perfect contemporary style.

### PROJECT

FLOOR DESIGN

Concrete - 24"x24"

WALL DESIGN

Concrete - 24"x24"

Silver Wool, White Cotton, Grey Merino

12"x24" / 6"x24" / 0.8"x24"






designed also to be combined with ceramic materials with a different look, to confer a modern, refined flavor on rooms thanks to the ability to play with and combine colors.

### PROJECT

FLOOR DESIGN
Concrete - 24"x24"
WALL DESIGN
Concrete - 24"x24"
Silver Wool,
Withe Cotton, Grey Merino
12"x24" / 6"x24"

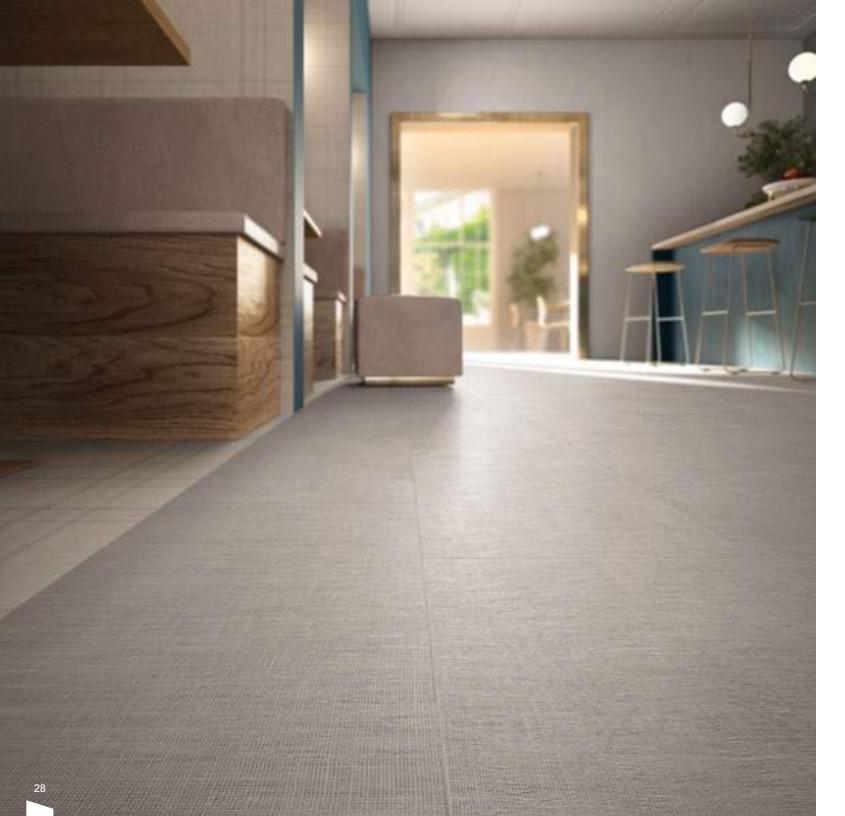

### PROJECT

FLOOR DESIGN Silver Wool - 12"x24" Coffee Cloth, White Cotton - 6"x24" WALL DESIGN

Silver Wool - 12"x24"


Q

surface weave appears soft and warm to touch, giving a look of modern, elegant comfort.



Surprising – Decoration

### **COLOR** MATCHING

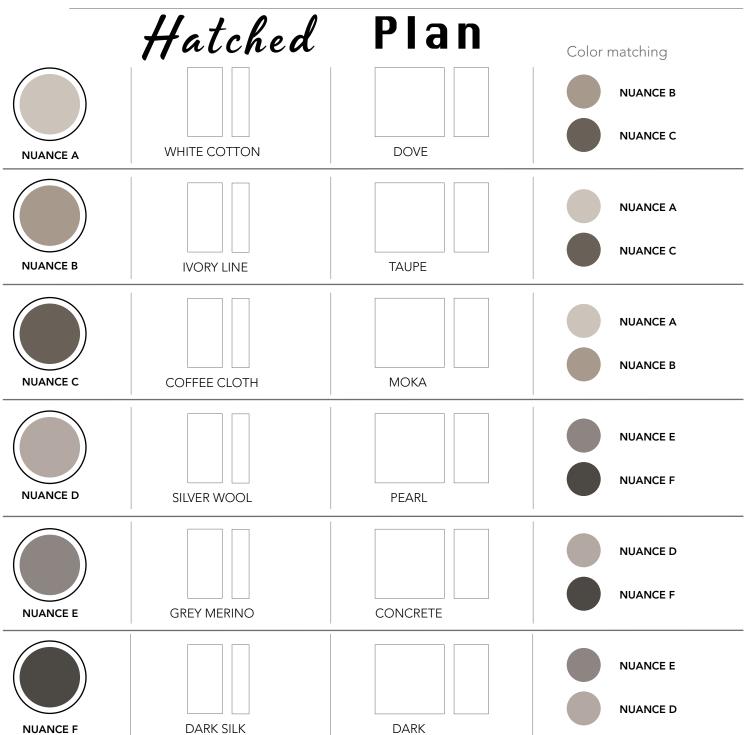






**COLORED BODY PORCELAIN TILE - Rectified Monocaliber** 

MATT FINISH
























### Hatched

**COLORED BODY PORCELAIN TILE - Rectified Monocaliber** 


MATT FINISH

MATT FINISH



your local representative, who will provide you with a sample piece of the requested tile. installation to minimize and blend any possible color difference.

The color of tiles printed in this catalogue may differ from actual tiles. Tile color reproductions in this catalogue are representative only. Slight tone and shade variations are the amount of color as well as the texture of each piece may vary from tile to tile. inherent in porcelain tiles. Before selecting a color, we recommend that you contact Inspect the product immediately upon delivery and select tiles from many boxes during

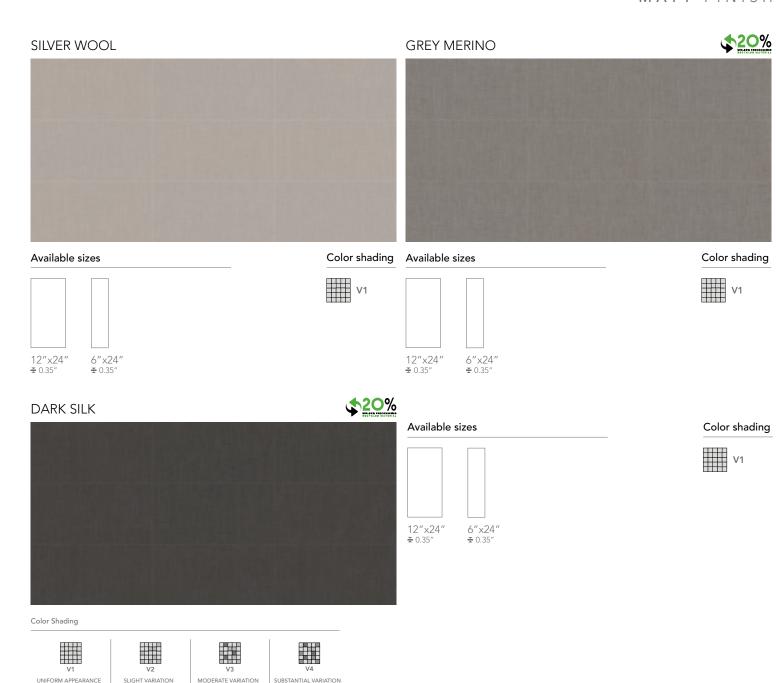

	COVE BASE  BULLNOSE FROM PLAN COLLECTION		
	6"x12"	3"x24"	
WHITE COTTON	•	●PLAN DOVE	
IVORY LINE	•	PLAN TAUPE	
COFFEE CLOTH	•	●PLAN MOKA	
SILVER WOOL	•	PLAN PEARL	
GREY MERINO	•	●PLAN CONCRETE	
DARK SILK	•	•PLAN DARK	

38



### **COLORED BODY PORCELAIN TILE** - Rectified Monocaliber

### **RECOMMENDED USE**

Recommended for indoor floors, walls, countertops, and outdoor walls in commercial and residential application. Not recommended for outdoor application or horizontal exterior surfaces. Landmark recommends an offset no greater than 30%, if a staggered pattern is required for tiles of 20" inches or longer.

### **CARE AND MAINTENANCE**

Do not apply any wax or sealer to the product after installation. Regular cleaning is the best way to keep Soul tiles looking good. Use clean, hot water (add household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots.



PHYSICAL PROPERTIES	TEST ASTM	NORTH AMERICAN STANDARD A137.1*	RESULTS
Water absorption *	C373	≤ 0.5%	COMPLY WITH ANSI A137.1
DCOF Average dynamic coefficient of friction **	BOT 3000 test	≥ 0.42	≥ 0.42
Resistance to freeze/thaw cycling *	C1026	As reported	RESISTANT
Warpage (edge)	C485	Warpage ± 0.4% or ± 0.05 in	COMPLY WITH ANSI A137.1
Warpage (diagonal)	C485	Warpage ± 0.4% or ± 0.07 in	COMPLY WITH ANSI A137.1
Wedging	C502	± 0.25% or ± 0.03 in	COMPLY WITH ANSI A137.1
Chemical resistance	C650	As reported	UNAFFECTED
Breaking strength	C648	250 lbf or greater	COMPLY WITH ANSI A137.1
Thickness	C499	Range: 0.04 in	COMPLY WITH ANSI A137.1

\* Average values referred to our production and related to the matt finish of the product.

\*\* As far as values relating to the matt finish of the product and to tests carried out by certified external laboratories whose results are available upon request at Headoffice, we are willing to check the lot you are interested in purchasing.

- Be sure to use tiles belonging to the same caliber.

- Test results are available on request.















### OUR SHOWROOMS

### **NEW JERSEY**

Dover

Princeton

Roselle Park

Wall

West Berlin

### **PENNSYLVANIA**

Bethlehem

Lancaster

Philadelphia

Warminster

### **SOUTH CAROLINA**

Charleston

Columbia

### **GEORGIA**

Savannah









