


# ARDOSIA

## TECHNICAL INFORMATION & PLUS

### FORMATI - SIZES




**RETTIFICATO**  $80 \times 80$  /  $32'' \times 32''$     
**RETTIFICATO**  $60 \times 120$  /  $24'' \times 48''$     
**RETTIFICATO | GRIP**  $60 \times 60$  /  $24'' \times 24''$     
**RETTIFICATO**  $30 \times 60$  /  $12'' \times 24''$     
**RETTIFICATO**  $7,4 \times 30$  /  $3'' \times 12''$

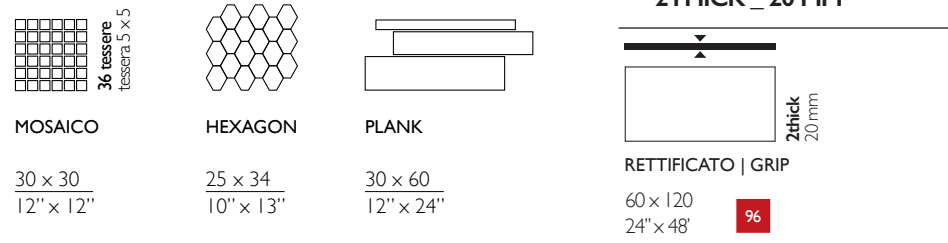

**MOSAICO**  $36 \text{ tessere tessera } 5 \times 5$  /  $30 \times 30$  /  $12'' \times 12''$     
**HEXAGON**  $25 \times 34$  /  $10'' \times 13''$     
**PLANK**  $30 \times 60$  /  $12'' \times 24''$     
**2THICK\_20 MM**  $60 \times 120$  /  $24'' \times 48''$

for all informations concerning special pcs, laying solutions and technical features please refers to the 2thick catalogue

### PEZZI SPECIALI - SPECIAL ITEMS

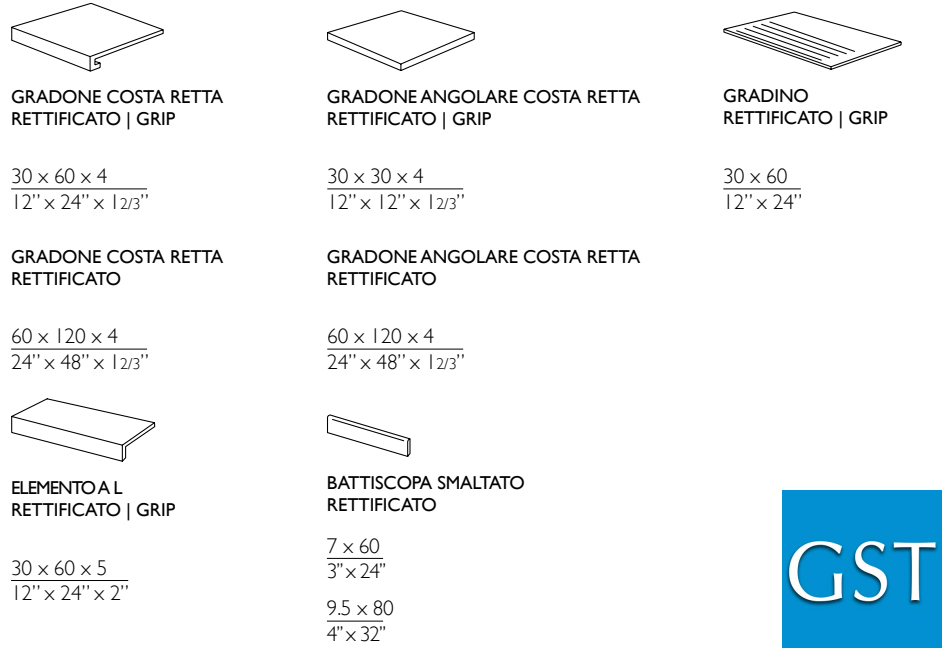

**GRADONE COSTA RETTA RETTIFICATO | GRIP**  $30 \times 60 \times 4$  /  $12'' \times 24'' \times 1\frac{2}{3}''$     
**GRADONE ANGOLARE COSTA RETTA RETTIFICATO | GRIP**  $30 \times 30 \times 4$  /  $12'' \times 12'' \times 1\frac{2}{3}''$     
**GRADINO RETTIFICATO | GRIP**  $30 \times 60$  /  $12'' \times 24''$

**GRADONE COSTA RETTA RETTIFICATO**  $60 \times 120 \times 4$  /  $24'' \times 48'' \times 1\frac{2}{3}''$     
**GRADONE ANGOLARE COSTA RETTA RETTIFICATO**  $60 \times 120 \times 4$  /  $24'' \times 48'' \times 1\frac{2}{3}''$

**ELEMENTO A L RETTIFICATO | GRIP**  $30 \times 60 \times 5$  /  $12'' \times 24'' \times 2''$     
**BATTISCOPIA SMALTATO RETTIFICATO**  $7 \times 60$  /  $3'' \times 24''$     
 $9,5 \times 80$  /  $4'' \times 32''$



### TECHNICAL FEATURES

standards	characteristics or properties	declared values
ISO 10545-3	water absorption	<0.5%
ISO 10545-4	breaking strength	35 N/mm <sup>2</sup>
ISO 10545-13	resistance to acid	GLA
ISO 10545-12	frost resistance	resiste frost proof
ISO 10545-14	stain resistance	4
ISO 10545-2	surface flatness	±0.5%
	thickness	10 mm
DIN51097 DIN51130 DCOF BOT 3000	static coefficient of friction	A R10 > 0.42
DIN51097 DIN51130 DCOF BOT 3000	static coefficient of friction	A+B+C R11 > 0.42
	color shade variations	V3 variazione moderata V3 moderate variation

### PACKING

mm	inch		spessore thickness	pezzi/sc pcs/box	mq/sc sqm/box	kg/sc kgs/box	sc/pl box/pal	mq/pl sqm/pal	kg/pl kgs/pal
60x120	24"x48"	2thick_20mm rectified	20	1	.72	32.25	30	21.60	967.50
60x120	24"x48"	rettificat	10	2	1.44	32.51	30	43.20	975.30
60x60	24"x24"	rettificato   grip	10	3	1.08	23.92	40	43.20	956.80
30x60	12"x24"	rettificat	10	6	1.08	23.76	40	43.20	950.40
80x80	32"x32"	rettificat	10	2	1.28	28.50	40	51.20	1140.00
7.4x30	3"x12"	rettificat	10	40	0.89	19.50	60	53.28	1170.00
30x30	12"x12"	mosaico		11	0.99	20.00	36	35.64	720.00
30x60	12"x24"	plank		5		19.65			
25x34	10"x13"	hexagon		6		11.10			
7x60	3"x24"	battiscopa smaltato rettificat		12		11.16			
9.5x80	4"x32"	battiscopa smaltato rettificat		8		14.24			
30x60	12"x24"	gradino rettificato   g ip		8		31.60			
30x60x4	12"x24"x 23/4"	gradone costa retta rettificato   g ip		4		19.40			
60x120x4	24"x48"x 23/4"	gradone costa retta rettificat		2		34.80			
30x30x4	12"x12"x 23/4"	gradone angolare costa retta   grip		2		4.40			
60x120x4	24"x48"x 23/4"	gradone angolare costa retta		1		18.20			
30x60x5	12"x24"x 2"	elemento a L   grip		4		17.20			

the indicated weight includes the supporting pallet -

### JOINT

for rectified material, we recommend a minimum of 2 mm of grout when using one size of piece only and 3 mm for multi-size laying solutions