GARDEN STATE TILE

Together We Can Design For Life

COUNTRYSIDE

COUNTRYSIDE

COUNTRYSIDE HAS THE STRIKING AND PRESENT NEO-INDUSTRIAL CEMENT-LOOK, COMBINED WITH A RURAL NATURAL STONE EXPRESSION. A MODERN REINTERPRETATION OF A RUSTIC STONE FLOOR – WITH A TWIST, COUNTRYSIDE IS AVAILABLE IN FOUR NATURAL COLORS TO PRESERVE THE ORGANIC-NESS OF DESIGN

WHITE

GST

12"x24"

12"x24"

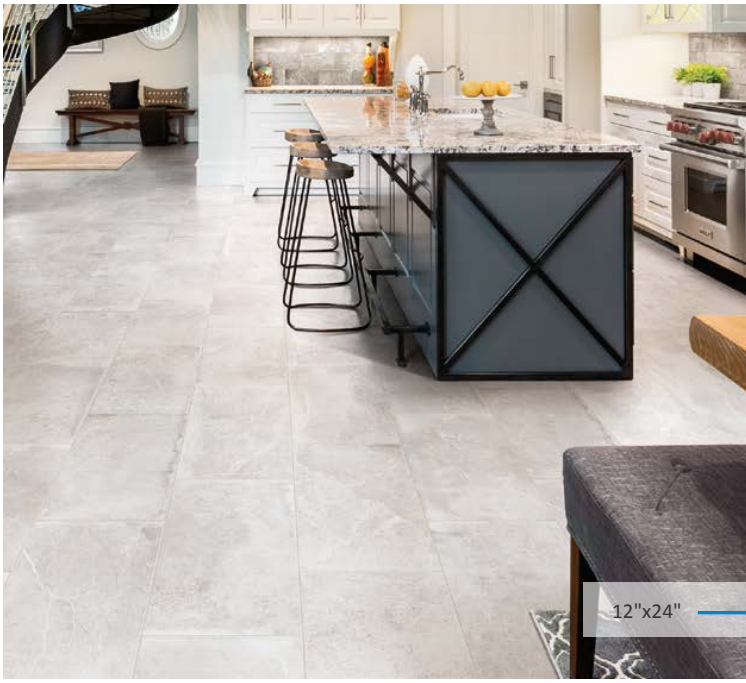

12"x24"

WHITE

12"x24" Matte Pressed

12"x12" Matte Pressed

6"x12" Matte Pressed

2"x2" Mosaic Matte

TAUPE

12"x12"

12"x12"

6"x12"

TAUPE

12"x24" Matte Pressed

12"x12" Matte Pressed

6"x12" Matte Pressed

2"x2" Mosaic Matte

GREY

GST

12"x24"

12"x24"

GREY

12"x24" Matte Pressed

12"x12" Matte Pressed

6"x12" Matte Pressed

2"x2" Mosaic Matte

CHARCOAL

CHARCOAL

12"x24" Matte Pressed

12"x12" Matte Pressed

6"x12" Matte Pressed

2"x2" Mosaic Matte

SIZES & SHADE VARIATION

FIELD TILES



12"X12" MATTE PRESSED
8MM

- WHITE
- TAUPE
- GREY
- CHARCOAL

6"X12" MATTE PRESSED
8MM

- WHITE
- TAUPE
- GREY
- CHARCOAL

12"x24" MATTE PRESSED
8MM

- WHITE
- TAUPE
- GREY
- CHARCOAL

MOSAICS & TRIM



2"x2" MOSAIC
(12"x12" SHEET)
8MM

- WHITE
- TAUPE
- GREY
- CHARCOAL

3"x12" BULLNOSE
8MM

- WHITE
- TAUPE
- GREY
- CHARCOAL

SHADE VARIATION

V3
Moderate Variation

TECHNICAL SPECIFICATIONS

GST

	REFERENCE VALUE	DECLARED VALUE	TEST METHOD
SURFACE ABRASION		IV	ASTM C1027
WATER ABSORPTION	≤0.5%	MEETS REQUIREMENT	ASTM C373
CHEMICAL RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM 650
DYNAMIC COEFFICIENT OF FRICTION	≥0.42 WET	MEETS REQUIREMENT	ANSI A137.1
STAIN RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM C1378
BREAKING STRENGTH	AS REPORTED	≥400	ASTM C648
RESISTANCE TO FREEZE	AS REPORTED	RESISTANT	ASTM C1026

• DUE TO THE INHERENT NATURE OF FIRED PORCELAIN TILE, IT IS IMPORTANT TO NOTE THAT THE COEFFICENT OF FRICTION MAY VARY WITHIN AND BETWEEN PRODUCT RUNS.

RESISTANT FOR THE HOUSE The product is water-resistant: it stops liquids, body oils, acidic and staining substances from penetrating the tiles. It resists scratches, scuffs and gauges better than any other floor covering. It does not absorb fumes, odors or smoke. It doesnt discolor or fade when exposed to sunlight, or other natural elements. It is completely fire proof. It resists burns and doesn's feed a fire. Its high resistance to abrasive dirt and grime makes it suitable even for heavy-traffic areas of the house such as hallways, entrances, foyers and walkways.

FROST RESISTANT Exceeding the ADA standard requirements, the **Garden State Tile** product can also be used for outside applications. It stands up to abrupt temperature changes and freezing-thaw cycles. When properly installed according to ANSI A137.1. It's strong enough to be used in exterior applications even in frigid climates. Proper consideration must be given to the anti-slip requirements of the area to be tiled. **ANTI-SLIP** The testing conducted on our finished product will guarantee that all of our tiles will have an anti-slip surface so they may be used with total confidence in kitchen and bath applications. The **Garden State Tile** product is perfect for both home and commercial interiors, such as restaurants, offices, retail stores, etc. Its anti-slip properties provide a safe walking surface in both wet and dry conditions, according to the Americans with Disabilities Act.

HYGIENE/SANATATION & EASY CLEANING The **Garden State Tile** product doesn't absorb odors or bacteria of any kind. It's easy to clean with a damp sponge, mop, or cloth. For a more intense cleaning, simply use a mild solution of water and a common household detergent. Regular cleaning will stop the growth of germs and bacteria in damp areas such as the bathroom.

PACKAGING

SIZES	METRIC (CM)	THICKNESS (MM)	PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
FIELD TILES								
12"x24" PRESSED	30x60	8 mm	8	16 SF	54.4	48	768 SF	2,611
12"x12" PRESSED	30x30	8 mm	16	16 SF	54.4	48	768 SF	2,611
6"x12" PRESSED	15x30	8 mm	25	12.5 SF	42.5	64	800 SF	2,720
MOSAICS AND COORDINATING TRIMS								
3"x12" BULLNOSE	7.5x30	8 mm	15	15 PCS	14.55	168	2,520 PCS	2,444
12"x12" MOSAIC (2"x2" . 36 DOT)	30x30	8 mm	10	10 PCS	33	45	450 PCS	1,485

* WEIGHT PER PALLET DOES NOT INCLUDE PALLET WEIGHT ITSELF.
ALL OTHER SIZES WILL BE PACKAGED AS ORDERED.

MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16") IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

CERTIFICATIONS AND ACCREDITATIONS

Contributes to LEED credits

GST

OUR SHOWROOMS

NEW JERSEY

Dover
Princeton
Roselle Park
Wall
West Berlin

PENNSYLVANIA

Bethlehem
Lancaster
Philadelphia
Warminster

SOUTH CAROLINA

Charleston
Columbia

GEORGIA

Savannah

GARDEN STATE TILE

Together We Can Design For Life

GSTILE.COM @GARDENSTATETILE