Owen Stone

Porcelain Stone®

CROSSVILLE®

Owen Stone

Porcelain Stone®

Nature – and humanity's affinity for it – influences design in every space.

From color to texture, natural finishes and those inspired by the outdoors bring both solace and sophistication to our interiors. Owen Stone by Crossville takes its cues from the elegance of Italian Pietra di Cardosa and the United State's Vermont Slate and merges those qualities with technical advancements to create a porcelain tile unlike any before. You will notice the difference in Owen Stone when you first touch it. The Leathered finish offers a buttery, cashmere-like feel unique to Crossville – a first for porcelain tile. Smooth, silky, and soft to the touch, this finish is perfect for bare-feet floors and luxurious wall finishes, yet features a DCOF suitable for commercial applications. Our Leathered finish creates a subtle, glowing sheen with a distinct, satiny visual depth. Subtle, minimalist veining resists high traffic and the elements indoors and out, thanks to an additional textured exterior finish offered in the line. As big as the great outdoors, our soft-to-the-touch, slate-inspired porcelain tile features domestically manufactured, impressive 24"x48" tiles, as well as traditional 12"x24" and 24"x24" offerings. All are rectified for high-end installations indoors and out. For demanding exterior applications, our textured (EXT) finish tiles have an average minimum 0.60 DCOF and come in 12"x24" and 24"x24". Rounding out the offering are 2 mosaics, bullnose, and covebase. This impressive trim package provides a large range of application feasibility – from durable commercial installations to gorgeous residential interiors. Feel the difference of Owen Stone by asking for a sample today or ordering online at CrossvilleInc.com

G2 GREEN SQUARED CERTIFIED

VERIFIED BY SCS Global Services

Floor: **OST03** ▸ Slipper 24 x 48 LTR

Floor: **OST02** ▸ Bunny 24 x 24 LTR and 2 x 2 Mosaic Border
Wall: **OST02** ▸ Bunny 24 x 48 LTR
Stall Walls: Ossido Nero L7032 5.6
Countertop: Slabs Black Tie Polished PC009

Color Palette

Available Colors

OST01 ▸ Down LTR/EXT

OST02 ▸ Bunny LTR/EXT

OST03 ▸ Slipper LTR/EXT

OST04 ▸ Mittens LTR/EXT

OST05 ▸ Sable LTR/EXT

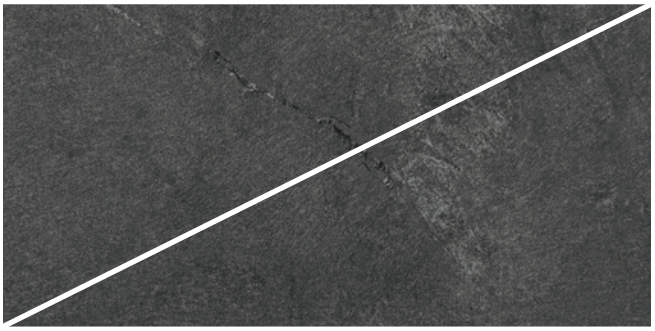

OST06 ▸ Teddy LTR/EXT

Available Finishes

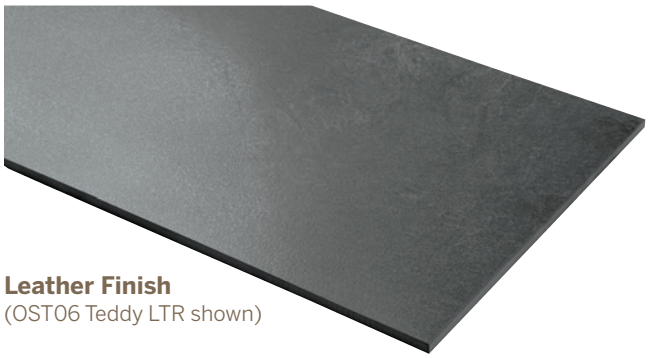

Leather Finish
(OST06 Teddy LTR shown)

Exterior Finish
(OST06 Teddy EXT shown)

Available Mosaics

OST01.10202LMOS
Down 2 x 2 Mosaic

OST03.10202LMOS
Slipper 2 x 2 Mosaic

OST05.10202LMOS
Sable 2 x 2 Mosaic

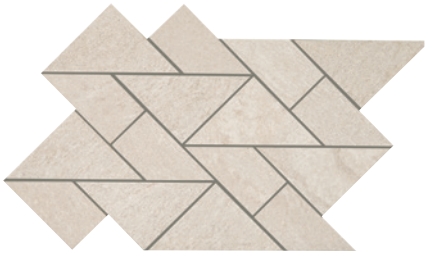

OST01.1CRSLMOS
Down Crossville Mosaic†

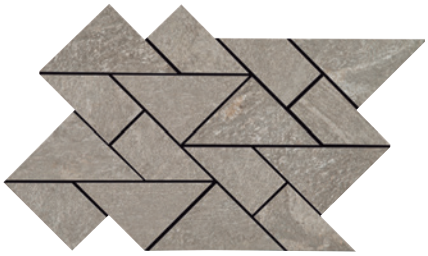

OST03.1CRSLMOS
Slipper Crossville Mosaic†

OST05.1CRSLMOS
Sable Crossville Mosaic†

OST02.10202LMOS
Bunny 2 x 2 Mosaic

OST04.10202LMOS
Mittens 2 x 2 Mosaic



OST06.10202LMOS
Teddy 2 x 2 Mosaic

OST02.1CRSLMOS
Bunny Crossville Mosaic†

OST04.1CRSLMOS
Mittens Crossville Mosaic†

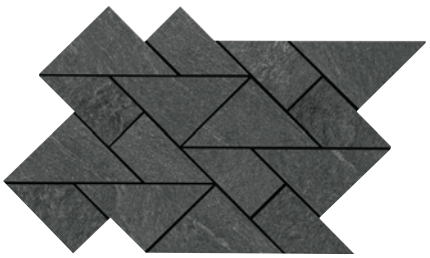

OST06.1CRSLMOS
Teddy Crossville Mosaic†

† Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.

OST05 ▸ Sable 12 x 24 LTR

Floor: **OST04** ▸ Mittens 24 x 24 LTR

Floor: **OST01** ▸ Down 24 x 24 EXT
Wall: **OST01** ▸ Down Crossville Mosaic

Floor: **OST06** ▸ Teddy 24 x 48 LTR

Specifications

Sizes *(Shown in OST06 Teddy)*

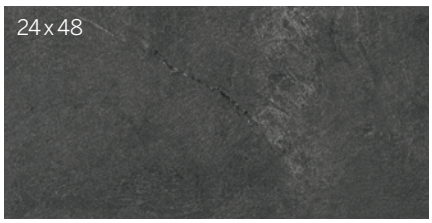

Crossville Mosaic†
(Mounted on a
217 x 372 mm sheet)



2 x 2 Mosaic
(Mounted on a
298 x 298 mm sheet)

†Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.

Get Planked!

Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment.

See website for more details and sizes.

Sizes & Finishes

Field Tile - Rectified

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
12 x 24	297 x 597	9.5	3	LTR/EXT*
24 x 24	597 x 597	9.5	3	LTR/EXT
24 x 48	597 x 1197	10.5	3	LTR

Note: Field tile is rectified with a minimum 3mm grout joint
* Extended lead time on 12 x 24 EXT finish.

Mosaics

Available in all colors

Nominal (in)	Actual Size (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Mosaic**	298 x 298	9.5	3	LTR
Crossville Mosaic†	217 x 372	9.5	2	LTR

**Mounted on 12 x 12 sheet with 3mm grout joints

† Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.

Coordinating Trim

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 12 Cove Base	150 x 297	9.5	3	UPS
4 x 24 Single Bullnose	96 x 597	9.5	3	LTR

6 x 12
Cove Base

4 x 24 Bullnose

Product Performance

Breaking Strength	>450 lbf	ASTM C648
Bond Strength	>200 psi	ASTM C482
Chemical Resistance	Unaffected	ASTM C650
Frost Resistance	Resistant	ASTM C1026
Water Absorption	<0.20%	ASTM C373
Scratch Hardness	7	Mohs Scale

Wet Dynamic Coefficient of Friction Range

LTR (Leather)	0.42 - 0.52	AcuTest℠
EXT (Textured)	0.60 - 0.70	AcuTest℠

Shade & Texture Index

Owen Stone has a shade variation of V3.

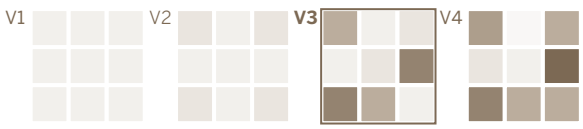

V1 Uniform appearance
V2 Slight Variation
V3 Moderate Variation
V4 Substantial Variation

This porcelain tile product is produced with a V3 variation. While the colors and/or textures present on a single piece of tile will be indicative of the colors and/or textures to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.

Recommended Use

Owen Stone LTR is recommended for interior floors, walls, counter tops and exterior walls in both residential and commercial applications. Owen Stone EXT is recommended for exterior floors and walls in both residential and commercial applications. **If offset pattern is required for tiles 15 inches or longer, Crossville® recommends an offset of not greater than 33%.** See CrossvilleInc.com for detailed installation instructions.

Leather Finish (LTR)

Crossville® Leathered finish creates a subtle glow, visual depth, and a smooth feel. The finish is achieved by running diamond-tipped brushes over the surface of fired porcelain tile, resulting in an incredibly soft feel and tremendous visual richness. While our Leathered finish may be soft to the touch, the DCOF remains high, making it suitable for residential and commercial interior floor and wall applications and exterior vertical surfaces.

Wet area use for Owen Stone Mosaics

Crossville® produces the Owen Stone 2 x 2 and Crossville mosaics with the Leather (LTR) finish. The AcuTest℠ wet Dynamic COF of Owen Stone is ≥0.42. Their small sizes ensure frequent grout joints which provides traction and drainage.Crossville cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water and poor surface cleaning.

This information is provided so that customers may make a realistic and informed decision when comparing Owen Stone to other tile products in wet area environments, such as residential/ commercial bathrooms, showers, and interior pool decks.

Care and Maintenance

Regular cleaning is the best way to keep Owen Stone tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. No waxes or sealers are needed. More information regarding the care and maintenance of Crossville products is available at CrossvilleInc.com.

Our Warranty

Crossville Inc guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1-2012 and in the performance data section of the Crossville, Inc. general product catalog. For complete details check our website at CrossvilleInc.com.

Hydrotect

Our porcelain tiles are available with Hydrotect. Crossville's revolutionary invisible coating harnesses the power of light, water, and oxygen to create the best defense against dirt and pollution. Whether indoors or out, floors and walls stay cleaner, providing a superior experience in any space. Please request a sample before ordering. For complete details check our website at CrossvilleInc.com.

HYDROTECT™ by CROSSVILLE

Crossville® Sample Express

Visit the website to learn more:
CrossvilleInc.com/Products/ Owen-Stone

Loose Samples for Architects & Designers

Loose Tile Samples
Sizes may vary depending on product series
Max. of 4 large field tile per order

Replacement Chips for PSS Rack
Max. of 5, 2 x 2 chips per color

Standard Shipping
UPS Ground

National Accounts

For over 20 years we have been offering Porcelain tile to commercial customers at National Accounts pricing programs with special discounts. The National Accounts department provides materials forecasting, sales support and samples.

Exterior Cladding

Crossville's Porcelain Stone® Exterior Cladding Systems are suitable for virtually any conventional masonry application. When used in conjunction with our exterior cladding systems, Crossville's Porcelain Stone offers clear advantages: decreased construction costs, less site disturbance, low-to-zero maintenance after installation, accelerated construction schedules and greater strength than traditional masonry.

Our Warranty

Crossville Inc. guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1-2012 and in the performance data section of the Crossville, Inc. general product catalog. For complete details check our website at CrossvilleInc.com.

Information listed here is subject to change. Please refer to CrossvilleInc.com for the latest, most accurate information.

Trade Organizations

Environmentally Aware

Owen Stone

Crossville, Inc.
PO Box 1168
Crossville, TN
38557

Phone 931.484.2110
Fax 931.456.2956
E-Mail Crossc@CrossvilleInc.com
Web CrossvilleInc.com

Above:
Floor: **OST01** ▸ Down 24 x 24 EXT
Wall: **OST01** ▸ Down Crossville Mosaic
On the cover:
Floor : **OST05** ▸ Sable 12 x 24 LTR
Wall: **OST05** ▸ Sable 12 x 24 LTR
Wall Behind theTub: **OST03** ▸ Slipper Crossville Mosaic

CROSSVILLE®