

Owen Stone™

Porcelain Stone®



Owen Stone™

Porcelain Stone®

Nature—and humanity's affinity for it—influences design in every space

From color to texture, natural finishes and those inspired by the outdoors bring both solace and sophistication to our interiors.

Owen Stone™ by Crossville® takes its cues from the elegance of Italian Pietra di Cardosa and Vermont slate, merging these influences with advanced porcelain technology to create a surface that balances beauty, performance, and touch.

Originally introduced with the industry's first-ever **Leather (LTR) finish**, Owen Stone offers a distinctive tactile experience: buttery-smooth with a soft, cashmere-like feel unique to Crossville. Smooth and silky underfoot, it's ideal for barefoot floors and luxurious wall applications, yet still achieves a DCOF suitable for commercial use. The Leather surface also creates a subtle, glowing sheen and a satiny depth that elevates any environment.

Now, the collection expands with the addition of a **refined Unpolished (UPS) finish**—designed for greater versatility in both commercial and residential settings. This grounded, matte surface, available in 12"x24" and 24"x48" delivers an organic aesthetic with everyday practicality, offering designers more ways to bring the look of Owen Stone to life. With an unpolished bullnose and 2"x2" mosaic, this finish offers even more design flexibility for refined edges and coordinated surfaces in both floors and walls.

Subtle, minimalist veining resists wear in high-traffic areas and holds up to the elements, indoors and out. For exterior installations, the **textured Exterior (EXT) finish** offers an average minimum DCOF of 0.60 and is available in 12"x24" and 24"x48".

As big as the great outdoors, Owen Stone's slate-inspired style comes in domestically manufactured 24"x48", 24"x24", and 12"x24" formats—all rectified for precision installation. Complementing the field tiles are two coordinating mosaics, as well as bullnose and cove base trim pieces, making this collection suitable for everything from sophisticated interiors to demanding commercial environments.

Feel the difference of Owen Stone by requesting a sample today or ordering online at [Crossville.com](https://www.crossville.com).



Floor: **OST03** ▶ Slipper 24 x 48 UPS



Floor: **OST02** ▶ Bunny 24 x 24 LTR and 2 x 2 Mosaic Border
Wall: **OST02** ▶ Bunny 24 x 48 LTR
Stall Walls: Ossido Nero L7032 5.6
Countertop: Slabs Black Tie Polished PC009

Color Palette

Available Colors



OST01 ▶ Down



OST02 ▶ Bunny




OST03 ▶ Slipper



OST04 ▶ Mittens




OST05 ▶ Sable

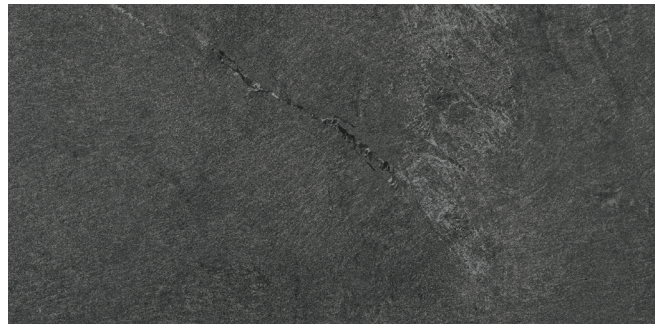

OST06 ▶ Teddy

Unique Finishes - Leather and Exterior finish shown below. UPS finish also available.

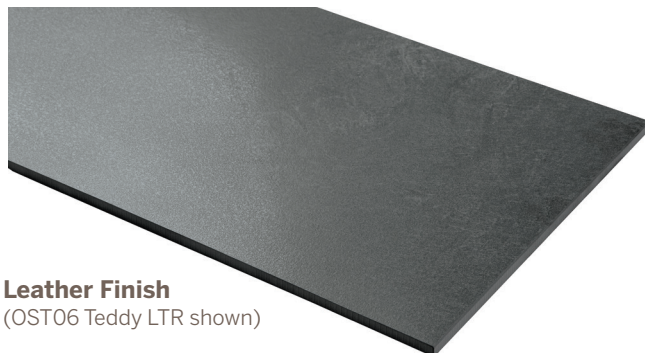

Leather Finish
(OST06 Teddy LTR shown)



Exterior Finish
(OST06 Teddy EXT shown)

Available Mosaics




OST01.10202LMOS
OST01.10202UMOS ▶
Down 2 x 2 Mosaic



OST03.10202LMOS
OST03.10202UMOS ▶
Slipper 2 x 2 Mosaic



OST05.10202LMOS
OST05.10202UMOS ▶
Sable 2 x 2 Mosaic

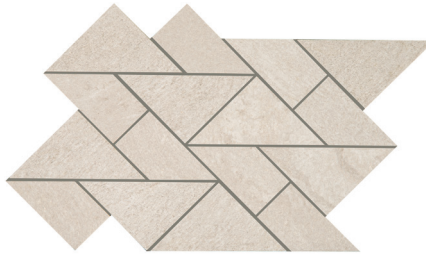

OST01.1CRSLMOS ▶
Down Crossville Mosaic†



OST03.1CRSLMOS ▶
Slipper Crossville Mosaic†




OST05.1CRSLMOS ▶
Sable Crossville Mosaic†



OST02.10202LMOS
OST02.10202UMOS ▶
Bunny 2 x 2 Mosaic



OST04.10202LMOS
OST04.10202UMOS ▶
Mittens 2 x 2 Mosaic




OST06.10202LMOS
OST06.10202UMOS ▶
Teddy 2 x 2 Mosaic



OST02.1CRSLMOS ▶
Bunny Crossville Mosaic†



OST04.1CRSLMOS ▶
Mittens Crossville Mosaic†

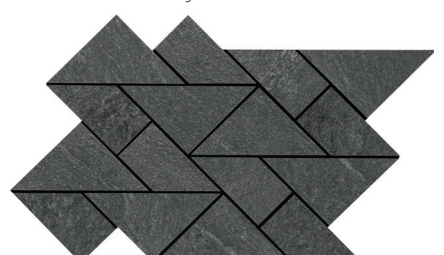

OST06.1CRSLMOS ▶
Teddy Crossville Mosaic†

† Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.



OST05 ▶ Sable 12 x 24 LTR



Floor: **OST04** ▶ Mittens 24 x 24 LTR





Floor: **OST01** ▶ Down 24 x 24 EXT
Wall: **OST01** ▶ Down Crossville Mosaic




Floor: **OST06** ▶ Teddy 24 x 48 LTR

Specifications

Sizes (Shown in OST06 Teddy)

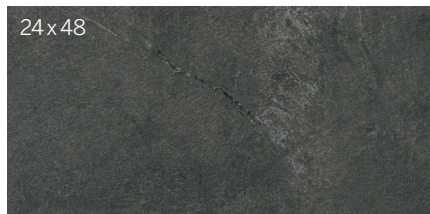

Crossville Mosaic†
(Mounted on a
217 x 372 mm sheet)



2 x 2 Mosaic
(Mounted on a
298 x 298 mm sheet)

† Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.

Trim



6 x 12 Cove Base



4 x 24 Bullnose

Get Planked!

Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment. See website for more details and sizes.



Sizes & Finishes

Field Tile - Rectified

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
12 x 24	297 x 597	9.5	3	LTR/UPS/EXT*
24 x 24	597 x 597	9.5	3	LTR/EXT
24 x 48	597 x 1197	10.5	3	LTR/UPS

Note: Field tile is rectified with a minimum 3mm grout joint

* Extended lead time on 12 x 24 EXT finish.

Mosaics

Available in all colors

Nominal (in)	Sheet Size (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Mosaic*	298 x 298	9.5	3	LTR/UPS
Crossville Mosaic**†	217 x 372	9.5	2	LTR

* Mounted on 12 x 12 sheet ** Mounted on 298mm x 298mm sheet with 3mm grout joints (Coverage area 0.9752 sf)

† Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.

Coordinating Trim

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 12 Cove Base	150 x 297	9.5	3	UPS
4 x 24 Single Bullnose	96 x 597	9.5	3	LTR/UPS

Product Performance

Water Absorption	< 0.50	ASTM (C373)
Breaking Strength	> 450 lbf	ASTM (C648)
Bond Strength	> 200 psi	ASTM (C482)
Facial Dimension	± 0.10%	ASTM (C499)
Range of Thickness (in)	0.025	ASTM (C499)
Warpage - Diagonal	± .20%	ASTM (C485)
Wedging		ASTM (C502)
Frost (Freeze/Thaw) Resistance)	Resistant	ASTM (C1026)
Chemical Resistance	Unaffected	ASTM (C650)
Stain Resistance	Unaffected	ASTM (C1378)
Scratch Hardness	7	Mohs Scale
Deep Abrasion	na	ASTM (C1243)
Crazing Resistance	Resistant	ASTM (C424)
Thermal Shock Resistance	Resistant	ASTM (C484)
Visible Abrasion Resistance		ASTM (C1027)

Wet Dynamic Coefficient of Friction Range

LTR (Leather)	0.42 - 0.52	ANSI A326.3
EXT (Exterior)	0.60 - 0.70	ANSI A326.3
UPS (Unpolished)	0.50 - 0.60	ANSI A326.3

Shade & Texture Index

Owen Stone has a shade variation of V3.

V1	V2	V3	V4	V1 Uniform appearance
				V2 Slight Variation
				V3 Moderate Variation
				V4 Substantial Variation

This porcelain tile product is produced with a V3 variation. Expect that the amount of color and texture on each piece may vary significantly. Inspect the product upon delivery and for best results, blend tile from several cartons during installation.

Recommended Use

Owen Stone™ LTR and UPS is recommended for interior floors, interior walls, countertops, exterior walls, pool waterlines and full linings[†] in both residential and commercial applications. Owen Stone LTR and UPS is not recommended for exterior horizontal surfaces or exterior paving. Owen Stone EXT is recommended for exterior floors and walls in both residential and commercial applications. See Crossville.com for detailed installation instructions.

[†]Excludes mesh mounted mosaics.

Unpolished Finish (UPS)

Crossville's® Unpolished tile features a natural, matte surface, providing an elegant, understated appearance. The non-reflective, muted finish enhances any space by adding subtle richness and depth, creating an inviting, yet sophisticated atmosphere. The soft, matte texture of these tiles exudes a timeless charm, making them an excellent choice for a wide range of design styles, from contemporary to rustic, and everything in between.

Leather Finish (LTR)

Crossville® Leather finish creates a subtle glow, visual depth, and a smooth feel. The finish is achieved by running diamond-tipped brushes over the surface of fired porcelain tile, resulting in an incredibly soft feel and tremendous visual richness. While our Leather finish may be soft to the touch, the DCOF remains high, making it suitable for residential and commercial interior floor and wall applications and exterior vertical surfaces.

Exterior Finish (EXT)

Crossville® Exterior texture is meticulously crafted to address the specific needs of outdoor walking surfaces, where enhanced traction is crucial for safety. Designed to perform in high-traffic areas, these exterior products offer the perfect combination of functionality and style, ensuring reliable grip and comfort even in the most challenging conditions. Whether it's a commercial pathway, a residential patio, or a poolside deck, the textured surface provides superior traction, giving users the confidence to walk securely, even when surfaces are wet or exposed to the elements.

Care and Maintenance

Regular cleaning is the best way to keep Owen Stone tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. No waxes or sealers are needed. More information regarding the care and maintenance of Crossville products is available at Crossville.com.

Wet area use for Owen Stone Mosaics

Crossville® produces the Owen Stone 2 x 2 and Crossville mosaics with the Leather (LTR) and Unpolished (UPS) finish. The ANSI A326.3 wet Dynamic COF of Owen Stone is ≥ 0.42 . Their small sizes ensure frequent grout joints which provides traction and drainage. Crossville cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water and poor surface cleaning.

This information is provided so that customers may make a realistic and informed decision when comparing Owen Stone to other tile products in wet area environments, such as residential/commercial bathrooms, showers, and interior pool decks.

Crossville® Sample Express

Complimentary Samples are available at [Crossville.com/Products/owen-stone](https://www.crossville.com/Products/owen-stone)

Loose Tile Samples

Sizes may vary depending on product series
Max. of 4 large field tile per order

Standard Shipping

FedEx Ground

Our Warranty

Crossville guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1-2012 and in the performance data section of the Crossville general product catalog. For complete details check our website at Crossville.com.

Crossville.com

You'll find comprehensive information about Crossville's entire portfolio of products. You can also learn about the latest styles and trends from industry experts, download detailed care and maintenance instructions for our various products, or browse electronic versions of Crossville's product brochures. So whether you need information about Crossville products or tile in general, please visit us at Crossville.com.

Information listed here is subject to change. Please refer to Crossville.com for the latest, most accurate information.

©2025 AHF, LLC. All trademarks are owned by AHF, LLC, or its subsidiaries or affiliates. | Printed in USA. NOTE: Due to printing limitations, colors pictured cannot be guaranteed to match actual material.

Trade Organizations



Environmentally Aware



Owen Stone™

Crossville®

349 Sweeney Drive
Crossville, Tennessee
38555

Phone 931.484.2110
Fax 931.456.2956
E-Mail Crossc@Crossvilleinc.com
Web Crossville.com



Above:

Floor: **OST01** ▶ Down 24 x 24 EXT

Wall: **OST01** ▶ Down Crossville Mosaic

On the cover:

Floor: **OST05** ▶ Sable 12 x 24 LTR

Wall: **OST05** ▶ Sable 12 x 24 LTR

Wall Behind the Tub: **OST03** ▶ Slipper Crossville Mosaic

 CROSSVILLE®

Owen Stone™

Porcelain Stone®

Available Colors



OST01 ▶ Down



OST02 ▶ Bunny




OST03 ▶ Slipper



OST04 ▶ Mittens



OST05 ▶ Sable

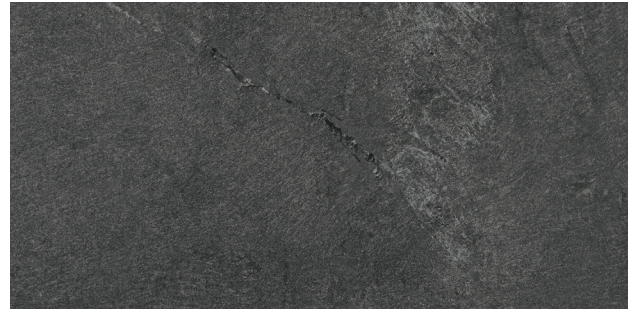

OST06 ▶ Teddy

Features and Benefits

- Three finishes including Unpolished (UPS) for a natural, matte surface
- Unique Leather (LTR) finish offers the softest touch
- Subtle, minimalist veining resists high traffic and the elements indoors and out, thanks to an additional textured Exterior (EXT) finish offered in the line, for installations that flow from indoors to out.
- Field tiles range from 12"x24" to 24"x48"
- The collection's distinctive triangular mosaic opens many design possibilities for floors and walls along with a 2"x2" mosaic.
- Complete your installations with 4 x 24 bullnose or 6 x 12 cove base
- Made in the USA




Owen Stone™

Porcelain Stone®


Owen Stone 2 x 2 and Crossville Mosaics




OST01.10202LMOS
OST01.10202UMOS ▶
Down 2 x 2 Mosaic



OST03.10202LMOS
OST03.10202UMOS ▶
Slipper 2 x 2 Mosaic




OST05.10202LMOS
OST05.10202UMOS ▶
Sable 2 x 2 Mosaic

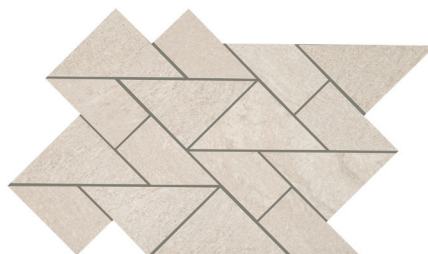

OST01.1CRSLMOS ▶
Down Crossville Mosaic†



OST03.1CRSLMOS ▶
Slipper Crossville Mosaic†

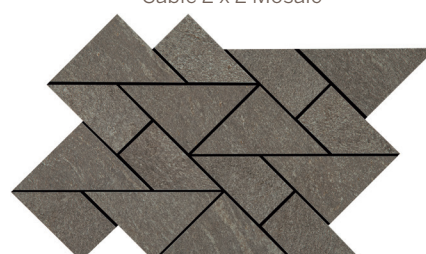


OST05.1CRSLMOS ▶
Sable Crossville Mosaic†



OST02.10202LMOS
OST02.10202UMOS ▶
Bunny 2 x 2 Mosaic



OST04.10202LMOS
OST04.10202UMOS ▶
Mittens 2 x 2 Mosaic



OST06.10202LMOS
OST06.10202UMOS ▶
Teddy 2 x 2 Mosaic



OST02.1CRSLMOS ▶
Bunny Crossville Mosaic†



OST04.1CRSLMOS ▶
Mittens Crossville Mosaic†



OST06.1CRSLMOS ▶
Teddy Crossville Mosaic†

† Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.




Owen Stone™


Porcelain Stone®



Sizes (Shown in OST06 Teddy)

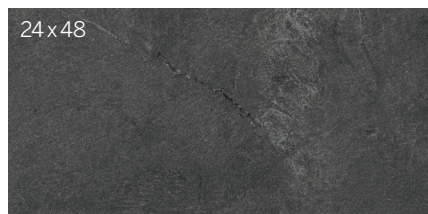

Crossville Mosaic†
(Mounted on a
217 x 372 mm sheet)



2 x 2 Mosaic
(Mounted on a
298 x 298 mm sheet)


Trim



6 x 12 Cove Base



4 x 24 Bullnose

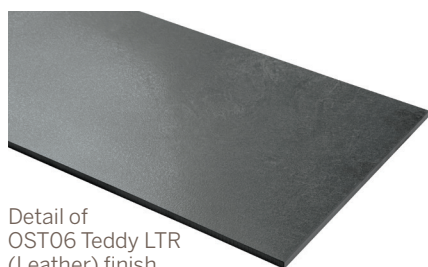

Detail of
OST06 Teddy LTR
(Leather) finish.

Get Planked!

Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment.

See website for more details and sizes.



Sizes & Finishes

Field Tile - Rectified

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
12 x 24	297 x 597	9.5	3	LTR/UPS/EXT*
24 x 24	597 x 597	9.5	3	LTR/EXT
24 x 48	597 x 1197	10.5	3	LTR/UPS

Note: Field tile is rectified with a minimum 3mm grout joint

* Extended lead time on 12 x 24 EXT finish.

Mosaics

Available in all colors

Nominal (in)	Sheet Size (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Mosaic*	298 x 298	9.5	3	LTR/UPS
Crossville Mosaic**†	217 x 372	9.5	2	LTR

* Mounted on 12 x 12 sheet ** Mounted on 298mm x 298mm sheet with 3mm grout joints (Coverage area 0.9752 sf)

† Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.

Coordinating Trim

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 12 Cove Base	150 x 297	9.5	3	UPS
4 x 24 Single Bullnose	96 x 597	9.5	3	LTR/UPS

Product Performance

Water Absorption	< 0.50	ASTM (C373)
Breaking Strength	> 450 lbf	ASTM (C648)
Bond Strength	> 200 psi	ASTM (C482)
Facial Dimension	± 0.10%	ASTM (C499)
Range of Thickness (in)	0.025	ASTM (C499)
Warpage - Diagonal	± .20%	ASTM (C485)
Wedging		ASTM (C502)
Frost (Freeze/Thaw) Resistance)	Resistant	ASTM (C1026)
Chemical Resistance	Unaffected	ASTM (C650)
Stain Resistance	Unaffected	ASTM (C1378)
Scratch Hardness	7	Mohs Scale
Deep Abrasion	na	ASTM (C1243)
Crazing Resistance	Resistant	ASTM (C424)
Thermal Shock Resistance	Resistant	ASTM (C484)
Visible Abrasion Resistance		ASTM (C1027)

Wet Dynamic Coefficient of Friction Range

LTR (Leather)	0.42 - 0.52	ANSI A326.3
EXT (Textured)	0.60 - 0.70	ANSI A326.3
UPS (Unpolished)	0.50 - 0.60	ANSI A326.3

Shade & Texture Index

Owen Stone has a shade variation of V3.

V1	V2	V3	V4	V1 Uniform appearance
				V2 Slight Variation
				V3 Moderate Variation
				V4 Substantial Variation

This porcelain tile product is produced with a V3 variation. Expect that the amount of color and texture on each piece may vary significantly. Inspect the product upon delivery and for best results, blend tile from several cartons during installation.

Recommended Use

Owen Stone™ LTR and UPS is recommended for interior floors, interior walls, countertops, exterior walls, pool waterlines and full linings† in both residential and commercial applications. Owen Stone LTR and UPS is not recommended for exterior horizontal surfaces or exterior paving. Owen Stone EXT is recommended for exterior floors and walls in both residential and commercial applications. See Crossville.com for detailed installation instructions.

† Excludes mesh mounted mosaics.

Unpolished Finish (UPS)

Crossville's® Unpolished tile features a natural, matte surface, providing an elegant, understated appearance. The non-reflective, muted finish enhances any space by adding subtle richness and depth, creating an inviting, yet sophisticated atmosphere. The soft, matte texture of these tiles exudes a timeless charm, making them an excellent choice for a wide range of design styles, from contemporary to rustic, and everything in between.

Leather Finish (LTR)

Crossville® Leather finish creates a subtle glow, visual depth, and a smooth feel. The finish is achieved by running diamond-tipped brushes over the surface of fired porcelain tile, resulting in an incredibly soft feel and tremendous visual richness. While our Leather finish may be soft to the touch, the DCOF remains high, making it suitable for residential and commercial interior floor and wall applications and exterior vertical surfaces.

Exterior Finish (EXT)

Crossville® Exterior texture is meticulously crafted to address the specific needs of outdoor walking surfaces, where enhanced traction is crucial for safety. Designed to perform in high-traffic areas, these exterior products offer the perfect combination of functionality and style, ensuring reliable grip and comfort even in the most challenging conditions. Whether it's a commercial pathway, a residential patio, or a poolside deck, the textured surface provides superior traction, giving users the confidence to walk securely, even when surfaces are wet or exposed to the elements.

Care and Maintenance

Regular cleaning is the best way to keep Owen Stone tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. No waxes or sealers are needed. More information regarding the care and maintenance of Crossville products is available at Crossville.com.

Wet area use for Owen Stone Mosaics

Crossville® produces the Owen Stone 2 x 2 and Crossville mosaics with the Leather (LTR) and Unpolished (UPS) finish. The ANSI A326.3 wet Dynamic COF of Owen Stone is ≥0.42. Their small sizes ensure frequent grout joints which provides traction and drainage. Crossville cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water and poor surface cleaning.

This information is provided so that customers may make a realistic and informed decision when comparing Owen Stone to other tile products in wet area environments, such as residential/ commercial bathrooms, showers, and interior pool decks.

▶▶ Crossville® Sample Express

Complimentary Samples are available at **Crossville.com/Products/owen-stone**

Loose Tile Samples

Sizes may vary depending on product series
Max. of 4 large field tile per order

Standard Shipping

FedEx Ground

Our Warranty

Crossville guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1-2012 and in the performance data section of the Crossville general product catalog. For complete details check our website at Crossville.com.

Crossville.com

You'll find comprehensive information about Crossville's entire portfolio of products. You can also learn about the latest styles and trends from industry experts, download detailed care and maintenance instructions for our various products, or browse electronic versions of Crossville's product brochures. So whether you need information about Crossville products or tile in general, please visit us at Crossville.com.

Information listed here is subject to change. Please refer to Crossville.com for the latest, most accurate information.

Trade Organizations



Environmentally Aware

