

GARDEN STATE TILE

Together We Can Design For Life

LARK



## COLORS / SIZES




6"x24" - 1106036

### Arctic



3"x24" - 1106047

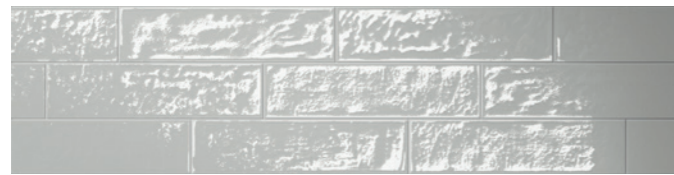


6"x24" - 1106038

### Gray




3"x24" - 1106049

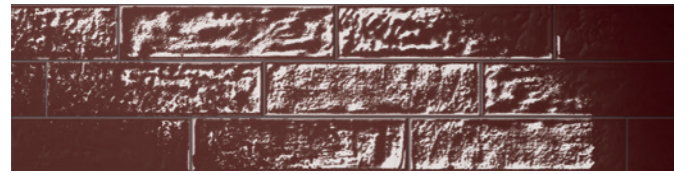


6"x24" - 1106040

### Crimson

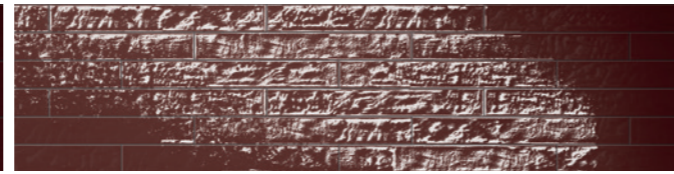


3"x24" - 1106051

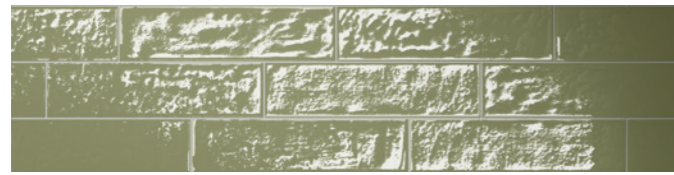


6"x24" - 1106043

### Olive

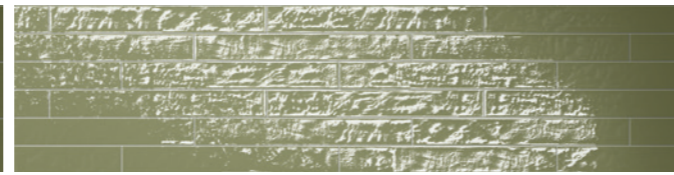


3"x24" - 1106053

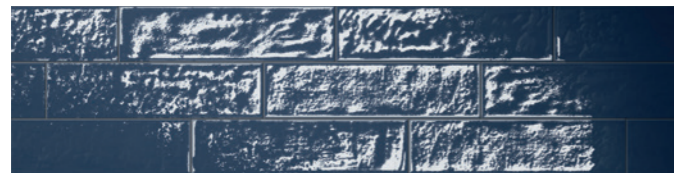


6"x24" - 1106045

### Navy

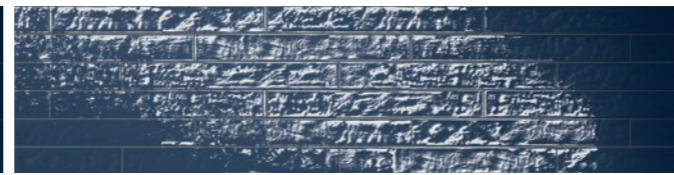

3"x24" - 1106055

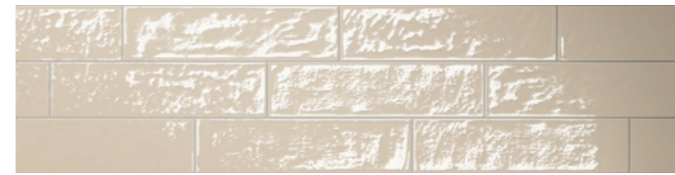


6"x24" - 1106037

### Almond




3"x24" - 1106048

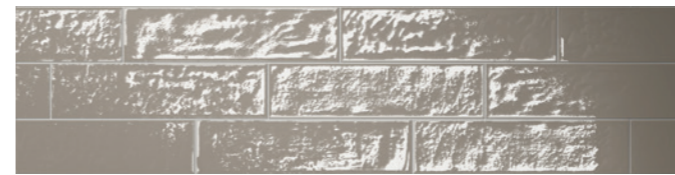


6"x24" - 1106039

### Urban

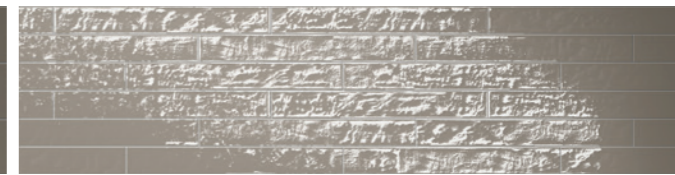

3"x24" - 1106050

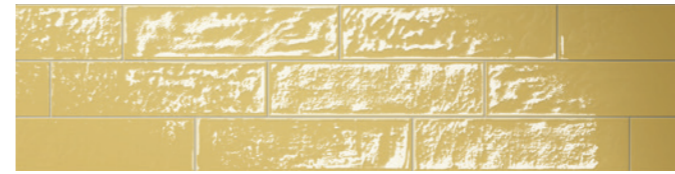


6"x24" - 1106042

### Gold




3"x24" - 1106052

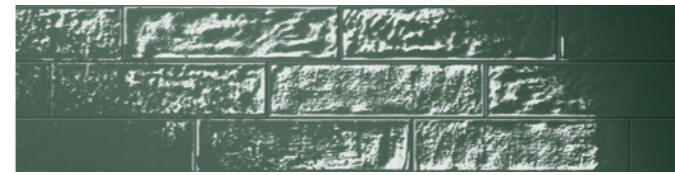


6"x24" - 1106044

### Pine

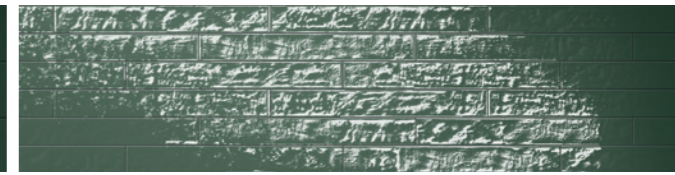


3"x24" - 1106054

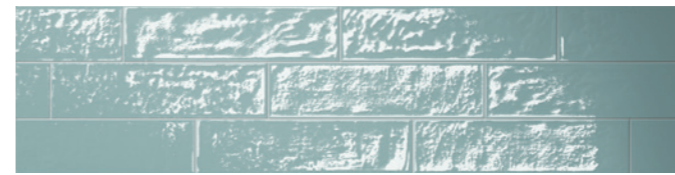

6"x24" - 1106046

### Blue

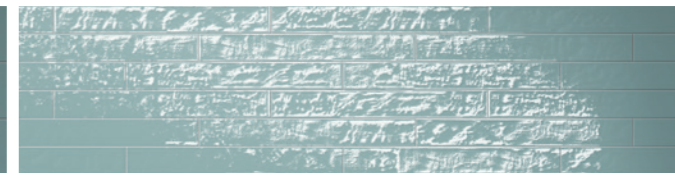

3"x24" - 1106056



Colors shown may vary from actual product.  
Final selection should be made from actual product samples.



Blue / Arctic 3"x24" Glossy




Gold 3"x24" Glossy

Navy 6"x24" Glossy



Urban 6"x24" Glossy

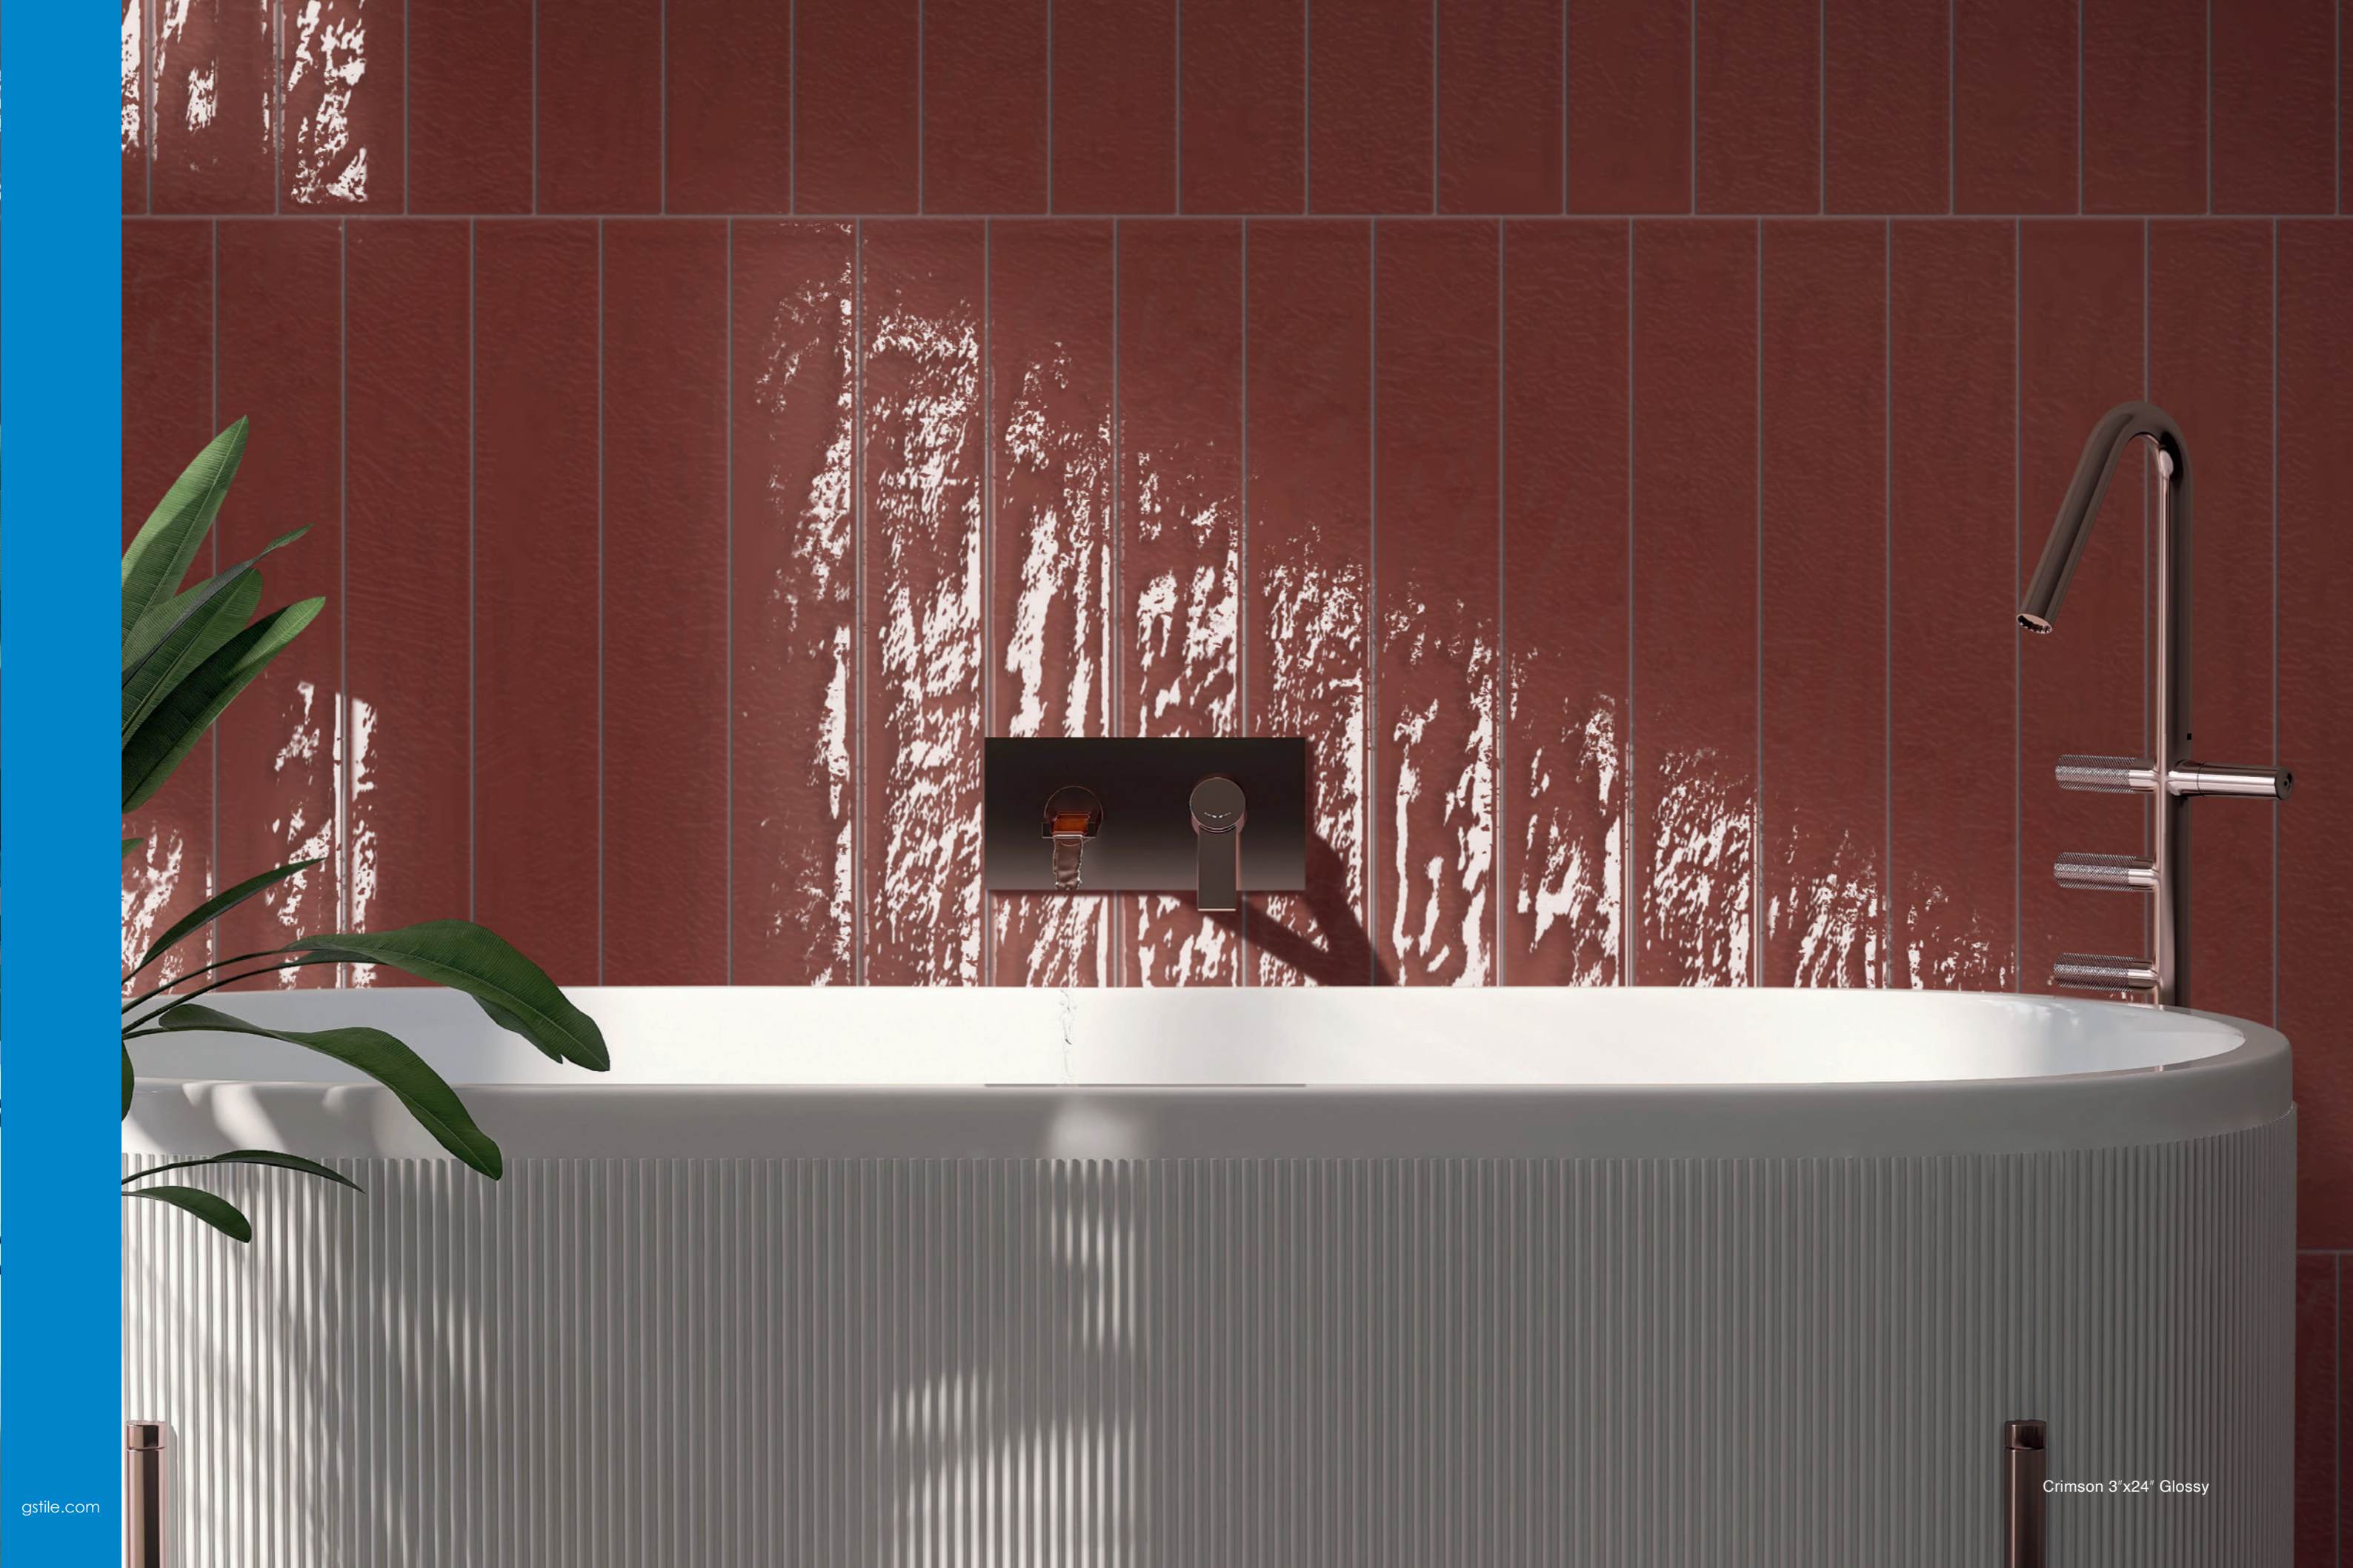



Pine 3"x24" Glossy



Almond 6"x24" Glossy



Olive / Gray 3"x24" Glossy

## Colors + Sizes

Colors	3"x24"	6"x24"
Arctic	1106047	1106036
Almond	1106048	1106037
Gray	1106049	1106038
Urban	1106050	1106039
Crimson	1106051	1106040
Gold	1106052	1106042
Olive	1106053	1106043
Pine	1106054	1106044
Navy	1106055	1106045
Blue	1106056	1106046

Colors shown may vary from actual product.  
Final selection should be made from actual product samples.
















## Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.  
Este producto cumple o excede todos los estandares de ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET (MATTE SURFACES)	
			OUTDOOR >0.55 WET	>0.55 WET (2CM & GRIP)	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN 6MM	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS GAUGED PORCELAIN	ASTM C499	Range: ± 0.02 in	≤0.02 in	
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	
	LENGTH / WIDTH VARIATION	ASTM C499	±0.25% or ±0.03 in (±0.8 mm)	±0.25%	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

# Green Certifications

 <p><b>Human Health</b></p>	 <p><b>Declare.</b></p> <p>✓</p> <p>Declare Red List Free</p>	 <p>VERSION 2.0</p> <p>✓</p> <p>HPD measured down to 100ppm</p>	 <p>UL GREENGUARD</p> <p>PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL29186G1 UL29186G2</p> <p>GOLD</p> <p>✓</p> <p>Greenguard Gold Certified (Inherently Non-Emitting)</p>
 <p><b>Ecosystem Health</b></p>	 <p>POST - Consumer Recycled Content</p> <p>✓</p> <p>As much as 64% post-consumer recycled content.</p>	 <p>GREEN SQUARED</p> <p>✓</p> <p>Green Squared Certified</p>	 <p>PFAS</p> <p>PVC</p> <p>VOC</p> <p>✓</p> <p>Contains no PFAS, PVC, or VOCs</p>
 <p><b>Climate Health</b></p>	 <p>THE INTERNATIONAL EPD® SYSTEM</p> <p>✓</p> <p>Third Party verified EPD GWP 6mm - 16.09 kg/m<sup>2</sup> GWP 8mm - 22.8 kg/m<sup>2</sup> GWP 2CM - 56.25 kg/m<sup>2</sup></p>	 <p>✓</p> <p>100% of the raw material used in the body of our tile is regionally sourced, supporting sustainable practices and local industries.</p>	
 <p><b>Social Health &amp; Equity</b></p>	 <p>✓</p> <p>Certified B Corp (as of 2025)</p>	 <p>✓</p> <p>Registered Benefit Corporation in the state of TN (as of 2022)</p>	 <p>✓</p> <p>ISO 9001 Certified ISO 14001 Certified</p>



## OUR SHOWROOMS

### NEW JERSEY

- Dover
- Princeton
- Wall
- West Berlin
- Wyckoff

### PENNSYLVANIA

- Bethlehem
- Lancaster
- Philadelphia
- Warminster

### SOUTH CAROLINA

- Charleston
- Columbia

### GEORGIA

- Savannah

# GARDEN STATE TILE

Together We Can Design For Life

GSTILE.COM    @GARDENSTATETILE1957