

# COVE



# COVE

The Cove porcelain collection takes inspiration from the rugged coastal shores of South Dorset on the Isle of Portland in the UK. By using the latest glazing technology, realistic details of natural veining and shade variations of Jurassic limestone are enhanced with subtle texture that flows with the pattern on each piece of tile.

Cove brings a balance of form and function to both residential and commercial interiors, ideal for spa-like bathrooms, sophisticated kitchens, elegant lobbies, and refined hospitality spaces.

Cove is available in five neutral colors and one field tile size—12x24—providing design flexibility for both small and large-scale applications. Two finish options are available: UPS for interior spaces, and EXT for exterior use in the 12x24 size, allowing for seamless visual continuity between indoor and outdoor environments. Matching bullnose and cove base trim support functional, code-compliant installations, while the mosaic option—a 2x4 stacked—adds refined detail and creative versatility.



Photo: Isle of Portland, UK




# COVE COLOR PALETTE

## COLORS


---



**PDC01** ▶ Fawn

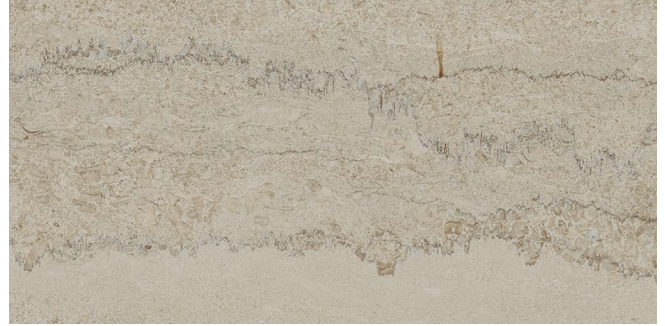


**PDC02** ▶ Beige

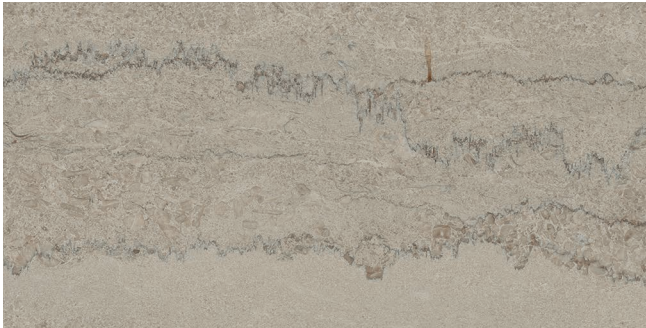

**PDC03** ▶ Greige




**PDC04** ▶ Grey

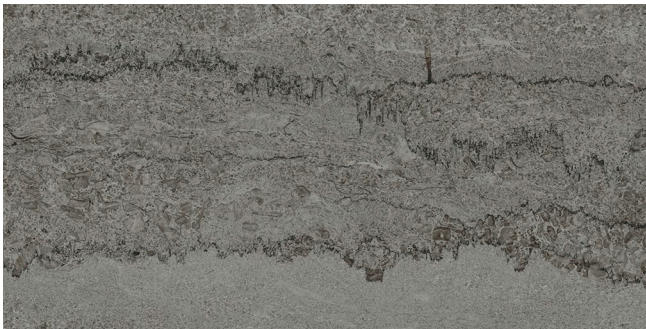

**PDC05** ▶ Dark Grey

## MOSAIC

---

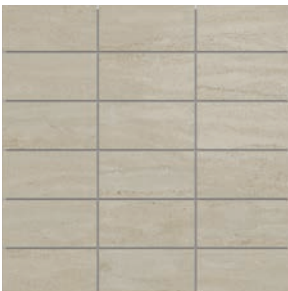


2 x 4 Stacked Mosaics Mounted on a 296.9 x 296.9 sheet



Floor: **PDC02** ▶Beige 12 x 24  
Wall: **PDC02** ▶Beige 12 x 24

# COVE SPECIFICATIONS

Size (in)	Actual Size (mm)	Thickness (mm)	Grout Joint (mm)	Finish
12 x 24	297 x 597	9.5	3.0	UPS/EXT
2 x 4 Stacked Mosaic	296.9 x 296.9	9.5	2.5	UPS
4 x 24 Bullnose	97 x 597	9.5	3.0	UPS
6 x 12 Cove Base	150 x 297	9.5	3.0	UPS



2 x 4 Stacked Mosaics  
Mounted on a 296.9 x 296.9 sheet



4 x 24 Single Bullnose



6 x 12 Cove Base

Technical Data	Performance
Water Absorption	< 0.50
Breaking Strength	> 450 lbf
Bond Strength	> 200 psi
Facial Dimension	± 0.10%
Range of Thickness (in)	0.025
Warpage - Diagonal	± 0.20%
Frost	Resistant
Chemical Resistance	Unaffected
Stain Resistance	Unaffected
Scratch Hardness	7 mohs
Deep Abrasion	N/A
Crazing Resistance	Resistant
Thermal Shock Resistance	Resistant
Wet DCOF Range	UPS 0.42-0.52 EXT 0.60-0.70
Shade Variation	V3

# COVE USE & CARE

## Recommended Use

Cove is recommended for interior floors dry, interior walls, countertops, exterior walls, pool waterlines and full linings† in both residential and commercial applications. Cove is not recommended for exterior horizontal surfaces or exterior paving.

† Excludes mesh mounted mosaics.

## Care and Maintenance

Regular cleaning is the best way to keep Cove tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed.

## Wet area use for Mosaics

Cove 2x4 Stacked Mosaic is produced with the UPS finish. The ANSI A326.3 wet Dynamic COF of Cove is  $\geq 0.42$ . Their small sizes ensure frequent grout joints which provides traction and drainage. GST cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water and poor surface cleaning.

This information is provided so that customers may make a realistic and informed decision when comparing Cove to other tile products in wet area environment, such as residential/commercial bathrooms, showers, and interior pool decks.

## Our Warranty

Products will meet or exceed the performance specifications outlined in ANSI A137.1 and in the performance data section of the general product catalog.



Wall: **PDC03** ▶Greige 2 x 4 Stacked Mosaics UPS

## Trade Organizations



## Environmentally Aware





## OUR SHOWROOMS

### NEW JERSEY

Dover  
Princeton  
Wall  
West Berlin  
Wyckoff

### PENNSYLVANIA

Bethlehem  
Lancaster  
Philadelphia  
Warminster

### SOUTH CAROLINA

Charleston  
Columbia

### GEORGIA

Savannah

# GARDEN STATE TILE

Together We Can Design For Life

GSTILE.COM    @GARDENSTATETILE1957