

GARDEN STATE TILE

Together We Can Design For Life

VERDANT



VERDANT



VERDANT


Verdant acts as a tribute to the everyday natural wonders that surround us. Each color pays homage to the environment that inspires it, and the glossy surface offers a dynamic finish that evokes natural movement as you exist around it. Experience the harmony of nature with Verdant, and invite the outside in.

Contents

Colors / Sizes / Mosaics	pg. 2
Visualizations	pg. 4
Specifications	pg. 14
Accreditations	pg. 16




COLORS / SIZES

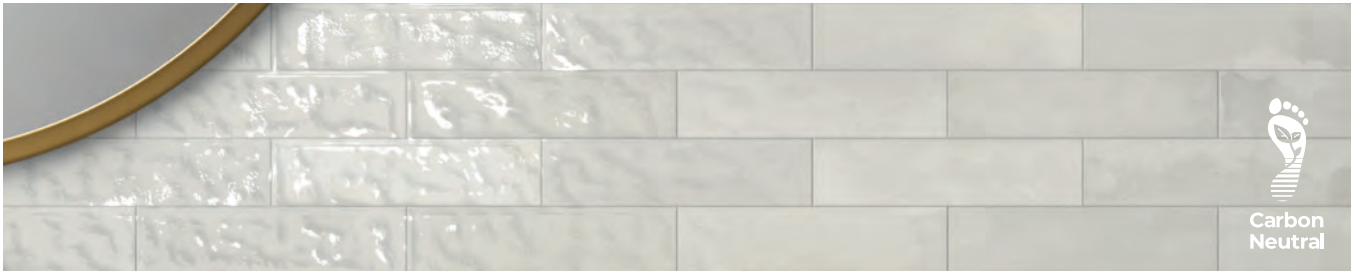

GLACIER 3"x12" - 1104966



MOON 3"x12" - 1104971

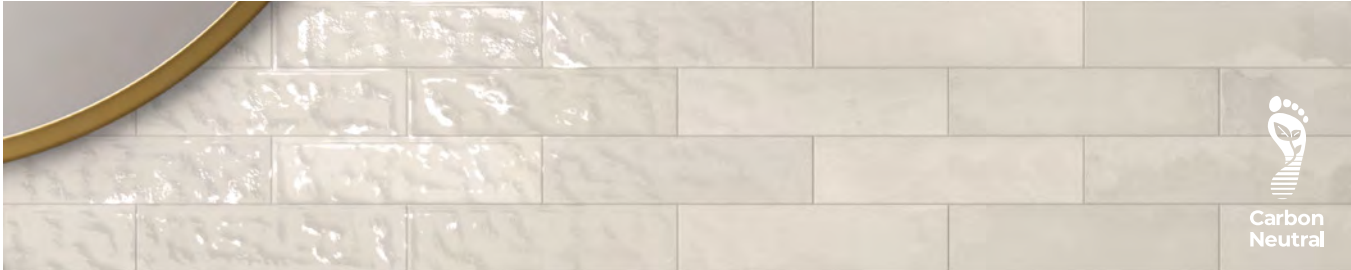

WARM 3"x12" - 1106426



BISCUIT 3"x12" - 1106425



DESERT 3"x12" - 1104970



SKY 3"x12" - 1104967



FOREST 3"x12" - 1104969



OCEAN 3"x12" - 1104968

Colors shown may vary from actual product.
Final selection should be made from actual product samples.

Porcelain tile has the
lowest embodied
carbon of any
competing flooring
product.





Wall: Verdant Moon
3"x12" Glossy Floor:
Rainier Birch
8"x48" Matte



Wall: Verdant Warm 3"x12" Glossy



Wall: Verdant Desert 3" x12" Glossy
Floor: Refuge Cross-Cut Fog 24" x48" Matte



Wall: Verdant Desert 3"x12" Glossy
Floor: EcoStone Cross-Cut Fog 24"x48" Matte



100% of the raw materials used in the production of Verdant tiles are regionally sourced, supporting local industries and reducing transportation related carbon emissions.



Wall: Verdant Sky 3"x12" Glossy
Floor: Rainier Chestnut 8"x48" Matte



Verdant Forest 3"x12" Glossy

As a part of our pledge to become carbon neutral, Verdant serves as a vital step in the process of creating a more sustainable world.

It's time to take responsibility.



Colors + Sizes

Colors	3"x12"	3"x12" Bullnose
GLACIER	1104966	1105207
MOON	1104971	1105212
WARM	1106426	1106428
BISCUIT	1106425	1106427
DESERT	1104970	1105211
SKY	1104967	1105208
FOREST	1104969	1105210
OCEAN	1104968	1105209

Colors shown may vary from actual product.
Final selection should be made from actual product samples.


Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1.
Este producto cumple o excede todos los estandares de ANSI A137.1.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE@stone VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
	D.C.O.F. Acütest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET (MATTE SURFACES)	
			OUTDOOR >0.55 WET	>0.55 WET (2CM & GRIP)	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN 6MM	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	Compliant	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	Compliant	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	Compliant	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	Compliant	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	Compliant	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	Compliant	Calibrated
	THICKNESS GAUGED PORCELAIN	ASTM C499	Range: ± 0.02 in	≤0.02 in	
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	
	LENGTH / WIDTH VARIATION	ASTM C499	±0.25% or ±0.03 in (±0.8 mm)	±0.25%	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

Green Certifications

 Human Health	 Declare. ✓ Declare Red List Free  VERSION 2.0 ✓ HPD measured down to 100ppm  GREENGUARD PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL 2818 GOLD ✓ Greenguard Gold Certified (Inherently Non-Emitting)
 Ecosystem Health	 POST - Consumer Recycled Content ✓ As much as 64% post-consumer recycled content.  GREEN SQUARED ✓ Green Squared Certified  PFAS PVC VOC ✓ Contains no PFAS, PVC, or VOCs
 Climate Health	 EPD® THE INTERNATIONAL EPD® SYSTEM ✓ Third Party verified EPD GWP 6mm - 16.09 kg/m² GWP 8mm - 22.8 kg/m² GWP 2CM - 56.25 kg/m²  ✓ 100% of the raw material used in the body of our tile is regionally sourced, supporting sustainable practices and local industries.
 Social Health & Equity	 Certified B Corporation ✓ Certified B Corp (as of 2025)  BENEFIT CORPORATION ✓ Registered Benefit Corporation in the state of TN (as of 2022)  bsi ISO 9001 Quality Management Systems CERTIFIED ISO 14001 Environmental Management Systems CERTIFIED ✓ ISO 9001 Certified ISO 14001 Certified





OUR SHOWROOMS

NEW JERSEY

Dover
Princeton
Wall
West Berlin
Wyckoff

PENNSYLVANIA

Bethlehem
Lancaster
Philadelphia
Warminster

SOUTH CAROLINA

Charleston
Columbia

GEORGIA

Savannah

GARDEN STATE TILE
Together We Can Design For Life

GSTILE.COM



@GARDENSTATETILE1957