


GARDEN STATE TILE

Together We Can Design For Life

BELLEZA



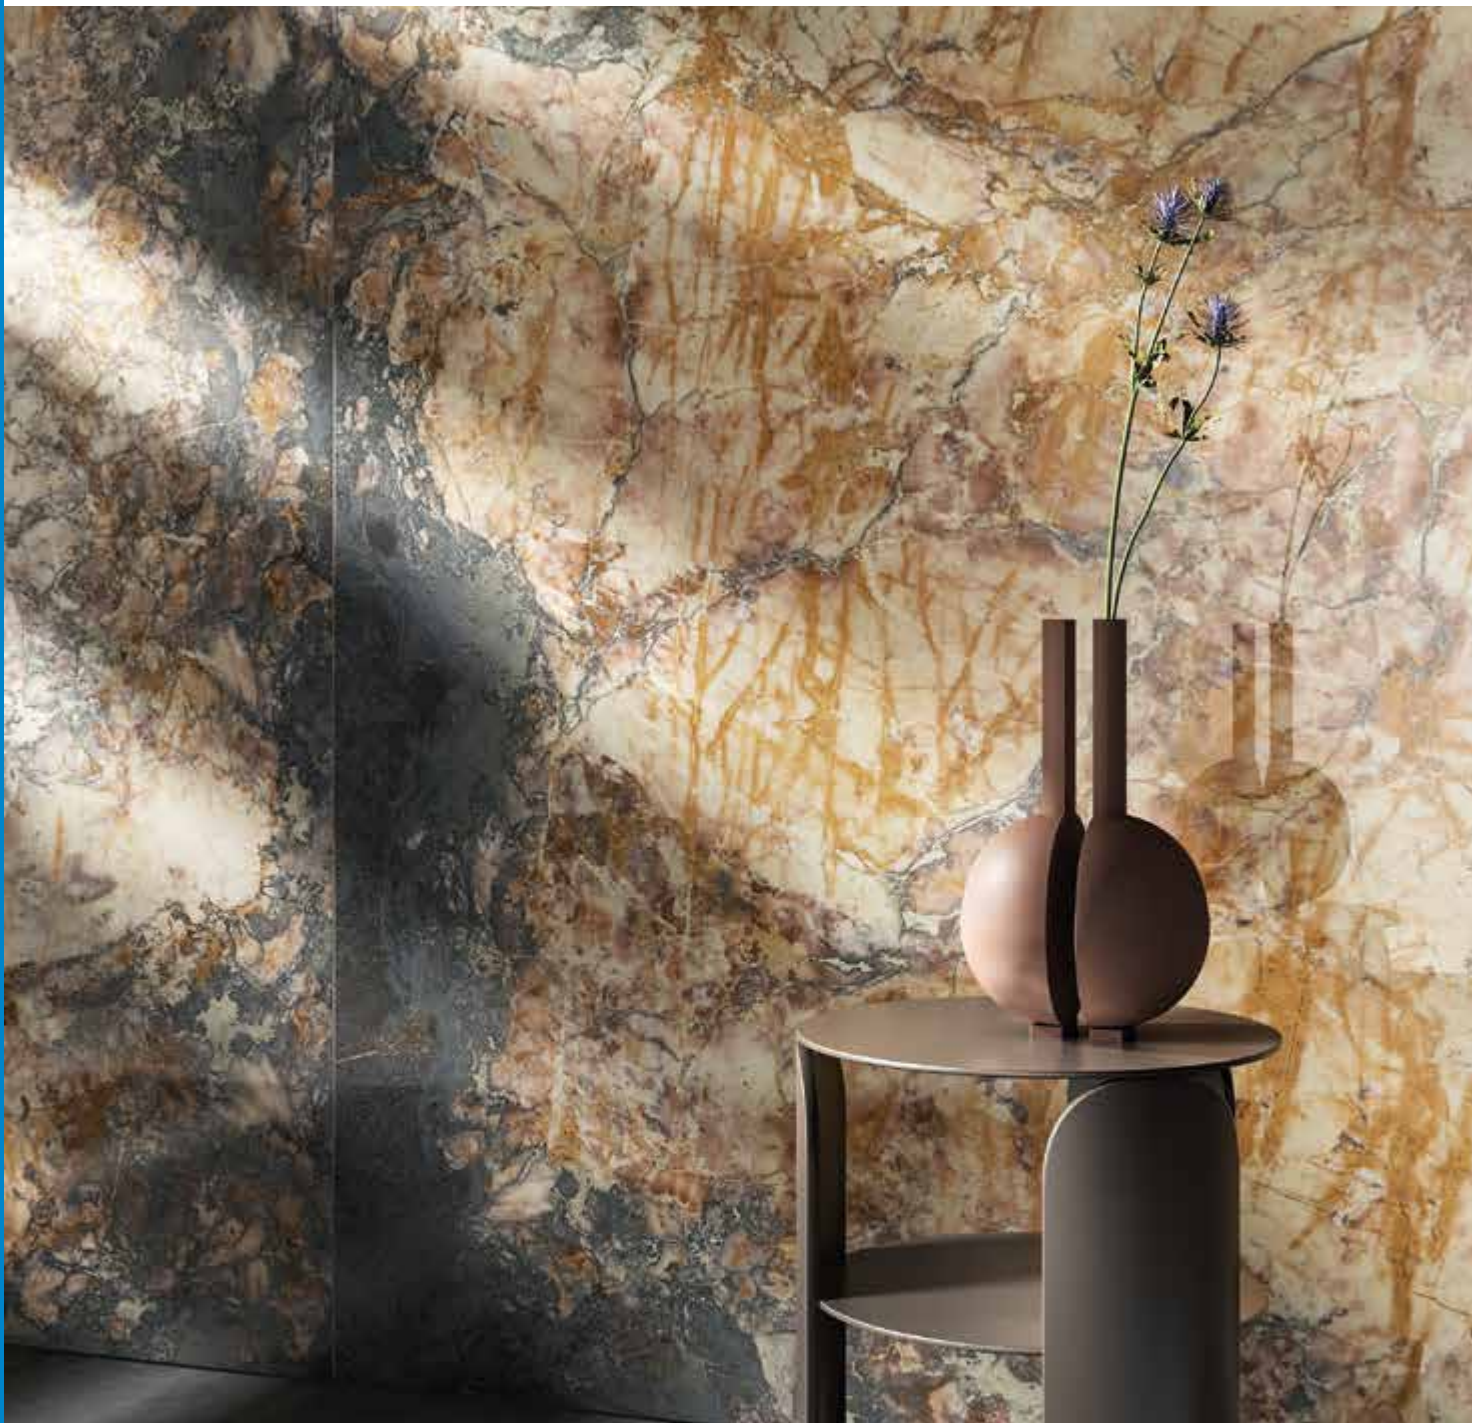

ONYX GREEN



AE OXG6 278 LP
AE OXG6 120 LPM





OxG	code	info
 120x278 - 48"x110"	AE OXG6 278 LPM 191512	LPM +
	AE OXG6 278 LP 191986	6,5 LP ++
 120x120 - 48"x48"	AE OXG6 120 LPM 191516	LPM +
	AE OXG6 120 LP 191991	6,5 LP ++
 60x120 - 24"x48"	AE OXG6 12 LPM 191520	LPM +
	AE OXG6 12 LP 192006	6,5 LP ++





CALACATTA PAONAZZO



AE PAZ 278 LP
 WS 278 PH RM
 YKSG 2012B RM



AE PAZ 278 LP
 YKSG 2012B RM



VIS6 278BC RM
AE PAZ6 120 LPM





AE PAZ6 278 LP
BLANCO6 120A RM



PAZ	code	info
 120x278 - 48"x110"	AE PAZ6 278 LPM 191513	LPM + 6,5
	AE PAZ6 278 LP 191987	LP + 6,5
 120x120 - 48"x48"	AE PAZ6 120 LPM 191517	LPM + 6,5
	AE PAZ6 120 LP 191992	LP + 6,5
 60x120 - 24"x48"	AE PAZ6 12 LPM 191521	LPM + 6,5
	AE PAZ6 12 LP 192007	LP + 6,5





BRECHE VENDOME



AEVEN6/278LLP
MAXX16/12ACERM



VIS: 278PB RM
AEVEN: 278LPM
AEVEN: 120LPM





VEN	code	info
 120x278 - 48"x110"	AE VEN6 278 LPM 191514	LPM 6,5
	AE VEN6 278 LP 191988	LP
 120x120 - 48"x48"	AE VEN6 120 LPM 191518	LPM 6,5
	AE VEN6 120 LP 191993	LP
 60x120 - 24"x48"	AE VEN6 12 LPM 191522	LPM 6,5
	AE VEN6 12 LP 192008	LP





COLLEMANDINA



AEICOD6.2781PM1
MAXX16.120GRM1





COL	code	info
 120x278 - 48"x110"	AE COL6 278 LPM 191510	LPM + 6,5
	AE COL6 278 LP 191974	LP +
 120x120 - 48"x48"	AE COL6 120 LPM 191515	LPM + 6,5
	AE COL6 120 LP 191990	LP +
 60x120 - 24"x48"	AE COL6 12 LPM 191519	LPM + 6,5
	AE COL6 12 LP 192005	LP +



Calacatta Picasso




Calacatta Picasso, originally from Garfagnana in Italy, it makes diversity its key feature. Its white and cream background is wrapped in grey, black and reddish veins which create "graphic" movements rich in surprising colours and designs.








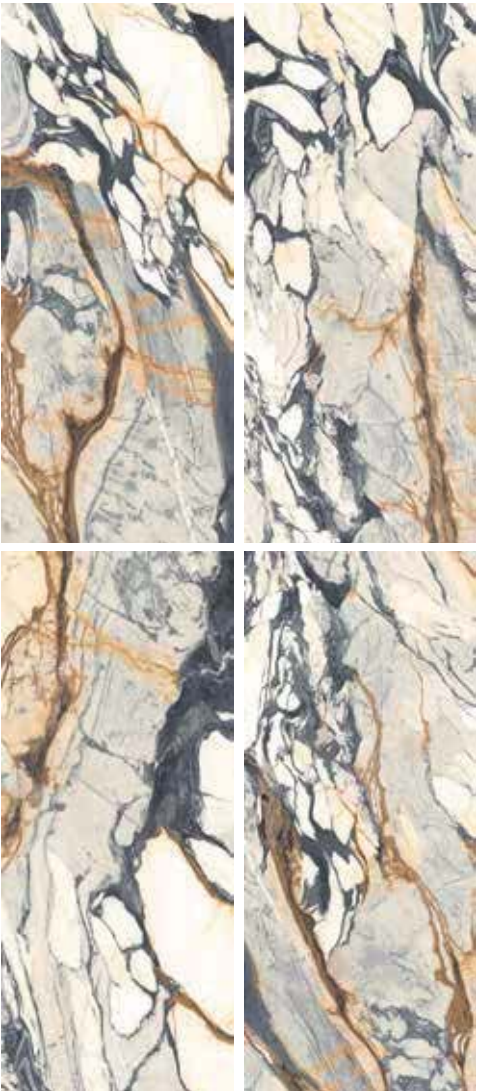


4 grafiche differenti / 4 different graphics

CAL PI

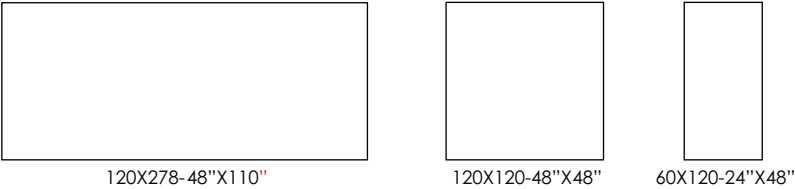

		CAL PI6 278 LP 191934	CAL PI6 120 LP 191938	CAL PI6 12 LP 191941
		CAL PI6 278 LPM 191437	CAL PI6 120 LPM 191441	CAL PI6 12 LPM 191445

Montecarlo Black

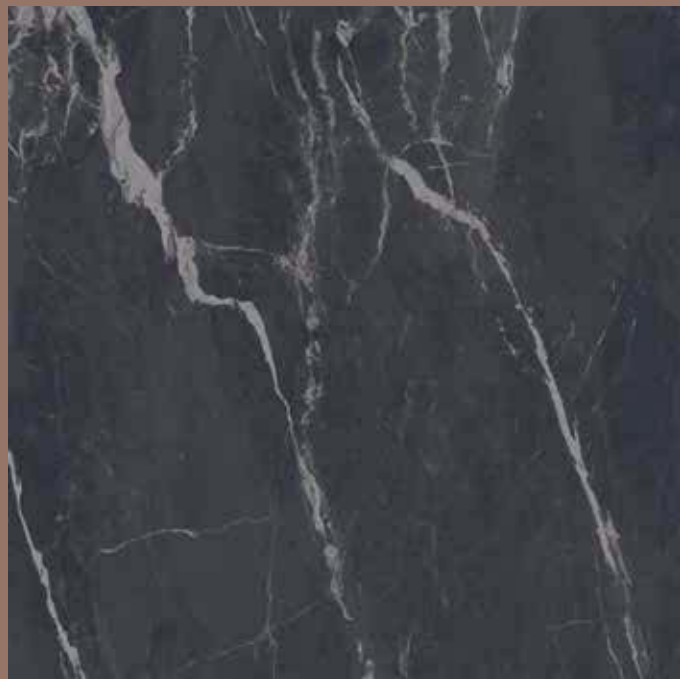

Montecarlo Black, a marble of African origin in typical black colour threaded with both fine and thick white veins.



MONTECARLO BLACK

PLECOS6 278LP / MON BL6 120 LPM





MONTECARLO BLACK

COLOR BODY PORCELAIN TILE






RM


V2

6,5

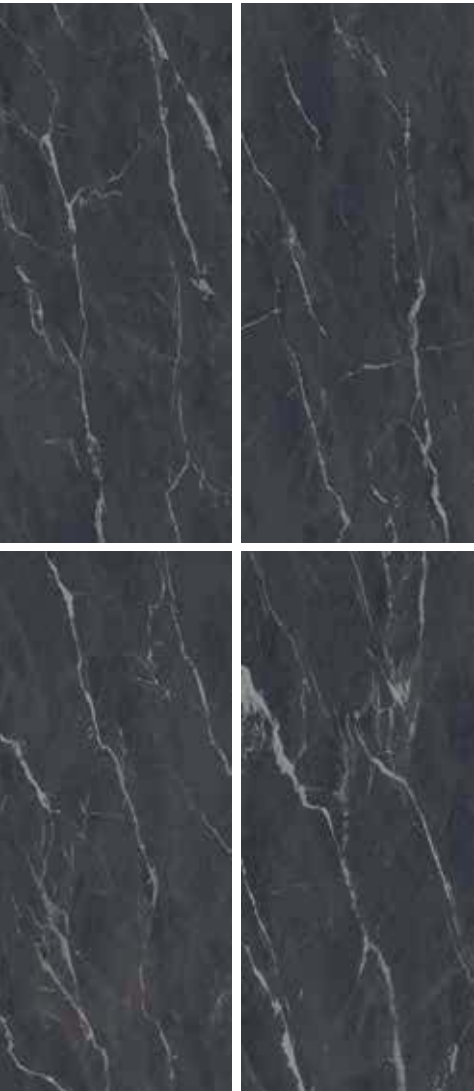

4 grafiche differenti / 4 different graphics

MON BL

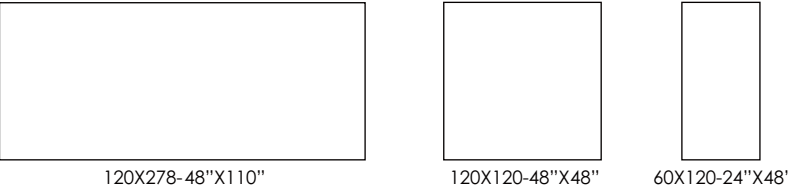

  	MON BL6 278 LP 191935	MON BL6 120 LP 191939	MON BL6 12 LP 191942
	MON BL6 278 LPM 191438	MON BL6 120 LPM 191442	MON BL6 12 LPM 191446

Irish Green



Irish green, extracted from Ireland's western coast, it enhances the varied shades of green, characterised by the uneven base colouring and the numerous hues ranging from clear to dark, and of which there are forty, according to legend.







IRISH GREEN

COLOR BODY PORCELAIN TILE





RM


V2

6,5




4 grafiche differenti / 4 different graphics

IRI GR



120X278-48"X110"



120X120-48"X48"



60X120-24"X48"



LP



LPM

IRI GR6 278 LP
191937

IRI GR6 120 LP
175672

IRI GR6 12 LP
175676

IRI GR6 278 LPM
191440

IRI GR6 120 LPM
191444


IRI GR6 12 LPM
191448

Tiffany Green



This is a little-known, quartzite of South American origin, with a veined texture of small black and white veins and an unusual green background, very similar to that of the well-known jewellery shop.



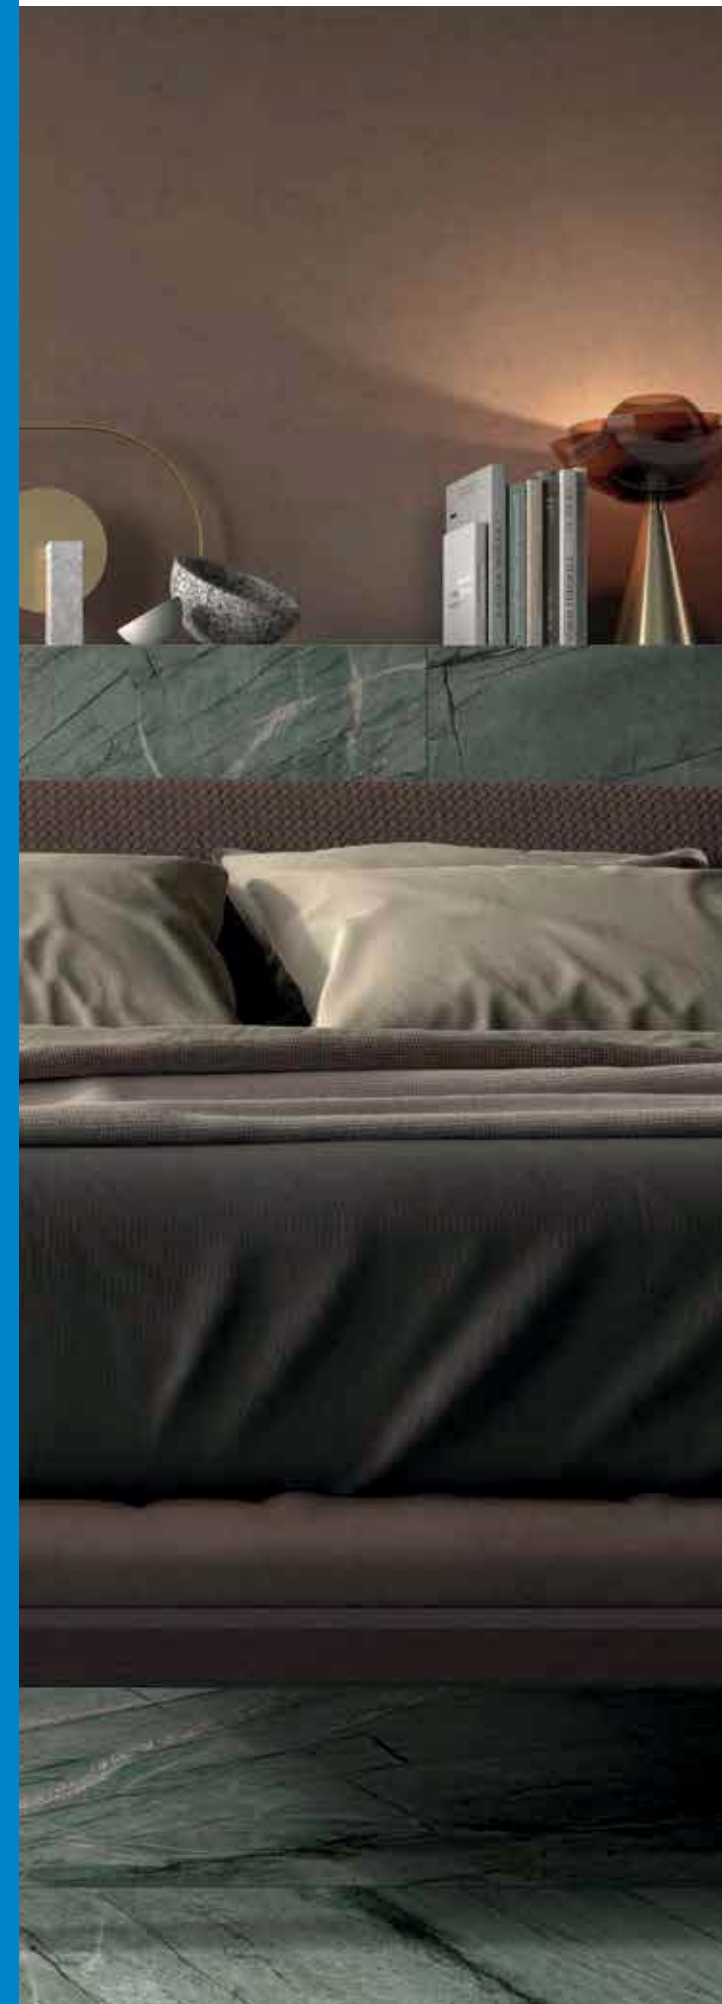








TIFFANY GREEN


COLOR BODY PORCELAIN TILE



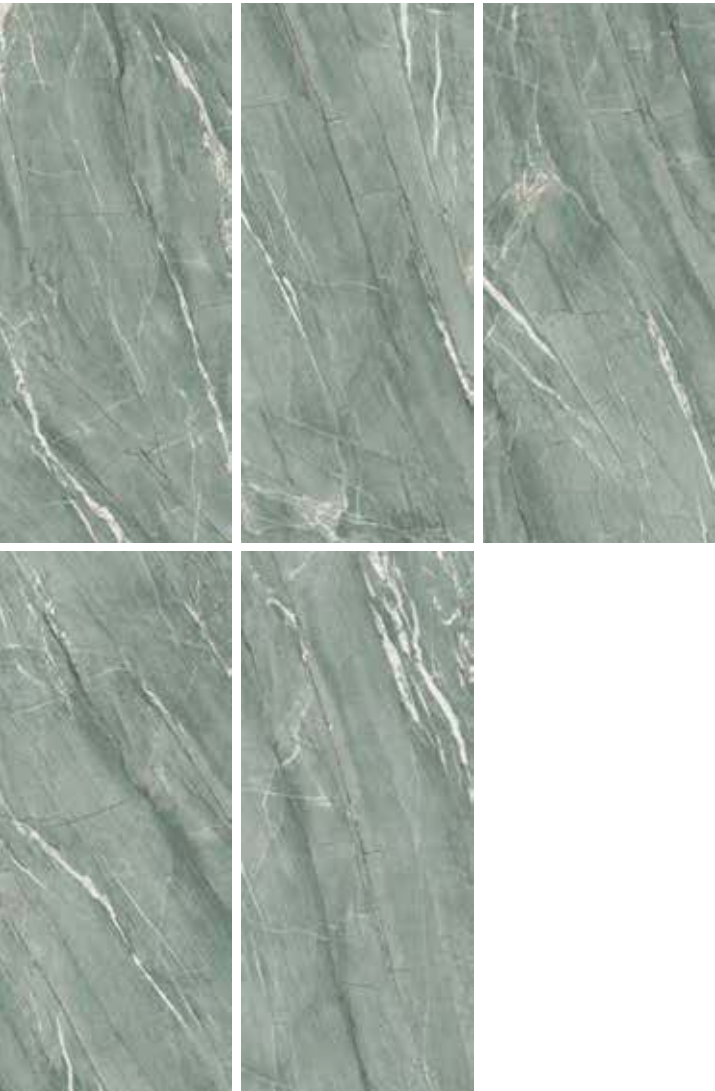

5 grafiche differenti / 5 different graphics

TIF GR

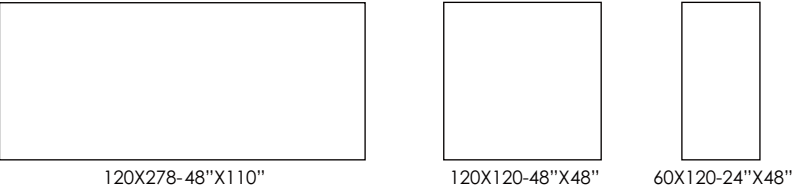

	TIF GR6 278 LP 188080	TIF GR6 120 LP 186852	TIF GR6 12 LP 186856
	TIF GR6 278 LPM 188134	TIF GR6 120 LPM 186876	TIF GR6 12 LPM 186880

COLOR BODY PORCELAIN TILE

6x120
2.4''x48''







OXG

PAZ

VEN

COL

AE OXG6BT120LPM
194526

AE PAZ6BT120LPM
194527

AE VEN6BT120LPM
194528

AE COL6BT120LPM
194525

AE OXG6 BT120LP
194530

AE PAZ6 BT120LP
194531

AE VEN6 BT120LP
194532

AE COL6 BT120LP
194529

CARATTERISTICHE TECNICHE SPECIFICHE - TECHNICAL FEATURES SPECIFICATIONS

DIN EN 16165 Annex B / DIN 51130 (R)	DIN EN 16165 Annex A / DIN 51097 (A+B+C)	B.C.R. DM 14/6/89 N. 236		PENDULUM BS EN16165 Annex C / BS7976 (INGLESE)	PENDULUM AS/NZS 4856 (AUSTRALIANO)	PENDULUM UNE 41901 / 12633 (SPAGNOLO)	BOT 3000 (DCOF) ANSI 326.3 (AMERICANO)
		c.a.	g.b.				
R9	A	>0,4	>0,4	>25	P2	1	>0,42

PACKING

NOMINAL SIZE		THICKNESS	BOX			PALLET		
			PZ/PCS	MQ/SM	KG	BOX/BOXES	MQ/SM	KG
60x120 - 24"x48"	rectified	6,5	4	2,88	46,56	16	46,08	764,91
120x120 - 48"x48"	rectified	6,5	2	2,88	46,49	30	86,40	1414,8
120x278 - 48"x110"	rectified	6,5	1	3,336	53,00	20	66,72	21080,00

Technical Specifications Porcelain Stoneware

UNI EN 14411 (ISO 13006) - Bla (appendice/appendix G)

Specification		Test methods	Requirements in accordance to the standards		Average value		
	DIMENSIONS AND APPEARANCE	ISO 10545-2	PROSPECT G.1		COMPLIANT		
	WATER ABSORPTION	ISO 10545-3	≤ 0,5%		< 0,1%		
	FLEXURAL RESISTANCE	ISO 10545-4	min. 35 N/mm ²		> 45 N/mm ²		
	MODULUS OF RUPTURE		THICKNESS ≥ 7,5 mm: min. 1300 N		THICKNESS*	6,5 mm	1800 N*
			THICKNESS < 7,5 mm: min. 700 N				
	DEEP ABRASION RESISTANCE	ISO 10545-6	≤ 175 mm ³		< 140 mm ³		
	(α) LINEAR EXPANSION THERMIC COEFFICIENT	ISO 10545-8	AVAILABLE ON REQUEST		≤ 7x10 ⁻⁶ °C ⁻¹		
	RESISTANCE TO SUDDEN TEMPERATURE CHANGES	ISO 10545-9	AVAILABLE ON REQUEST		RESISTANT		
	FROST RESISTANCE	ISO 10545-12	ALWAYS TESTED		RESISTANT		
	HOUSEHOLD CHEMICALS AND SWIMMING POOL WATER CLEANSERS	ISO 10545-13	min. B		min. B		
	ACIDS AND LOW CONCENTRATION ALKALIS		FROM LA, LB TO LC / DE LA, LB A LC		FROM LA, LB TO LC / DE LA, LB A LC		
	ACIDS AND HIGH CONCENTRATION ALKALIS		AVAILABLE ON REQUEST		AVAILABLE ON REQUEST		
	UGL STAIN RESISTANCE UGL	ISO 10545-14	AVAILABLE ON REQUEST		AVAILABLE ON REQUEST		
	STAIN RESISTANCE GL		min. 3		min. 3		

* VALUES REFERRED TO 60X60 SIZE

INDICATIONS FOR USE FLOOR TILES



WALL TILES

SUGGESTED APPLICATIONS



DOMETISC PURPOSE



TILES FOR LIGHT COMMERCIAL



RETAIL

FINISH



NATURAL



*POLISHED



*HONED

FINISH



MATTE



SATIN



GLOSSY

EDGE



MONOCALIBER, RECTIFIED

SHADE VARIATION












SALES CHARACTERISTICS Product sold per item

All our products are sold only in complete boxes, whether the unit of measure is per item or per square metre.

* Surfaces with a honed polished finish are recommended for any kind of wall tile, residential floor or floors that are not directly connected with the outdoors or whose entrances are protected by mats.

SPECIAL PIECES

					
					
6X120-2.4''X48''  		6X120-2.4''X48''  		6X120-2.4''X48''  	
	CAL PI6 BT120 194447		CAL PI6 BT120LP 194439		CAL PI6 BT120LPM 194435
	MON BL6 BT120 194448		MON BL6 BT120LP 194440		MON BL6 BT120LPM 194436
	TIF GR6 BT120 188549		TIF GR6 BT120LP 188528		TIF GR6BT120LPM 188563
	IRI GR6 BT120 194450		IRI GR6 BT120LP 194442		IRI GR6 BT120LPM 194438

PACKAGING

FORMATO NOMINALE NOMINAL SIZE	BORDO EDGE	SPESSORE THICKNESS	BOX			PALLET		
			PZ/BOX PCS/BOX	MQ/BOX SM/BOX	KG/BOX KG/BOX	BOX/PALLET BOXES/PALLET	MQ/PALLET SM/PALLET	KG/ R/PALLET KG/PALLET
120X278-48''X110''	RECTIFIED	6,5	1	3,336	54,53	20	66,72	1110,6
120X120-48''X48''	RECTIFIED	6,5	2	2,88	46,26	30	86,40	1408,05
60X120-24''X48''	RECTIFIED	6,5	4	2,88	46,18	16	46,08	758,8

TECHNICAL FEATURES SPECIFICATIONS

DIN EN 16165 Annex B (DIN 51130) (R)	DIN EN 16165 Annex A (DIN 51097) (A+B+C)	BCR DM 14/6/89 N. 236		PENDULUM TEST BS (Inglese)	PENDULUM TEST AS/NZS 4856:2004 (AUSTRALIANO)	PENDULUM TEST UNE ENV 12633:2003 (SPAGNOLO)	BOT 3000 (DCOF)
		C.A.	G.B.				AVERAGE VALUE
R9	A	>0.4	>0.4	>25	P2	1	>0,42

Technical Specifications Porcelain Stoneware

UNI EN 14411 (ISO 13006) - Bla (appendix G)

	Specification	Test methods	Requirements in accordance to the standards	Average value
	DIMENSIONS AND APPEARANCE	ISO 10545-2	PROSPECT G.1	COMPLIANT
	WATER ABSORPTION	ISO 10545-3	≤ 0,5%	< 0,1%
	FLEXURAL RESISTANCE		min./35 N/mm²	> 45 N/mm²
		ISO 10545-4	THICKNESS ≥ 7,5 mm: min. 700 N	
	MODULUS OF RUPTURE		THICKNESS < 7,5 mm: min. 1300 N	THICKNESS* 6,5 mm1800 N*
	DEEP ABRASION RESISTANCE	ISO 10545-6	≤ 175 mm³	< 140 mm³
	(α) LINEAR EXPANSION THERMIC COEFFICIENT	ISO 10545-8	AVAILABLE ON REQUEST	≤ 7x10 ⁻⁶ °C ⁻¹
	RESISTANCE TO SUDDEN TEMPERATURE CHANGES	ISO 10545-9	AVAILABLE ON REQUEST	RESISTANT
	FROST RESISTANCE	ISO 10545-12	ALWAYS TESTED	RESISTANT
	HOUSEHOLD CHEMICALS AND SWIMMING POOL WATER CLEANSERS		min. B	min. B
	ACIDS AND LOW CONCENTRATION ALKALIS	ISO 10545-13	DA LA, LB A LC FROM LA, LB TO LC / DE LA, LB A LC	DA LA, LB A LC FROM LA, LB TO LC / DE LA, LB A LC
	ACIDS AND HIGH CONCENTRATION ALKALIS		AVAILABLE ON REQUEST	AVAILABLE ON REQUEST
	STAIN RESISTANCE UGL		AVAILABLE ON REQUEST	AVAILABLE ON REQUEST
	STAIN RESISTANCE GL	ISO 10545-14	min. 3	min. 3

*VALUES REFERRED TO 60X60 SIZE

Symbols

INDICATIONS FOR USE	SHADE VARIATION
 Floor tiles	
 Wall tiles	
SUGGESTED APPLICATIONS	THICKNESS
 Dometisc purpose	
 Light traffic area	
 Retail	PACKING
	
SURFACES	SALES CHARACTERISTICS
Structure	 Product sold per item.
Finish	All our products are sold only in complete boxes, whether the unit of measure is per item or per square metre.
 Natural	
 Polished	
 Honed	
 Polished Kristall	
Surface look	
 Matt	
 Semi-Gloss	
 Glossy	
Edge	
 Monocaliber, rectified	



OUR SHOWROOMS

NEW JERSEY

Dover
Princeton
Wall
West Berlin
Wyckoff

PENNSYLVANIA

Bethlehem
Lancaster
Philadelphia
Warminster

SOUTH CAROLINA

Charleston
Columbia

GEORGIA

Savannah

GARDEN STATE TILE

Together We Can Design For Life

GSTILE.COM    @GARDENSTATETILE1957