

GARDEN STATE TILE

Together We Can Design For Life

OAKBRICKS





Oakbricks Natural



Oakbricks Biurnt




Oakbricks Honey



Oakbricks Birch

Birch

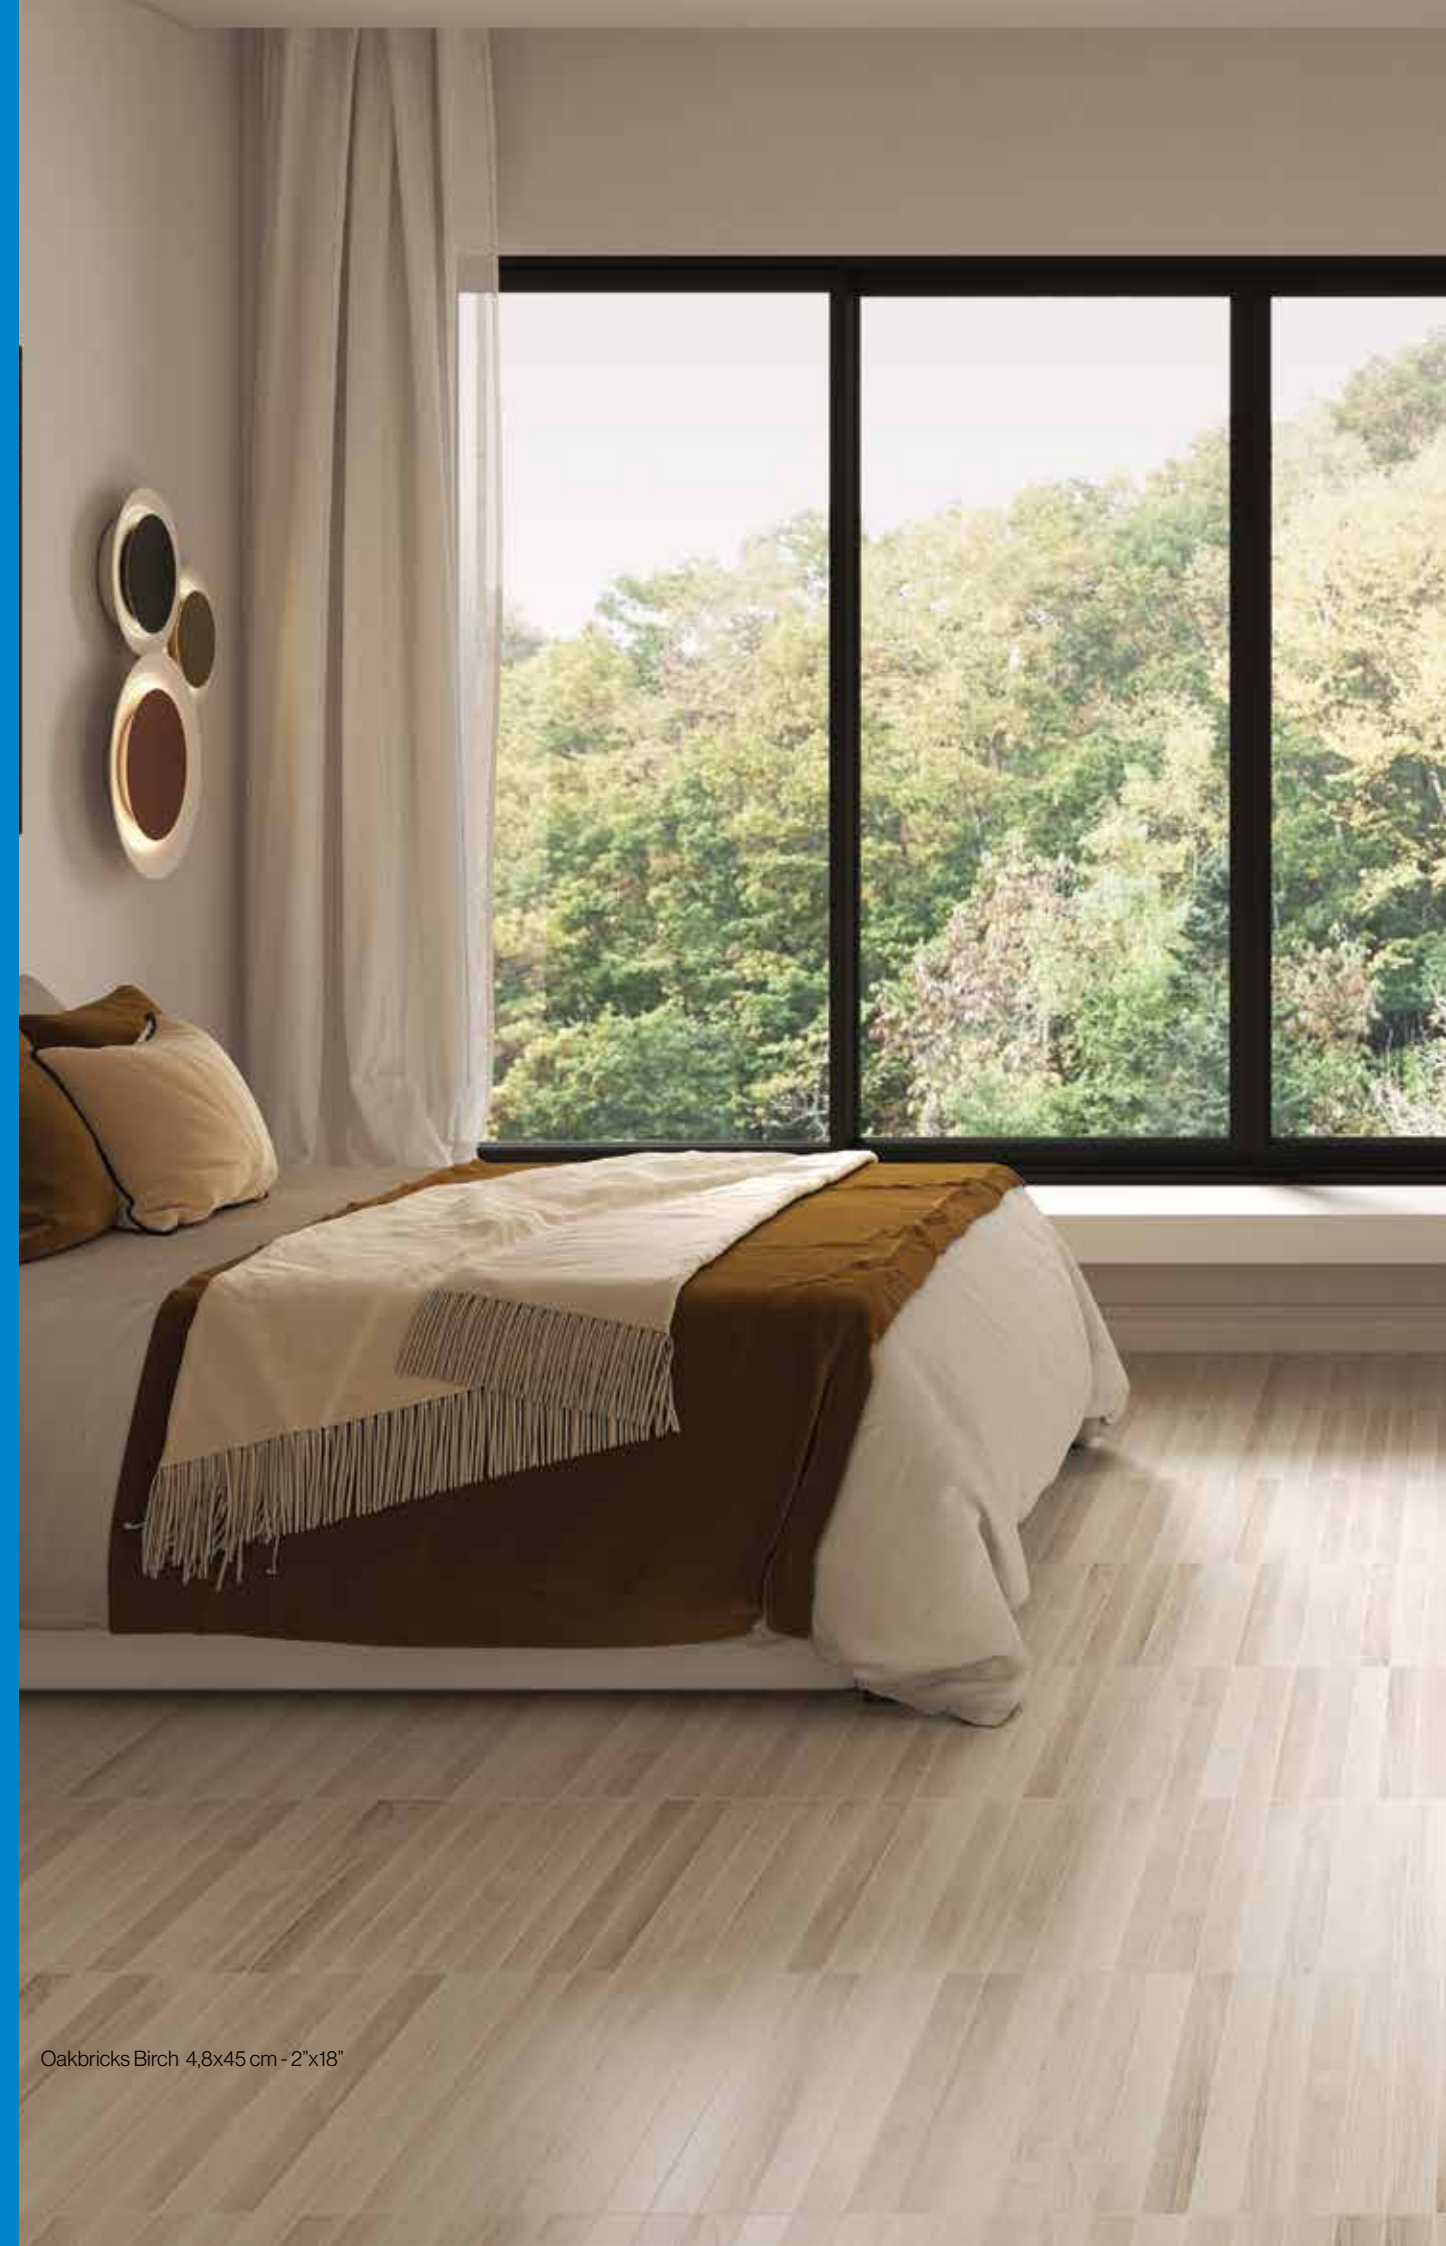

Oakbricks Birch 4,8x45 cm - 2"x18"

Birch recreates the elegant texture of wood with fine, smooth veining that gives a light, natural feel. The delicate shades range from light beige to creamy white, with slight grey tones, capturing the bright and warm appearance of natural wood. A velvety touch reminiscent of smoothed wood, but with the strength and practicality of porcelain stoneware.



Oakbricks Birch 4,8x45 cm - 2"x18"



Oakbricks Birch 4,8x45 cm - 2"x18"

Oakbricks Birch 4,8x45 cm - 2"x18"



Oakbricks Natural 4,8x45 cm - 2"x18"

Natural



Oakbricks Natural 4,8x45 cm - 2"x18"




Oakbricks Natural faithfully reproduces the rich texture of oak wood. Characterised by pronounced veining and knotty details, the strips evoke the authenticity and robustness of solid wood, with a hue that recalls the natural finish of the material, offering a tactile effect that restores the warm feel of oak.



Oakbricks Natural 4,8x45 cm - 2"x18"

Honey

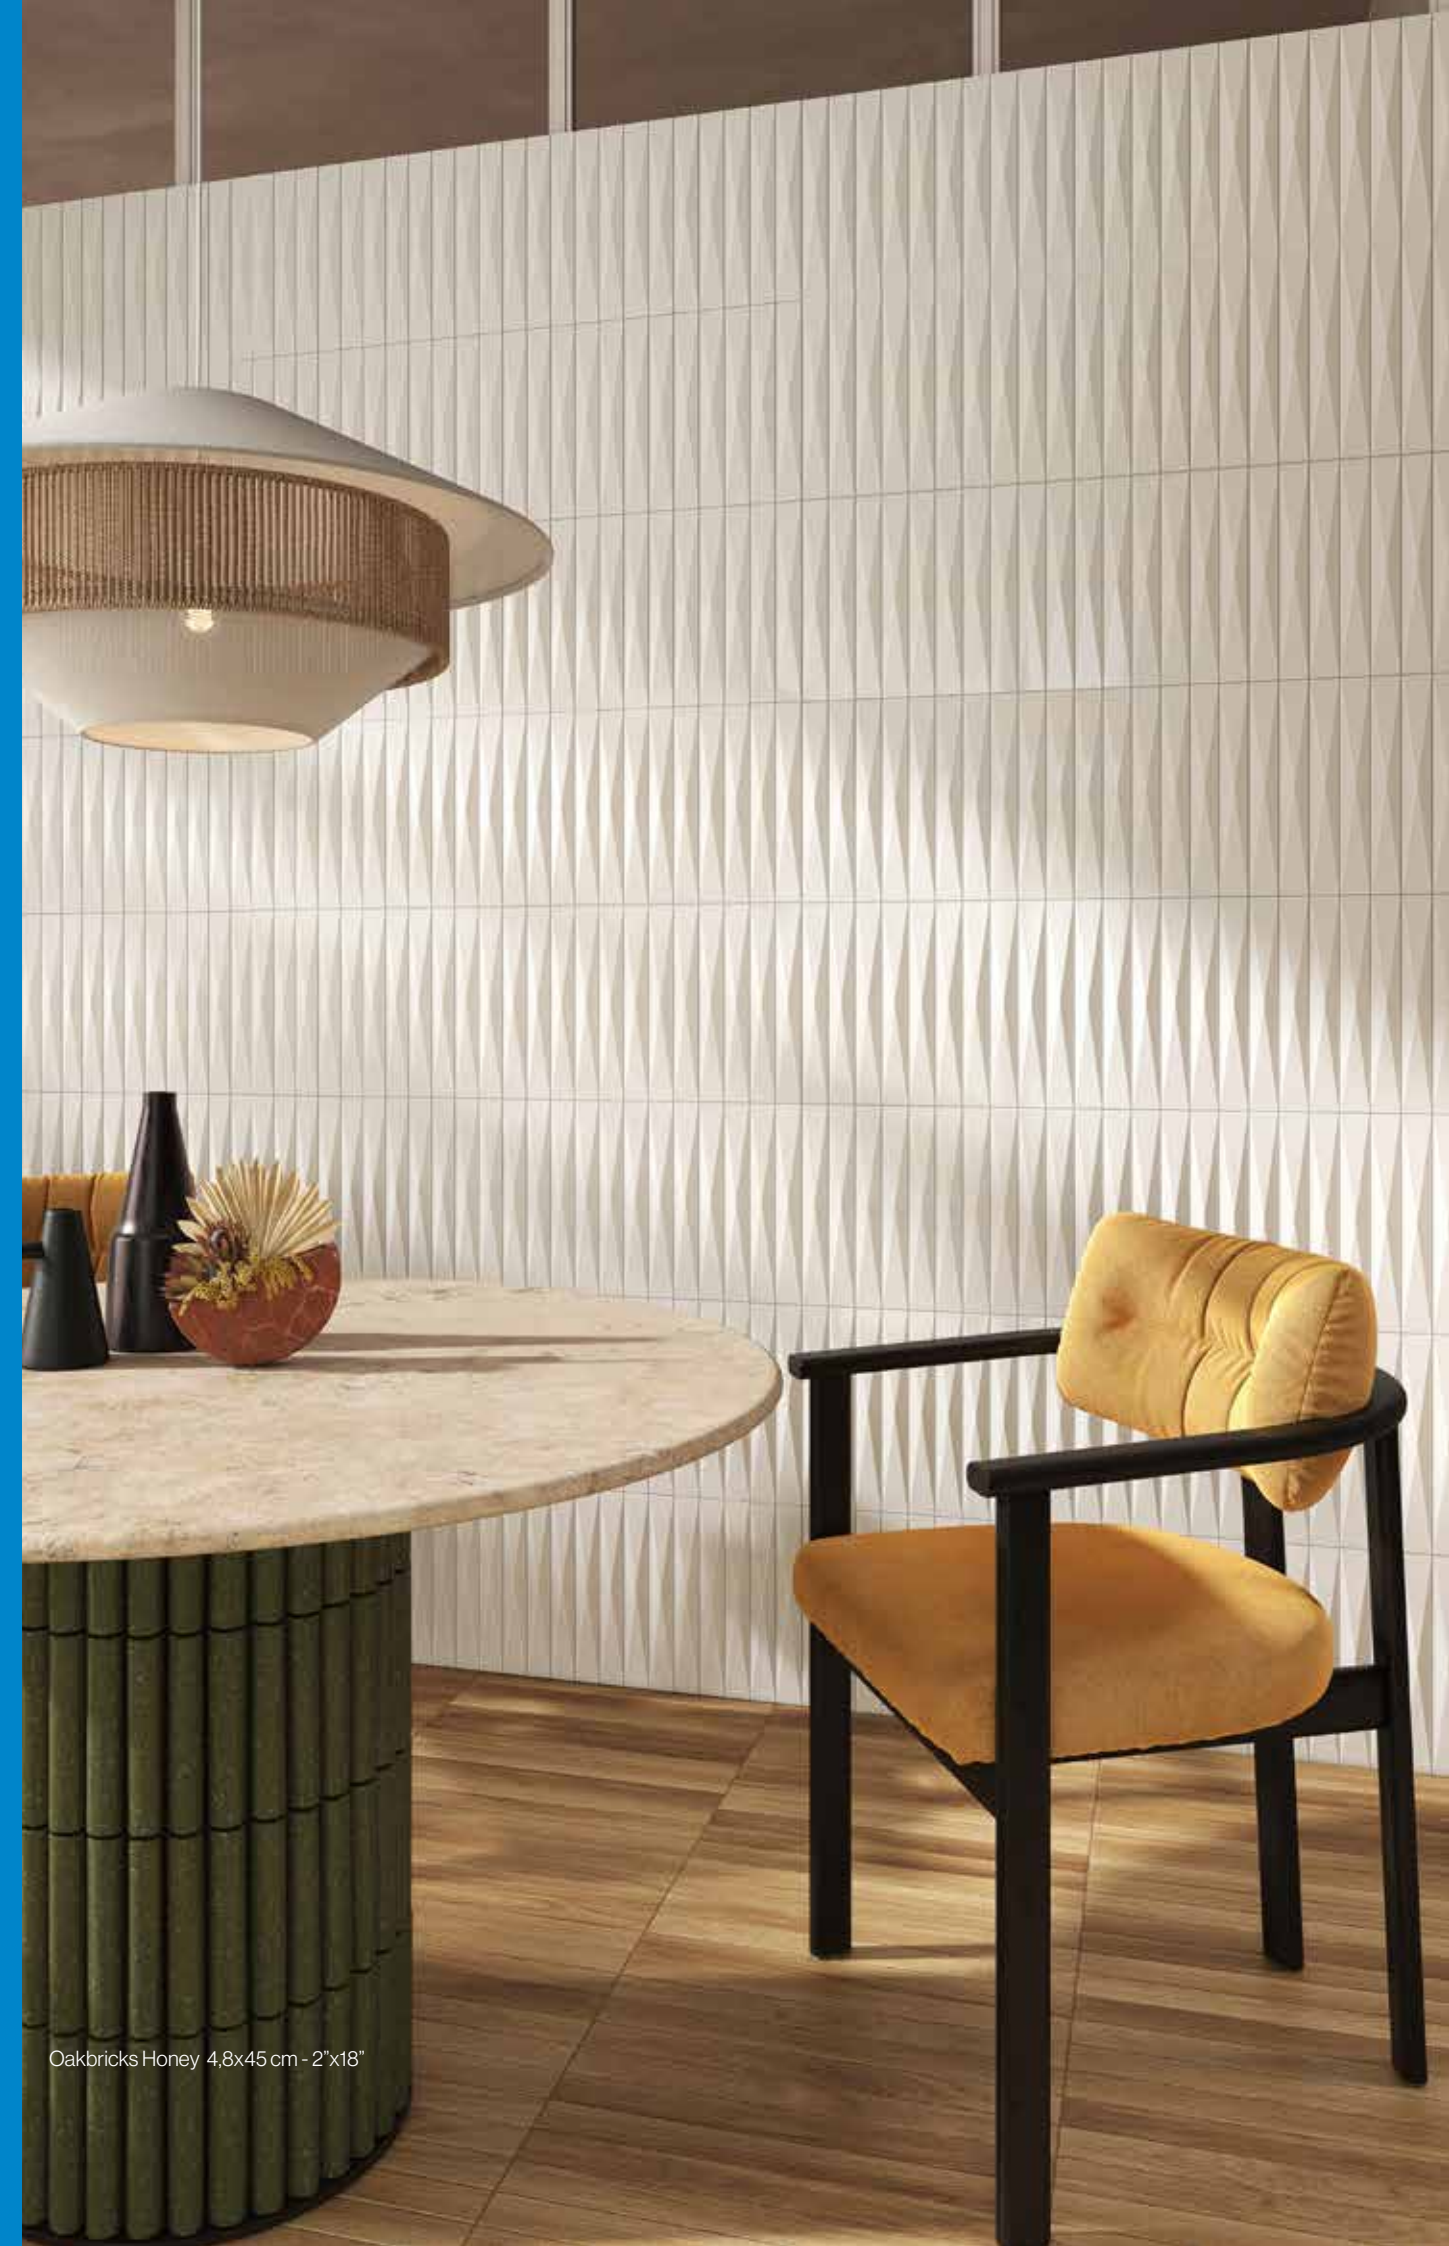

Oakbricks Honey 4,8x45 cm - 2"x18"



Oakbricks Honey 4,8x45 cm - 2"x18"

Honey is a soft, bright shade that recalls wood in sunlight, with a slightly amber effect that enhances the veining and natural details of the material. Honey accentuates the depth of the wood, giving a cosy and harmonious feel, ideal for spaces that aim for a warm and sophisticated aesthetic without losing the rustic and authentic charm of wood.

Walnut



Oakbricks Walnut 4,8x45 cm - 2"x18"



Walnut reproduces the rich tones and natural veining of the wood of inspiration. A deep brown colour enhanced by veining gives the surface an authentic look. The texture adds warmth and a touch of luxury without sacrificing the durability and practicality of porcelain stoneware.

Oakbricks Brown 4,8x45 cm - 2"x18"



Brown




The realistic reproduction of the dignity of wood in the new 4.8x45 cm size offers the perfect flexibility for both traditional and innovative solutions, allowing even small areas to be covered with ease. The warm and enveloping Brown shade lends movement and realism to the surface, with the visual rendering of a mature wood offering warmth and sophistication to rooms.



Oakbricks Brown 4,8x45 cm - 2"x18"

Burnt

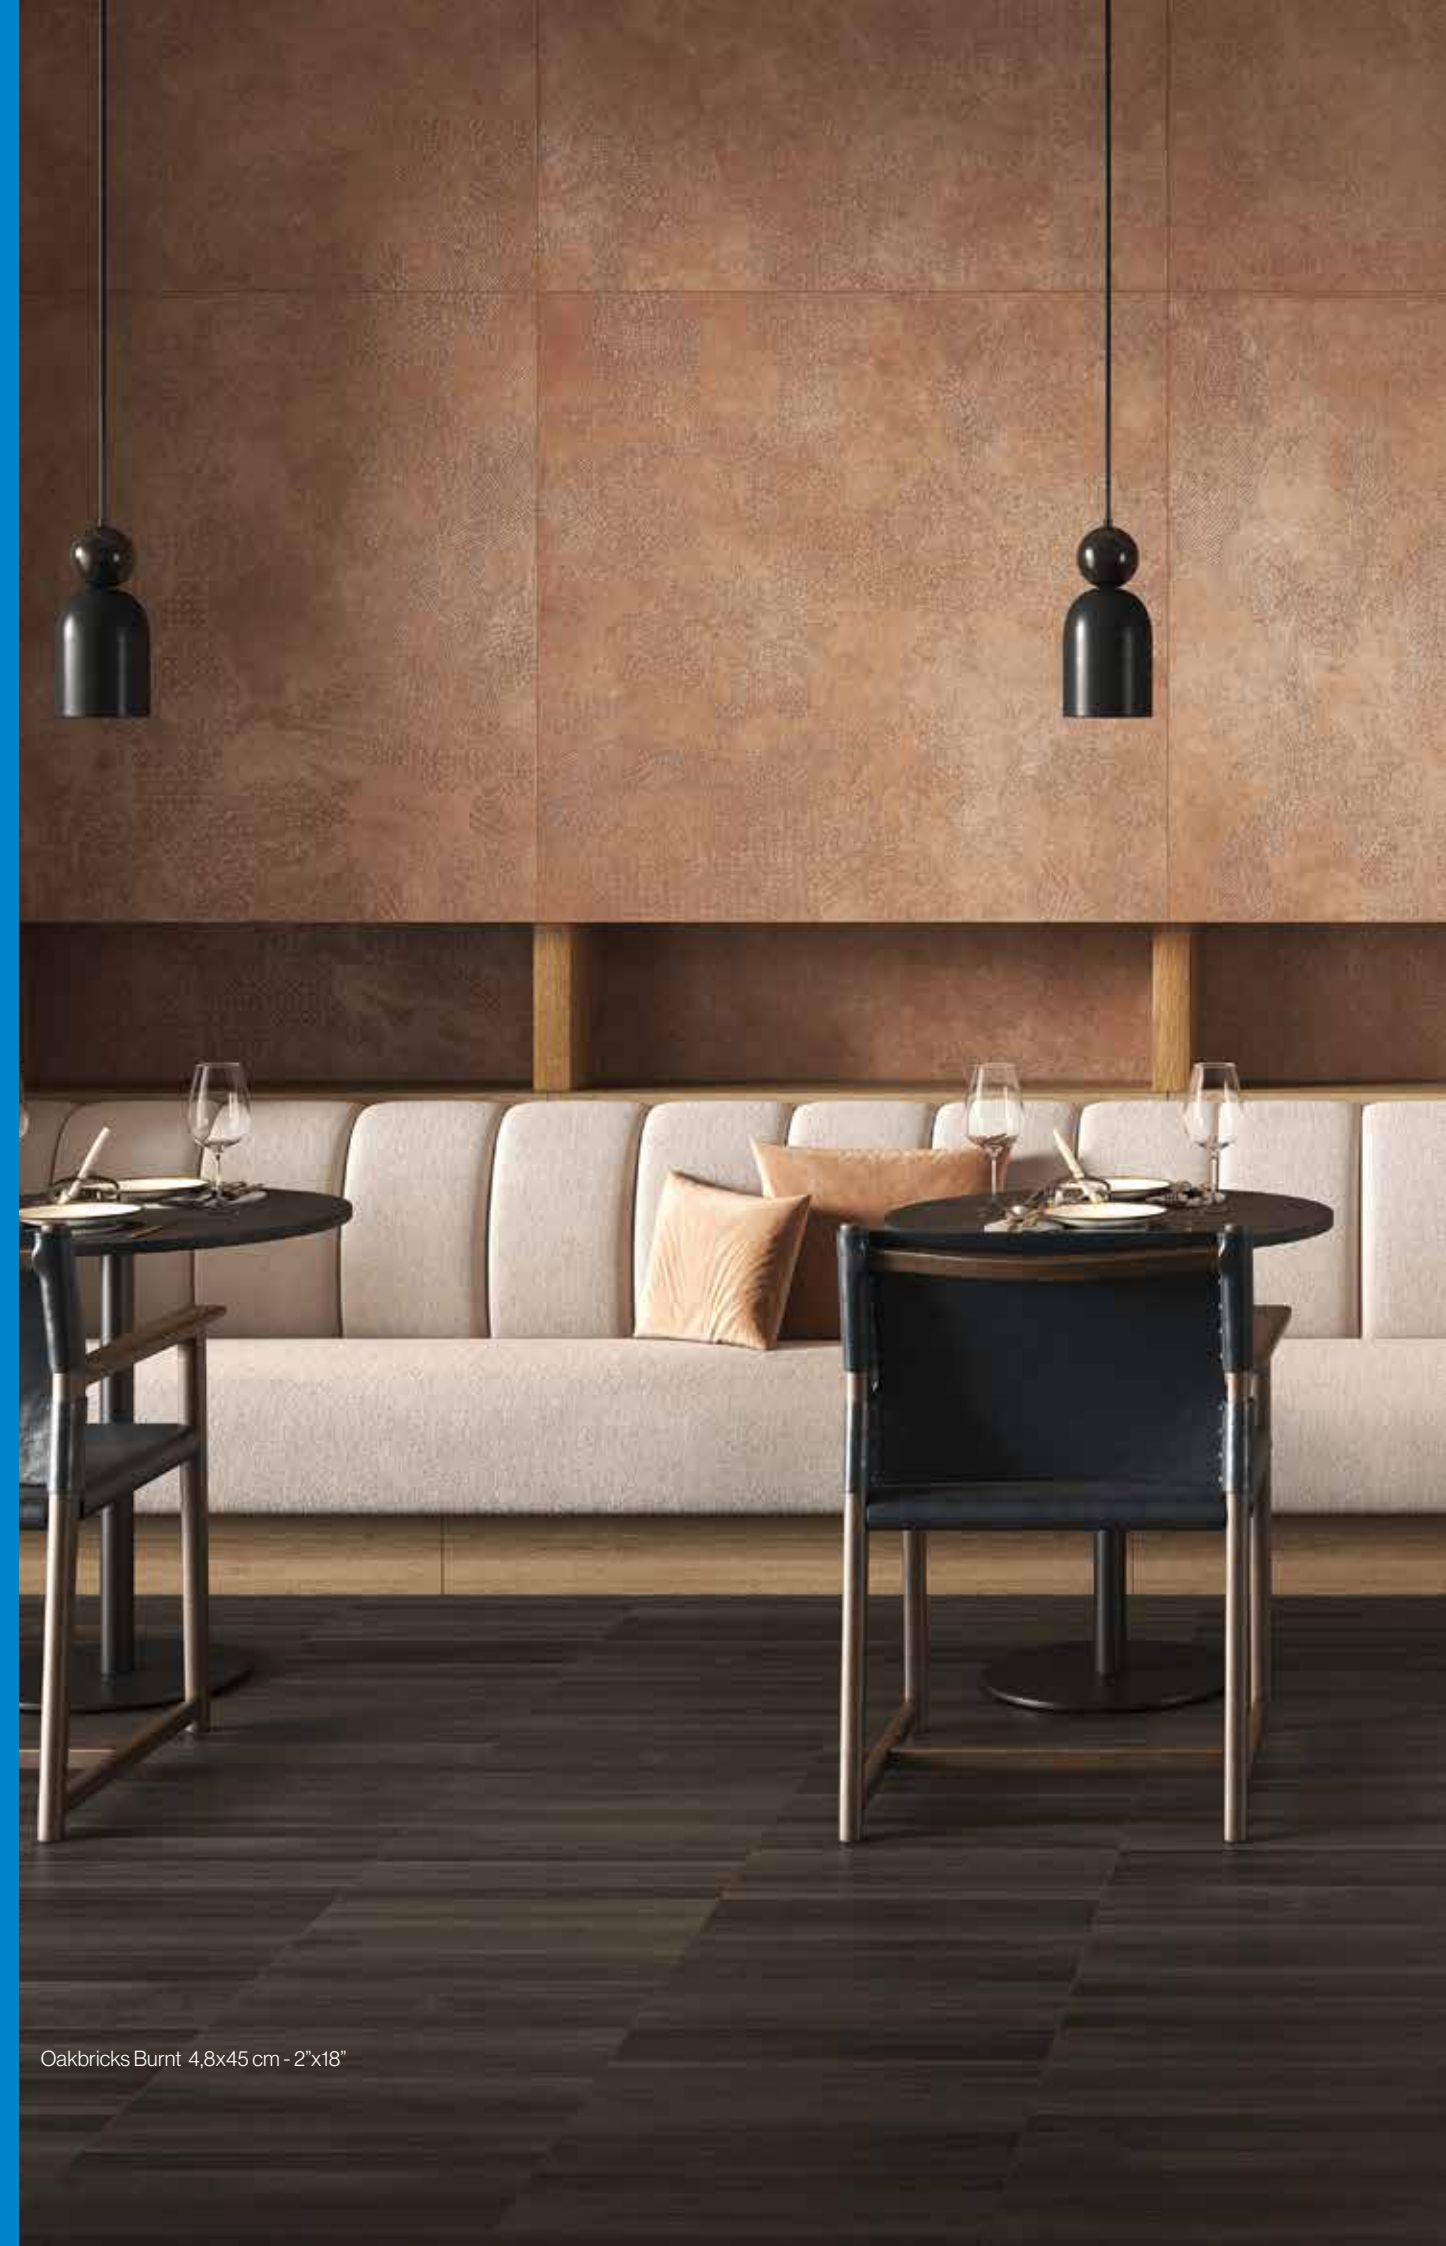

Oakbricks Burnt 4,8x45 cm - 2"x18"



Oakbricks Burnt 4,8x45 cm - 2"x18"

Authentic, warm and technologically innovative, Burnt embodies the essence of wood in every detail, transforming rooms with a touch of character and sophistication. Burnt is distinguished by its characteristic veining and deep tones, designed to bring nature into living spaces.

Graphic development



Birch 4,8x45 - 2"x18"



Natural 4,8x45 - 2"x18"



Honey 4,8x45 - 2"x18"



Walnut 4,8x45 - 2"x18"



Brown 4,8x45 - 2"x18"




Burnt 4,8x45 - 2"x18"

Available size




4,8x45 cm - 2"x18"
matt


Laying schemes

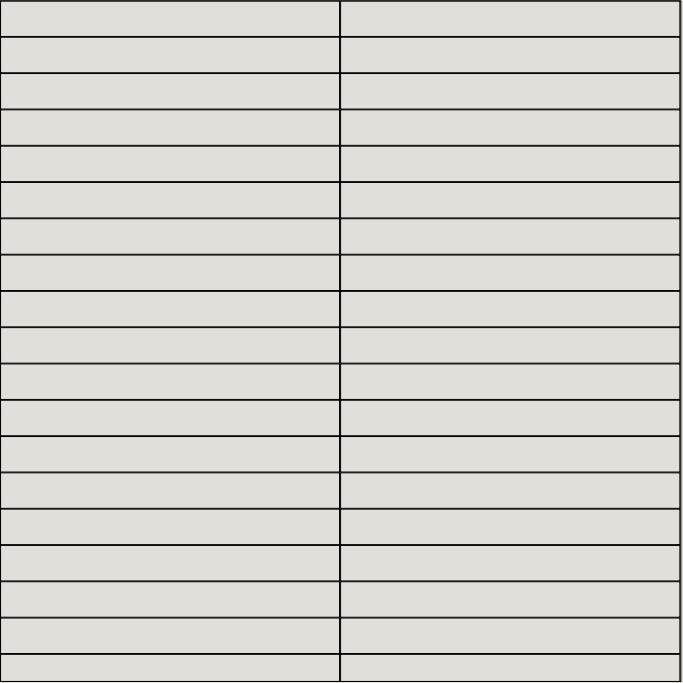


Scheme 1

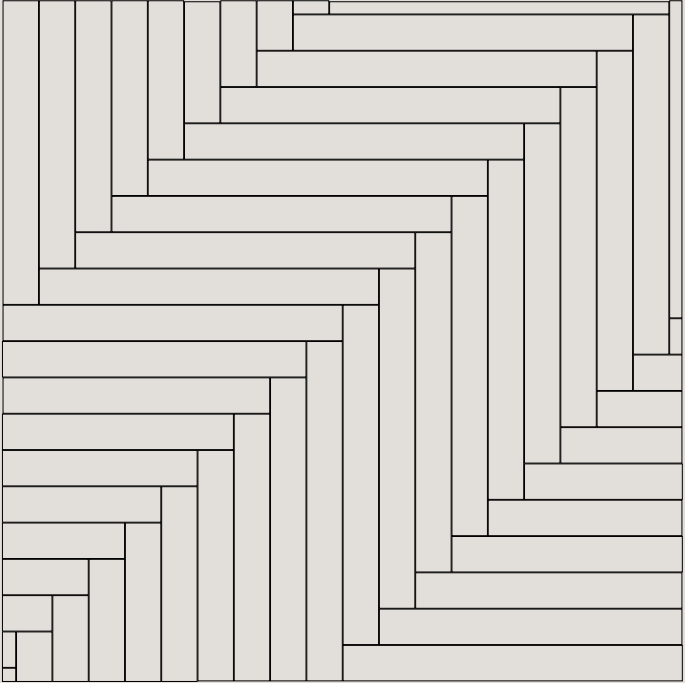

Scheme 2

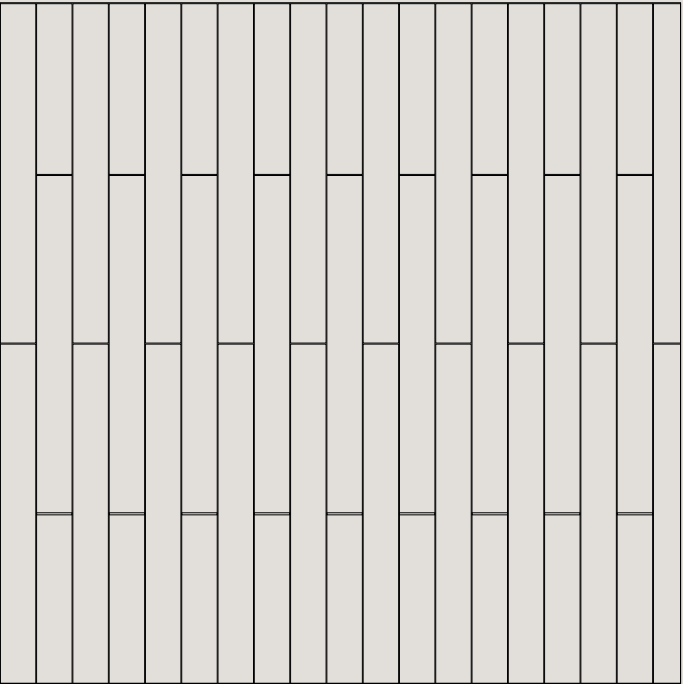

Scheme 3

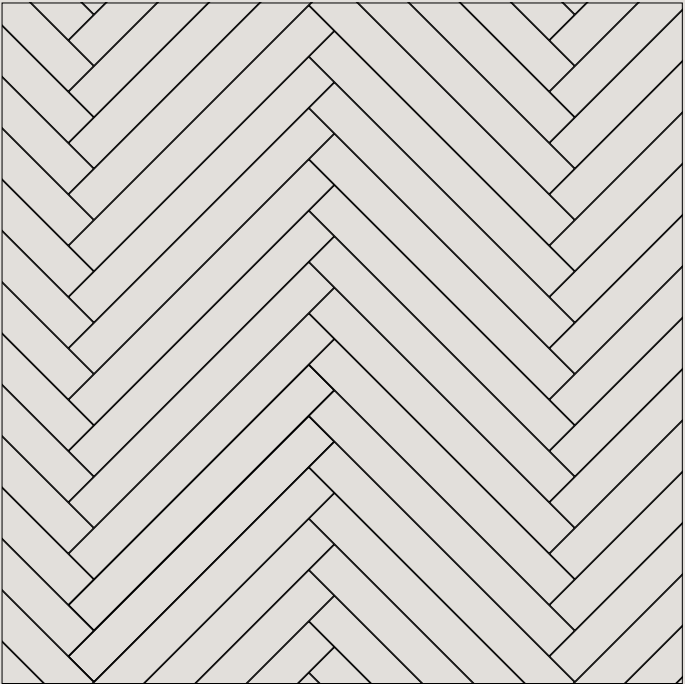

Scheme 4

Oakbricks

Packaging

9,5 MM V3 HIGH

SIZE	BOX			PALLET		
	PCS	SQ.MT.	KG	BOXES	SQ.MT.	KG
4,8x45 cm - 2"x18" matt	32	0,69	13,50	66	45,54	911

TECHNICAL FEATURES GLAZED PORCELAIN TILES Conforming to European Standards EN 14411 ISO 13006
App. G (Gruppo BIA GL con Eb ≤ 0,5%)

	TECHNICAL FEATURES CARATTERISTICHE TECNICHE TECHNISCHE DATEN CARACTERISTIQUES TECHNIQUES	TESTING METHOD METODICA DI PROVA PRÜFVERFAHREN NORME D'ESSAIS	REFERENCE STANDARD RIFERIMENTO NORMA STANDARDWERT RÉFÉRENCE NORME	TEST RESULTS VALORE PRODOTTO PRODUKT WERTE VALEUR PRODUIT	
	Sizes Dimensioni Abmessungen Dimensions	EN ISO 10545-2	N _z 15 cm • Length and width - Lunghezza e larghezza - Länge und Breite Longueur et largeur • Thickness - Spessore - Stärke - Epaisseur • Linearity - Rettilineità spigoli - Kantengeradheit - Rectitude des arêtes • Wedging - Ortogonalità - Rechtwinkligkeit - Orthogonalité • Warpage - Planarità - Ebenfächigkeit - Planarité • Appearance: percentage of acceptable tiles, per lot Aspetto: percentuale di piastrelle accettabili nel lotto Oberflächenbeschaffenheit: Prozentsatz der Fliesen, die den geforderten - Eigenschaften entsprechen Aspect: pourcentage de carreaux acceptables sur la fourniture totale	(%) ±0,6% (mm) ±2,0 ±1,0 ±0,5 ±1,5 ±0,5 ±2,0 ≤5% min. -	Compliant Conforme Erfüllt Conforme
	Water absorption Assorbimento acqua Wasseraufnahme Absorption d'eau	EN ISO 10545-3	E _b ≤ 0,5%		Compliant Conforme Erfüllt Conforme
	Modulus of rupture Resistenza alla flessione Biegezugfestigkeit Résistance à la flexion	EN ISO 10545-4	Medium value 35 N/mm ² min.		Compliant Conforme Erfüllt Conforme
	Breaking strength Carico di rottura Bruchlast Charge de rupture		sp. > = 7,5 mm: min 1300 N		Compliant Conforme Erfüllt Conforme
	Abrasion resistance Resistenza all'abrasione Abriebbeständigkeit Résistance à l'abrasion	EN ISO 10545-6	175 mm ³ max		Average Medio - Mittelwert - Moyenne < 150 mm ³
	Thermal expansion coefficient Coefficiente di dilatazione termica lineare Wärmeausdehnung Coefficient de dilatation thermique linéaire	EN ISO 10545-8	*Declared value Valore dichiarato Angegebener Wert Valeur déclaré		≤9 MK-1
	Thermal shock resistance Resistenza agli sbalzi termici Temperaturwechselbeständigkeit Résistance aux écarts de température	EN ISO 10545-9	*Pass according to iso 10545-1 Test superato in accordo con iso 10545-1 Test ueberstanden nach ISO 10545-1 Pv en accord avec norme en 10545-1		Resistant Resistente Widerstandsfähig Résistant
	Frost resistance Resistenza al gelo Frostbeständigkeit Résistance au gel	EN ISO 10545-12	*Pass according to iso 10545-1 Test superato in accordo con iso 10545-1 Test ueberstanden nach ISO 10545-1 Pv en accord avec norme en 10545-1		Resistant Resistente Widerstandsfähig Résistant
	Resistance to low concentrations of acids and alkali Resistenza a basse concentrazioni di acidi e alcali Beständigkeit gegen schwach konzentrierte Säuren und Laugen Résistance à des basses concentrations d'acides et bases	EN ISO 10545-13	*Pass according to iso 10545-1 Test superato in accordo con iso 10545-1 Test ueberstanden nach ISO 10545-1 Pv en accord avec norme en 10545-1		From GLA to GLB Da GLA a GLB Von GLA bis GLB De GLA jusqu'à GLB
	Resistance to high concentrations of acids and alkali Resistenza ad alte concentrazioni di acidi e alcali Beständigkeit gegen stark konzentrierte Säuren und Laugen Résistance à des hautes concentrations d'acides et bases		*Pass according to iso 10545-1 Test superato in accordo con iso 10545-1 Test ueberstanden nach ISO 10545-1 Pv en accord avec norme en 10545-1		From GHA to GHB Da GHA a GHB Von GHA bis GHB De GHA jusqu'à GHB
	Resistance to domestic chemicals and additives for swim-ming pools - Resistenza ai prodotti chimici di uso domestico e agli additivi per piscina Beständigkeit gegen chemische Haushaltsreiniger und Zusatzstoffe für Schwimmbäder Résistance aux prod. chimiques d'usage domestique et additifs pour piscines		GB min.		GA
	Stain resistance of unglazed porcelain Resistenza alle macchie di piastrelle non smaltate Fleckenbeständigkeit von unglasierten Fliesen Résistance aux taches des carreaux non émaillés	EN ISO 10545-14	*Pass according to iso 10545-1 Test superato in accordo con iso 10545-1 Test ueberstanden nach ISO 10545-1 Pv en accord avec norme en 10545-1		CLASS 5
	Colors resistance to light Resistenza dei colori alla luce Lichtbeständigkeit Résistance des couleurs a la lumière	DIN 51094	No noticeable color change - Non devono presentare apprezzabili variazioni di colore - Die Muster dürfen keine sichtbaren Farbveränderungen aufweisen - Ne doivent pas présenter de variations importantes des couleurs.		No alteration after testing Materiale inalterato dopo il test Keine Veränderung nach dem Test Aucune altération relevée
	Friction coefficient (Slipperiness) Coefficiente di attrito (Scivolosità) Reibungskoeffizient (Schlupfrigkeit) Coefficient de friction (Glissement)	DIN EN 16165 Annex B	*Pass according to iso 10545-1 Test superato in accordo con iso 10545-1 Test ueberstanden nach ISO 10545-1 Pv en accord avec norme en 10545-1		R10* matt
		ANSI A137.1 (DCOF)			>0,42 matt

* Si raccomanda di consultare Contract Division per le indicazioni necessarie al corretto utilizzo.
It's advisable to refer Contract Division for all necessary guidelines to a correct use.
Zur korrekten Anwendung wird empfohlen unsere Contract Division zu kontaktieren.
Merci de consulter notre Contract Division pour les indications à un usage correct.



OUR SHOWROOMS

NEW JERSEY

Dover
Princeton
Wall
West Berlin
Wyckoff

PENNSYLVANIA

Bethlehem
Lancaster
Philadelphia
Warminster

SOUTH CAROLINA

Charleston
Columbia

GEORGIA

Savannah

GARDEN STATE TILE

Together We Can Design For Life

GSTILE.COM    @GARDENSTATETILE1957