



CLEVE™

Porcelain Stone®



CROSSVILLE®

CLEVE™

Porcelain Stone®

Cleve™ captures the sculpted beauty of quartzite in a refined porcelain surface. Its layered veining, crystalline detail, and high variation (V4) bring natural drama and depth, while its four versatile colorways offer timeless options for any design.

Available in three field tile formats, two mosaics (including a new, modern hex), and complete trim, Cleve adapts seamlessly across residential and commercial spaces, from intimate rooms to expansive lobbies. The collection also features Crossville's exclusive **FeatherSoft™ finish**, pairing a smooth matte feel with soft reflectivity and underfoot comfort.

Unlike natural stone, Cleve is cost-effective, low maintenance, and sustainable, delivering the allure of quartzite with the enduring benefits of porcelain. Strong, versatile, and refined, it's a collection **sculpted by nature, perfected in porcelain.**

- Rectified field tiles
- Features Crossville's proprietary FeatherSoft™ finish
- 2x4 Stacked and 8-pc Mod-Hex mosaics available
- Recommended grout joint: 3mm
- Made in the USA





COLOR PALETTE

Available Colors



CLV01 ▶ Ivory Ridge



CLV02 ▶ Strata Beige



CLV03 ▶ Shadow Glen



CLV04 ▶ Iron Hollow



Available Mosaics



CLV01.10204FMOS
Ivory Ridge
2 x 4 Stacked Mosaic



CLV02.10204FMOS
Strata Beige
2 x 4 Stacked Mosaic



CLV03.10204FMOS
Shadow Glen
2 x 4 Stacked Mosaic



CLV04.10204FMOS
Iron Hollow
2 x 4 Stacked Mosaic



CLV01.1MHXFMOS
Ivory Ridge
8-pc Mod-Hex Mosaic



CLV02.1MHXFMOS
Strata Beige
8-pc Mod-Hex Mosaic



CLV03.1MHXFMOS
Shadow Glen
8-pc Mod-Hex Mosaic



CLV04.1MHXFMOS
Iron Hollow
8-pc Mod-Hex Mosaic



Floor: CLV03 ► Shadow Glen 24x24 FST

Wall: CLV03 ► Shadow Glen 2x4 Stacked Mosaic FST











SPECIFICATIONS

Sizes

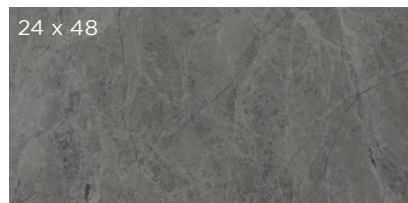

2 x 4 Stacked Mosaic
Mounted on a
296.9 x 296.9 sheet
(coverage area 0.98sf)



8-pc Mod-Hex Mosaic
Mounted on a
255 x 296.5 sheet
(coverage area 1.08sf)



4 x 24 Single Bullnose



6 x 12 Cove Base

Get Planked!

Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment. See website for more details and sizes.



Sizes & Finishes

Field Tile - Rectified

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
12 x 24	297 x 597	9.5	3	FST
24 x 24	597 x 597	9.5	3	FST
24 x 48	597 x 1197	10.5	3	FST

Note: Field tile is rectified with a 3mm grout joint

Mosaics

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 4 Stacked Mosaic	296.9 x 296.9*	9.5	2.5	FST
8-pc Mod-Hex Mosaic	255 x 296.5†	9.5	2.2	FST

* Mounted on 12 x 12 sheet (coverage area 0.98sf) † Mounted on 10 x 15 sheet (coverage area 1.08sf)

Coordinating Trim

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
4 x 24 Single Bullnose	97 x 597	9.5	3	FST
6 x 12 Cove Base	150 x 297	9.5	3	UPS

Product Performance

Water Absorption	<0.5%	ASTM (C373)
Breaking Strength	≥ 450 lbf	ASTM (C648)
Bond Strength	> 200 psi	ASTM (C482)
Facial dimension	± 0.10%	ASTM (C499)
Range of Thickness (in)	0.025	ASTM (C499)
Warpage - diagonal	± 0.20%	ASTM (C485)
Wedging	± 0.25%	ASTM (C502)
Frost (Freeze/Thaw) Resistance	Resistant	ASTM (C1026)
Chemical Resistance	Unaffected	ASTM (C650)
Stain Resistance	Class A	ASTM (C1378)
Scratch Hardness	7	(Mohs)
Deep Abrasion	na	ASTM (C1243)
Crazing Resistance	Resistant	ASTM (C424)
Thermal Shock Resistance	Resistant	ASTM (C484)
Visible Abrasion Resistance	na	ASTM (C1027)

Wet Dynamic Coefficient of Friction Range

FST	0.50 - 0.60	ANSI (A326.3)
-----	-------------	---------------

Shade & Texture Index

Cleve has a shade variation of V4.

V1	V2	V3	V4	V1 Uniform appearance
				V2 Slight Variation
				V3 Moderate Variation
				V4 Substantial Variation

This porcelain tile product is produced with a V4 variation. While the colors and/or textures present on a single piece of tile will be indicative of the colors and/or textures to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.

Recommended Use

Cleve is recommended for interior floors, interior walls, countertops, exterior walls, pool waterlines and full linings† in both residential and commercial applications. Cleve is not recommended for exterior horizontal surfaces or exterior paving. See Crossville.com for detailed installation instructions

† Excludes mesh mounted mosaics.

Wet area use for Cleve Mosaics

Crossville® produces the Cleve 2 x 4 mosaic and 8-pc Mod-Hex Mosaic with the FeatherSoft™ (FST) finish. The ANSI A326.3 wet Dynamic COF of Cleve is ≥0.50. Their small sizes ensure frequent grout joints which provides traction and drainage. Crossville cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water and poor surface cleaning. This information is provided so that customers may make a realistic and informed decision when comparing Cleve to other tile products in wet area environments, such as residential/commercial bathrooms, showers, and interior pool decks.

Care and Maintenance

Regular cleaning is the best way to keep Cleve tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed. More information regarding the care and maintenance of Crossville® products is available at Crossville.com.

Our Warranty

Crossville guarantees that it's products will meet or exceed the performance specifications outlined in ANSI A137.1 and in the performance data section of the Crossville general product catalog. For complete details check our website at Crossville.com

Information listed here is subject to change. Please refer to Crossville.com for the latest, most accurate information.

Crossville® Sample Express

Visit the website to learn more:
Crossville.com/Products/Cleve

Loose Tile Samples
Sizes may vary depending on product series
Max. of 4 large field tile per order

Standard Shipping
FedEx Ground

Crossville.com

You'll find comprehensive information about Crossville's entire portfolio of products. You can also learn about the latest styles and trends from industry experts, download detailed care and maintenance instructions for our various products, or browse electronic versions of Crossville's product brochures. So whether you need information about Crossville products or tile in general, please visit us at Crossville.com.

Trade Organizations



Environmentally Aware



CLEVE™

Crossville®
349 Sweeney Drive
Crossville, TN 38555

Phone 931.484.2110
Fax 931.456.2956
E-Mail Crossc@CrossvilleInc.com
Web Crossville.com

Above:
Floor: CLV02 ▶ Strata Beige 24x24 FST and
CLV04 ▶ Iron Hollow 24x24 FST
Wall: CLV02 ▶ Strata Beige 12x24 FST and
CLV04 ▶ Iron Hollow 12x24 FST

On the cover:
Floor: CLV04 ▶ Iron Hollow 12x24 FST
Wall: CLV04 ▶ Iron Hollow Mod-Hex Mosaic FST

LIT-CLV-26

