

GARDEN STATE TILE

Together We Can Design For Life

# CALCEDONIA



## Calcedonia

Calcedonia is a limestone, also known as alabaster marble, which has as a main characteristic combining a thick and dense matter, quite opaque, with a crystalline and sheer translucent.

Calcedonia interprets a rare version of such marble by using extremely clear tones punctuated by the transparency that defined organic drawings.





**48x106 NAT RECT**






**48x48 NAT RECT**





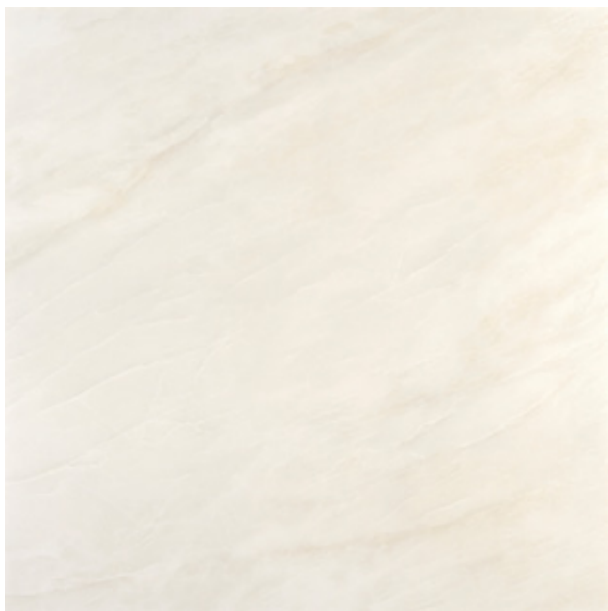

**48x48 POL RECT**






**24x48 POL RECT**





**4x16 GLOSSY PRESSED**

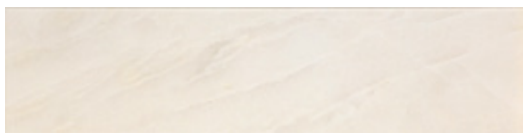


**4x16 MATTE PRESSED**




**Scolpito 4x16 MATTE PRESSED**

Available Sizes


Small Formats / Wall Tile

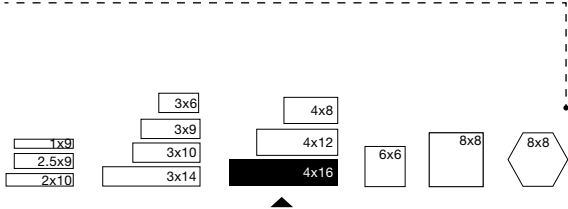

Special Pieces

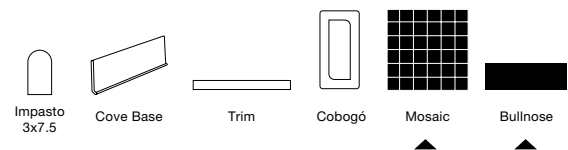

Large Format Wall Tile

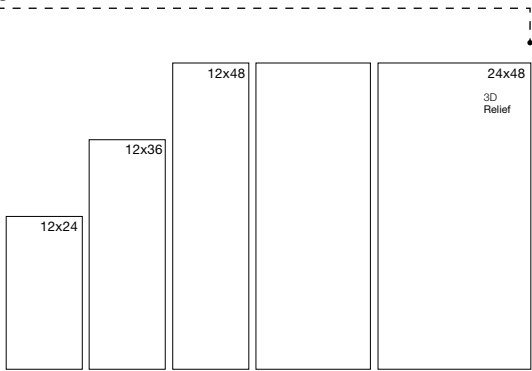


Available Edges

RECTIFIED      PRESSED




Porcelain Tiles

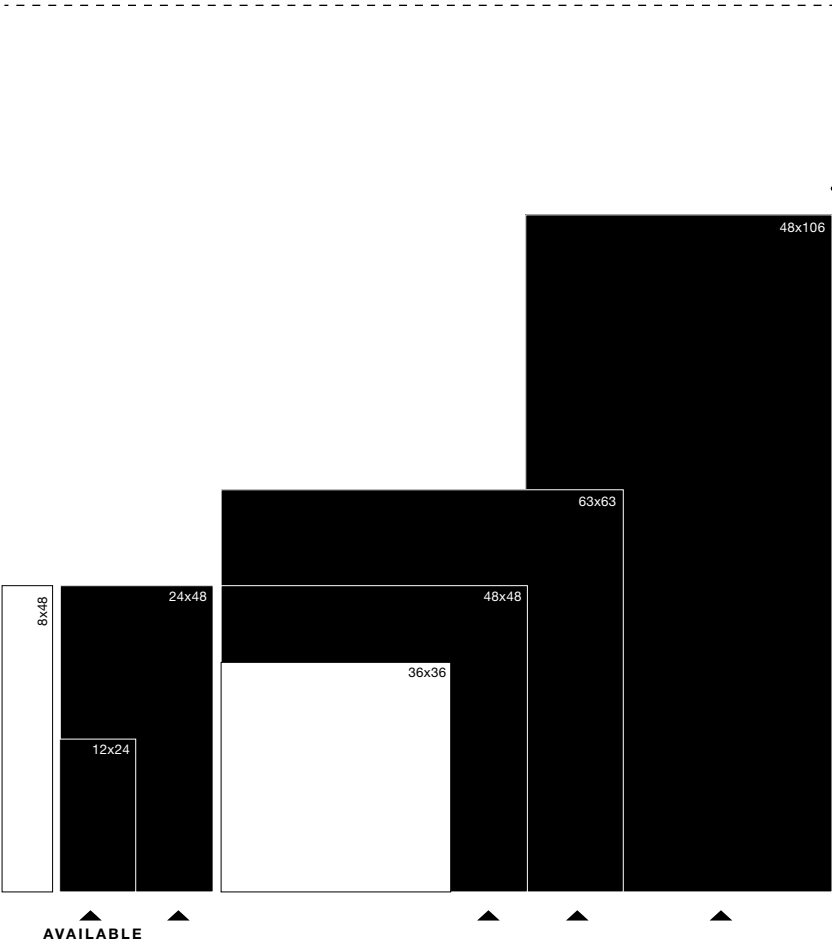

Available Finishes

POLISHED      MATTE      GLOSSY      EXTERIOR      3D RELIEF





# Calcedonia

Color Body Glazed Porcelain Tile | Glazed Ceramic Tile

Calcedonia | V2



| Size     | SKU      | Finishes         |
|----------|----------|------------------|
| 48x106*  | #200004E | NAT RECT         |
| 63x63    | #203277E | NAT RECT         |
| 48x48    | #205803E | NAT RECT         |
|          | #205872E | POL RECT         |
| 24x48    | #900796E | NAT RECT         |
|          | #900771E | POL RECT         |
| 12x24    | #900696E | NAT RECT         |
|          | #900759E | POL RECT         |
| 4X16     | #900693E | MATTE PRESSED *  |
|          | #900694E | GLOSSY PRESSED * |
| 4x16     | #900695E | MATTE PRESSED *  |
| Relief   |          |                  |
| 3x12     | #80659ET | NAT RECT         |
| Bullnose | #80660ET | POL RECT         |

\*Special Order 8-10 week lead time\*

Mos Facets  
1.5x1.5 | V2



Mos Goccia  
1x4 | V2



| Size       | SKU      | Finishes |
|------------|----------|----------|
| 12x12      | #80473ET | NAT      |
| Mos Facets | #80639ET | POL      |
| 10x11      | #80638ET | NAT      |
| Goccia     | #80641ET | POL      |





# Calcedonia

Color Body Glazed Porcelain Tile | Glazed Ceramic Tile

## TECH DATA

|  Finish |  Freeze Resistant |  Shade Variation |  Color Body |  Water Absorption |  Stain Resistant |  DCOF AcuTest |  Chemical Resistant |  Breaking Strength |  Mohs Hardness |
|--------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| NAT                                                                                        | Resistant                                                                                            | V2                                                                                                  | √                                                                                              | ≤ 0.5%                                                                                               | Class A                                                                                             | ≥0.42                                                                                            | Class A                                                                                                | 275 lbf                                                                                               | 7                                                                                                 |
| POL                                                                                        | Resistant                                                                                            | V2                                                                                                  | √                                                                                              | ≤ 0.5%                                                                                               | Class E                                                                                             | <0.42                                                                                            | Class E                                                                                                | ≥275 lbf                                                                                              | 5                                                                                                 |
| 24x48 RELIEF                                                                               | Resistant                                                                                            | V2                                                                                                  | N/A                                                                                            | ≤ 0.5%                                                                                               | Class A                                                                                             | N/A                                                                                              | Class A                                                                                                | ≥275 lbf                                                                                              | 7                                                                                                 |
| MATTE                                                                                      | N/A                                                                                                  | V2                                                                                                  | N/A                                                                                            | ≤ 7%                                                                                                 | Class A                                                                                             | ≥0.42                                                                                            | Class A                                                                                                | ≥250 lbf                                                                                              | 7                                                                                                 |
| GLOSSY                                                                                     | N/A                                                                                                  | V2                                                                                                  | N/A                                                                                            | ≤ 7%                                                                                                 | Class E                                                                                             | N/A                                                                                              | Class E                                                                                                | ≥250 lbf                                                                                              | 5                                                                                                 |

## AREAS OF USAGE

| Classification     | Reference Category | Suitable |
|--------------------|--------------------|----------|
| Interior, Dry      | ID                 | √        |
| Interior, Wet      | IW                 | √ MATTE  |
| Interior, Wet Plus | IW+                | √        |
| Exterior, Wet      | EW                 |          |
| Oils/Greases       | O/G                |          |

## GROUT JOIN

| The recommended grout joint: |              |
|------------------------------|--------------|
| 1/8" RECT                    | 3/6" PRESSED |



## OUR SHOWROOMS

### NEW JERSEY

Dover  
Princeton  
Wall  
West Berlin  
Wyckoff

### PENNSYLVANIA

Bethlehem  
Lancaster  
Philadelphia  
Warminster

### SOUTH CAROLINA

Charleston  
Columbia

### GEORGIA

Savannah

# GARDEN STATE TILE

Together We Can Design For Life

GSTILE.COM    @GARDENSTATETILE1957