

GARDEN STATE TILE

Together We Can Design For Life

RAINIER



6 COLORS



PINE
1103297 - 8"x48"



BIRCH 1103295 -
8"x48"



TEAK 1103293 -
8"x48"



WHITE OAK
1103296 - 8"x48"



CHESTNUT
1103294 - 8"x48"



POPLAR 1103292
- 8"x48"

1 ECO FRIENDLY SIZE, FINISH

8"x48"



Finish Matte Pressed. Thickness 10mm

Six color variations reproduce with faithfulness of detail the linear and clean graphics of wood to create beautiful interior settings. The result is a union of sinuous veins, nodes, and the typical nuances of the natural material. Emphasized by the **8"x48" pressed** size, which reduces the energy consumption necessary for its production, enhancing further the **eco-friendly** vocation of the collection.



Shower Floor and Wall: 8"x48" Chestnut
Wall and Floor: 8"x48" Pine

PINE



Floor: 8"x48" Chestnut



Floor and Wall: 8"x48" Pine



Floor: 8"x48" Birch

BIRCH



Floor: 8"x48" Teak

TEAK



Floor: 8"x48" White Oak

WHITE OAK



Floor: 8"x48" White Oak



Floor: 8"x48" Birch




Floor: 8"x48" Chestnut

CHESTNUT



Floor: 8"x48" Chestnut

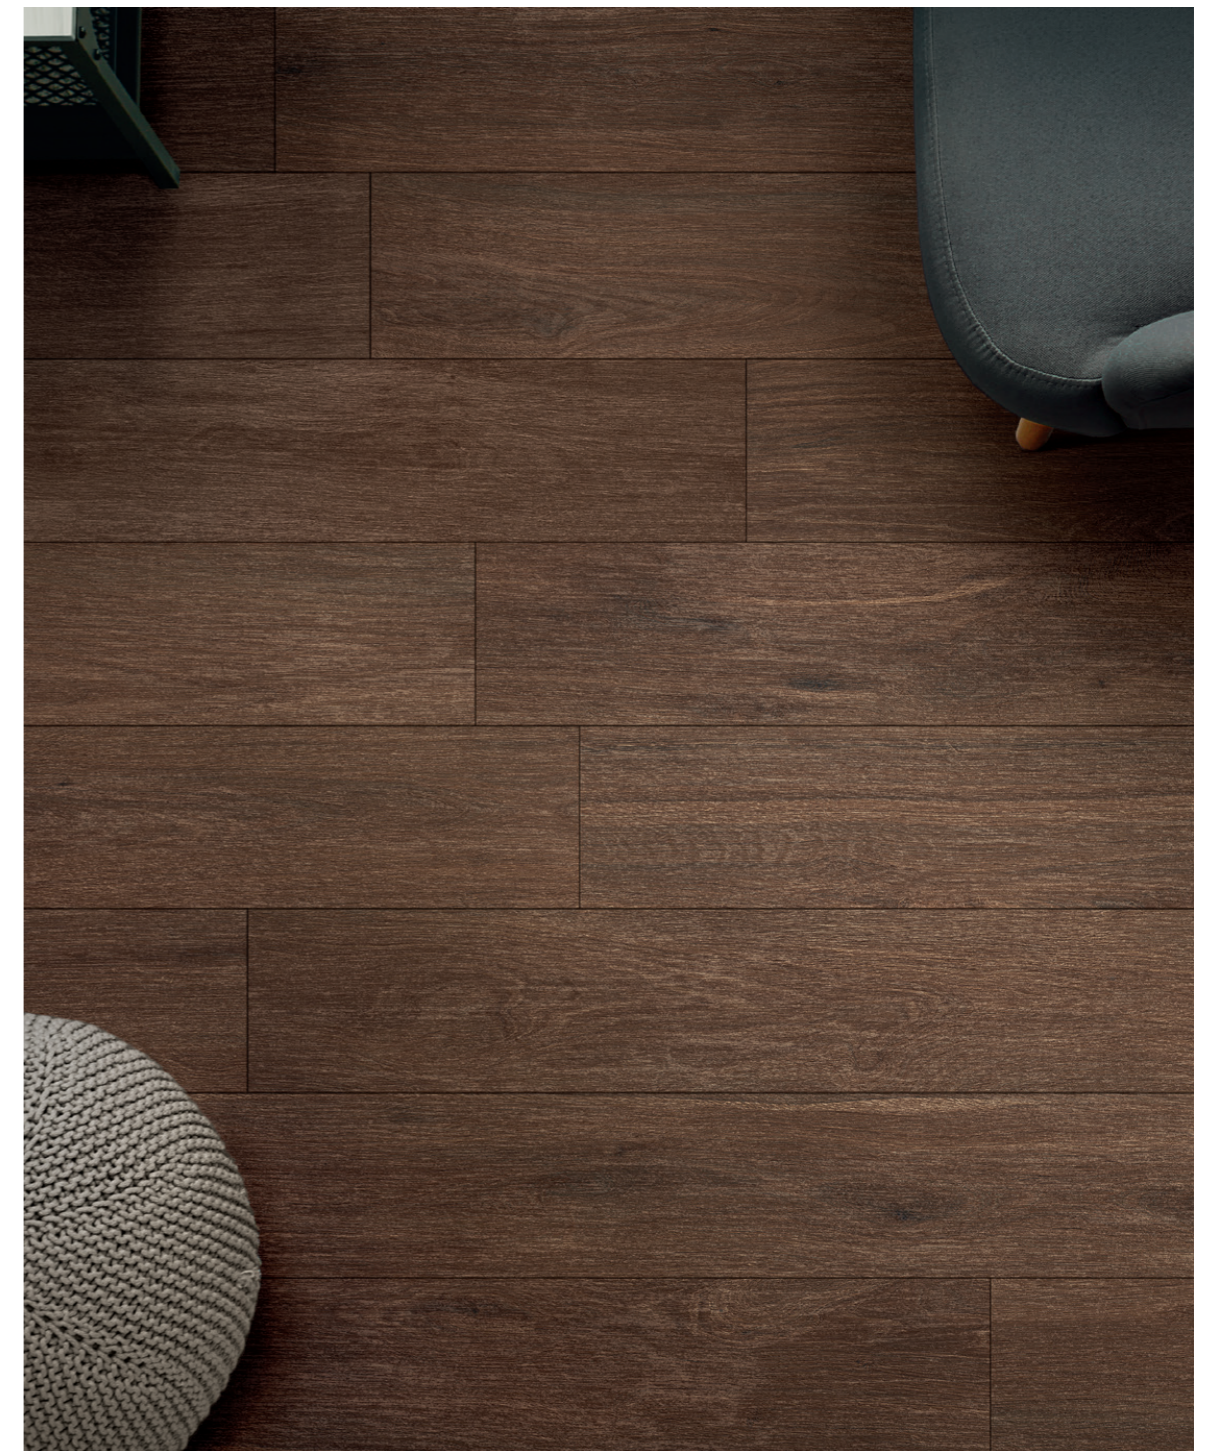

Floor: 8"x48" Teak



Floor: 8"x48" Poplar, Teak

POPLAR
















Technical Specifications

This product meets or exceeds all standards described in ANSI A137.1 & A137.3.

	SPECS	TEST METHOD	INDUSTRY STANDARD	MILE ^{stone} VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET	
			OUTDOOR >0.55 WET	>0.55 WET 2CM & GRIP	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

Green Certifications

 <p>Human Health</p>	 <p>Declare.</p> <p>✓</p> <p>Declare Red List Free</p>	 <p>VERSION 2.0</p> <p>✓</p> <p>HPD measured down to 100ppm</p>	 <p>GREENGUARD</p> <p>PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL 2898</p> <p>GOLD</p> <p>✓</p> <p>Greenguard Gold Certified (Inherently Non-Emitting)</p>
 <p>Ecosystem Health</p>	 <p>✓</p> <p>As much as 64% post-consumer recycled content.</p>	 <p>GREEN SQUARED</p> <p>✓</p> <p>Green Squared Certified</p>	 <p>✓</p> <p>Contains no PFAS, PVC, or VOCs</p>
 <p>Climate Health</p>	 <p>EPD[®]</p> <p>THE INTERNATIONAL EPD[®] SYSTEM</p> <p>✓</p> <p>Third Party verified EPD GWP 6mm - 16.09 kg/m² GWP 8mm - 22.8 kg/m² GWP 2CM - 56.25 kg/m²</p>	 <p>✓</p> <p>100% of the raw material used in the body of our tile is regionally sourced, supporting sustainable practices and local industries.</p>	
 <p>Social Health & Equity</p>	 <p>Certified B Corporation</p> <p>✓</p> <p>Certified B Corp (as of 2025)</p>	 <p>BENEFIT CORPORATION</p> <p>✓</p> <p>Registered Benefit Corporation in the state of TN (as of 2022)</p>	 <p>✓</p> <p>ISO 9001 Certified ISO 14001 Certified</p>



OUR SHOWROOMS

NEW JERSEY

Dover
Princeton
Wall
West Berlin
Wyckoff

PENNSYLVANIA

Bethlehem
Lancaster
Philadelphia
Warminster

SOUTH CAROLINA

Charleston
Columbia

GEORGIA

Savannah

GARDEN STATE TILE

Together We Can Design For Life

GSTILE.COM    @GARDENSTATETILE1957